



Specification of the Asset Administration Shell

Part 1: Metamodel

SPECIFICATION

IDTA Number: 01001
Version 3.2

This specification is part of the [Asset Administration Shell Specification series](#).

Version

This is version 3.2 of the specification IDTA-01001.

Previous version: 3.1.2

Alignment with other AAS Specifications

This version of IDTA-01002 (v3.2) is designed to be used together with the following aligned companion specifications:

Dependency	Specification	Aligned Version	Notes, IDTA-01001 ...
	IDTA-01002 Part 2: Application Programming Interfaces	v3.2	• defines classes and attributes for payload of API operations and query language • defines mapping rules for serialization formats
x	IDTA-01003-a Part 3a: Data Specification Template IEC61360	v3.1	• defines how data specification templates are used in combination with the metamodel • metamodel and data specification template are integrated into the same schema and thus have a strong dependency
x	IDTA-01003-b Part 3b: Data Specification Template Measurement Units	v3.0	• defines how data specification templates are used in combination with the Metamodel • metamodel and data specification template are integrated into the same schema and thus have a strong dependency
	IDTA-01004 Part 4: Security	v3.1	• defines classes and attributes that can be used in access control rules
	IDTA-01005 Part 5: Package File Format (AASX)	v3.2	• defines mapping rules for serialization format(s) of the exchanged Asset Administration Shell referenced via aasx-origin

Bugfix (patch) releases of aligned specifications shall be substituted. Minor versions of aligned specifications IDTA-01001 may be used as long as the corresponding release version of the aligned specification does not have a dependency to a newer release of IDTA-01001.

Notice

Copyright: Industrial Digital Twin Association e.V. (IDTA)

IDTA Number: IDTA-01001

Version: 3.2

DOI: <https://doi.org/10.62628/IDTA.01001-3-2>

This work is licensed under a [Creative Commons Attribution 4.0 International License](#).

SPDX-License-Identifier: CC-BY-4.0

July 2026

How to Get in Contact

Contact: [IDTA](#)

Sources: [GitHub](#)

Feedback:

- [new issues, bugs](#)
- [Questions and Answers](#)

Editorial Notes

History

This document (version 3.2) was produced by the Work Stream "Specification of the Asset Administration Shell" of the Working Group "Open Technology" of the [Industrial Digital Twin Association \(IDTA\)](#).

Version 3.1 was produced by the Work Stream "Specification of the Asset Administration Shell" of the Working Group "Open Technology" of the [Industrial Digital Twin Association \(IDTA\)](#), published in May 2025. It is the first version published as html document and maintained completely open source.

Version 3.0, a major release, was finalized from June 2022 to January 2023 by the joint sub working group "Asset Administration Shell" of the working group "Reference Architectures, Standards and Norms" of the Plattform Industrie 4.0 and the working group "Open Technology" of the Industrial Digital Twin Association (IDTA). It is the first release published by the Industrial Digital Twin Association.

A major change consists in splitting the overall document into four parts: Part 1 (this document) covers the core metamodel of the Asset Administration Shell, Part 5 covers the AASX package exchange format, Part 3 is a series that covers the predefined data specifications and Part 4 covers the security metamodel. Another major change is that the mapping rules for the different supported exchange formats (XML, JSON and RDF) are moved to the GitHub repositories themselves that also contain the schemata. Part 2, the API Specification, was defined in a separate document from the very beginning.

Version 3.0RC02 was produced from November 2020 to May 2022 by the sub working group "Asset Administration Shell" of the joint working group of the Plattform Industrie 4.0 working group "Reference Architectures, Standards and Norms" and the "Open Technology" working group of the Industrial Digital Twin Association.

Version 3.0RC01 of this document, published in November 2020, was produced from November 2019 to November 2020 by the sub working group "Asset Administration Shell" of the Plattform Industrie 4.0 working group "Reference Architectures, Standards and Norms".

The second version V2.0 of this document was produced from August 2018 to November 2019 by the sub working group "Asset Administration Shell" of the Plattform Industrie 4.0 working group "Reference Architectures, Standards and Norms". Version 2.0.I was published in May 2020.

The first version of this document was produced September 2017 to July 2018 by a joint working group with members from ZVEI SG "Models and Standards" and the Plattform Industrie 4.0 working group "Reference Architectures, Standards and Norms ". The document was subsequently validated by the platform's working group "Reference Architectures, Standards and Norms".

For better readability the abbreviation "I4.0" is consistently used for "Industrie 4.0" in compound terms. The term "Industrie 4.0" continues to be used when standing on its own.

Versioning

This specification is versioned using [Semantic Versioning 2.0.0](#) (semver) and follows the semver specification [\[36\]](#) with the following deviations:

- patch releases are bugfix releases and are not necessarily backward compatible. They shall be used.

Conformance

The keywords "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [BCP 14 RFC2119 RFC8174^{\[4\]}](#):

- MUST word, or the terms "REQUIRED" or "SHALL", mean that the definition is an absolute requirement of the specification.
- MUST NOT This phrase, or the phrase "SHALL NOT", mean that the definition is an absolute prohibition of the specification.
- SHOULD This word, or the adjective "RECOMMENDED", mean that there may exist valid reasons in particular circumstances to ignore a particular item, but the full implications must be understood and carefully weighed before choosing a different course.
- SHOULD NOT This phrase, or the phrase "NOT RECOMMENDED" mean that there may exist valid reasons in particular circumstances when the particular behavior is acceptable or even useful, but the full implications should be understood and the case carefully weighed before implementing any behavior described with this label.
- MAY This word, or the adjective "OPTIONAL", mean that an item is truly optional. One vendor may choose to include the item because a particular marketplace requires it or because the vendor feels that it enhances the product while another vendor may omit the same item. An implementation which does not include a particular option MUST be prepared to interoperate with another implementation which does include the option, though perhaps with reduced functionality. In the same vein an implementation which does include a particular option MUST be prepared to interoperate with another implementation which does not include the option (except, of course, for the feature the option provides.)

Terms and Definitions

Terms and Definitions

Please note: the definitions of terms are only valid in a certain context. This glossary applies only within the context of this document.

If available, definitions were taken from IEC 63278-1 Edition 1.0 2023-12.

access control

protection of system resources against unauthorized access; a process by which use of system resources is regulated according to a security policy and is permitted by only authorized entities (users, programs, processes, or other systems) according to that policy

[SOURCE: IEC TS 62443-1-1]

application

software functional element specific to the solution of a problem in industrial-process measurement and control

Note 1 to entry: an application can be distributed among resources and may communicate with other applications.

[SOURCE: IEC TR 62390:2005-01, 3.1.2]

asset

entity owned by or under the custodial duties of an organization, which has either a perceived or actual value to the organization

Note 1 to entry: an asset can be single entity, a collection of entities, an assembly of entities or a composition of entities.

EXAMPLE 1: examples for physical entities are equipment, raw material, parts components and pieces, supplies, consumables, physical products, and waste.

EXAMPLE 2: software is an example of a digital asset.

EXAMPLE 3: a software license is an example of an intangible asset.

[SOURCE: IEC 63278-1:2023, editorial changes]

attribute

data element of a [property](#), a relation, or a class in information technology

[SOURCE: IEC 63278-1:2023; ISO/IEC Guide 77-2; ISO/IEC 27460; IEC 61360]

Asset Administration Shell (AAS)

standardized [digital representation](#) of an [asset](#)

Note 1 to entry: Asset Administration Shell and Administration Shell are used synonymously.

[SOURCE: IEC 63278-1:2023, note added]

class

description of a set of objects that share the same [attributes](#), [operations](#), methods, relationships, and semantics

[SOURCE: IEC TR 62390:2005-01, 3.1.4]

capability

implementation-independent potential of a [component](#) to achieve an effect within a domain

Note 1 to entry: capabilities can be orchestrated and structured hierarchically.

Note 2 to entry: capabilities can be made executable via services.

Note 3 to entry: the impact manifests itself in a measurable effect within the physical world.

[SOURCE: Glossary Industrie 4.0, removed "Industrie 4.0" from "Industrie 4.0 component" and minor changes]

coded value

value that can be looked up in a dictionary and can be translated

[SOURCE: [ECLASS](#) ^[2]]

component

product used as a constituent in an assembled product, [system](#), or plant

[SOURCE: IEC 63278-1:2023; IEC 61666:2010+AMD1:2021 CSV, 3.6]

concept

unit of knowledge created by a unique combination of characteristics

[SOURCE: IEC 63278-1:2023; IEC 61360-1:2016, 3.1.8; ISO 22274:2013, 3.7]

digital representation

information and services representing an entity from a given viewpoint

EXAMPLE 1: examples of information are properties (e.g. maximum temperature), actual parameters (e.g. actual velocity), events (e.g. notification of status change), schematics (electrical), and visualization information (2D and 3D drawings).

EXAMPLE 2: examples of services are asset services (for example providing the history of the configuration data or providing the actual velocity) and asset related services (for example providing a simulation).

EXAMPLE 3: examples of viewpoints are mechanical, electrical, or commercial characteristics.

[SOURCE: IEC 63278-1:2023, editorial changes]

digital twin

[digital representation](#), sufficient to meet the requirements of a set of use cases

Note 1 to entry: in this context, the entity in the definition of digital representation is typically an asset.

[SOURCE: IIC Vocabulary IIC:IIVOC:V2.3:20201025, adapted (an asset, process, or system was changed to an asset)]

explicit value

commonly used concept, like numbers (e.g. 109, 25) which do not need lookup in dictionaries

[SOURCE: [ECLASS](#)]

identifier (ID)

identity information that unambiguously distinguishes one entity from another one in a given domain

Note 1 to entry: there are specific identifiers, e.g. UUID Universal unique identifier, IEC 15418 (GS1).

[SOURCE: Glossary Industrie 4.0]

instance

concrete, clearly identifiable [component](#) of a certain [type](#)

Note 1 to entry: an individual entity of a type, for example a device, is obtained by defining specific property values.

Note 2 to entry: in an object-oriented view, an instance denotes an object of a class (of a type).

[SOURCE: IEC 62890:2016, 3.1.16 65/617/CDV, editorial changes]

instance asset

specific [asset](#) that is uniquely identifiable

EXAMPLE 1: examples of instance assets are material, a product, a part, a device, a machine, software, a control system, or a production system.

[SOURCE: IEC 63278-1:2023, editorial changes]

operation

executable realization of a function

Note 1 to entry: the term method is synonymous to operation.

Note 2 to entry: an operation has a name and a list of parameters [ISO 19119:2005, 4.1.3].

[SOURCE: Glossary Industrie 4.0, editorial changes]

property

defined characteristic suitable for the description and differentiation of products or [components](#)

Note 1 to entry: the concept of type and instance applies to properties.

Note 2 to entry: this definition applies to properties as described in IEC 61360/ ISO 13584-42.

Note 3 to entry: the property types are defined in dictionaries (like IEC component data dictionary or ECLASS), they do not have a value. The property type is also called data element type in some standards.

Note 4 to entry: the property instances have a value and are provided by the manufacturers. A property instance is also called property-value pair in certain standards.

Note 5 to entry: properties include nominal value, actual value, runtime variables, measurement values, etc.

Note 6 to entry: a property describes one characteristic of a given object.

Note 7 to entry: the specification of a property can include predefined choices of values.

[SOURCE: according to ISO/IEC Guide 77-2] as well as [SOURCE: according to Glossary Industrie 4.0], Note 7 removed

qualifier

well-defined element associated with a [property](#) instance or [SubmodelElement](#), restricting the value statement to a certain period of time or use case

Note 1 to entry: qualifiers can have associated values.

[SOURCE: according to IEC 62569-1]

service

distinct part of the functionality that is provided by an entity through interfaces

[SOURCE: IEC 63278-1:2023; IEC 60050-741:2020, 741-01-28]

Submodel

representation of an aspect of an [asset](#)

[SOURCE: IEC 63278-1:2023]

SubmodelElement

element of a [Submodel](#)

[SOURCE: IEC 63278-1:2023]

Submodel template

[template](#) for the representation of an aspect of an [asset](#)

[SOURCE: IEC 63278-1:2023]

Submodel template element

element of a [Submodel template](#)

[SOURCE: IEC 63278-1:2023]

system

interacting, interrelated, or interdependent elements forming a complex whole

[SOURCE: IEC 63278-1:2023; IEC TS 62443-1-1:2009, 3.2.123]

template

specification of the common features of an object in sufficient detail that such object can be instantiated using it

Note 1 to entry: object can be anything that has a type.

[SOURCE: according to ISO/IEC 10746-2]

type

hardware or software element which specifies the common [attributes](#) shared by all instances of the type

[SOURCE: IEC TR 62390:2005-01, 3.1.25]

type asset

(abstract) representation of a set of [instance assets](#) with common characteristics and features

Note 1 to entry: the set of instance assets may exist or may not exist.

EXAMPLE: Examples of type assets are type of material, a product type, a type of a part, a device type, a machine type, a type of software, a type of control system, a type of production system.

[SOURCE: IEC 63278-1:2023]

variable

software entity that may take different values, one at a time

[SOURCE: IEC 61499-1]

Abbreviations Used in this Document

Abbreviation	Description
AAS	Asset Administration Shell
AASX	Package file format for the Asset Administration Shell

Abbreviation	Description
AML	AutomationML, Automation Markup Language
API	Application Programming Interface
BITKOM	Bundesverband Informationswirtschaft, Telekommunikation und neue Medien e. V.
BLOB	Binary Large Object
CDD	Common Data Dictionary
GUID	Globally unique identifier
I4.0	Industrie 4.0
ID	identifier
IDTA	Industrial Digital Twin Association
IEC	International Electrotechnical Commission
IRDI	International Registration Data Identifier
IRI	Internationalized Resource Identifier
ISO	International Organization for Standardization
JSON	JavaScript Object Notation
MIME	Multipurpose Internet Mail Extensions
OPC	Open Packaging Conventions (ECMA-376, ISO/IEC 29500-2)
OPC UA	OPC Unified Architecture maintained by the OPC Foundation
PDF	Portable Document Format
RAMI4.0	Reference Architecture Model Industrie 4.0
RDF	Resource Description Framework
REST	Representational State Transfer
RFC	Request for Comment
SOA	Service Oriented Architecture
UML	Unified Modelling Language
URI	Uniform Resource Identifier
URL	Uniform Resource Locator
URN	Uniform Resource Name

Abbreviation	Description
UUID	Universally Unique Identifier
UTC	Universal Time Coordinated
VDE	Verband der Elektrotechnik, Elektronik und Informationstechnik e.V.
VDI	Verein Deutscher Ingenieure e.V.
VDMA	Verband Deutscher Maschinen- und Anlagenbau e.V.
W3C	World Wide Web Consortium
XML	eXtensible Markup Language
ZIP	archive file format that supports lossless data compression
ZVEI	Zentralverband Elektrotechnik- und Elektronikindustrie e. V.

Abbreviations of Metamodel

The following abbreviations are not used in the document but may be used as abbreviations for the elements in the metamodel defined in this document.

Table 1. Abbreviations for Elements of the Metamodel

Abbreviation	Description
AAS	AssetAdministrationShell
Cap	Capability
CD	ConceptDescription
DE	DataElement
DST	DataSpecification Template
InOut	inoutputVariable
In	inputVariable
Prop	Property
MLP	MultiLanguageProperty
Range	Range
Ent	Entity
Evt	Event
File	File

Abbreviation	Description
Blob	Blob
Opr	Operation
Out	outputVariable
Qfr	Qualifier
Ref	ReferenceElement
Rel	RelationshipElement
RelA	AnnotatedRelationshipElement
SM	Submodel
SMC	SubmodelElementCollection
SME	SubmodelElement
SML	SubmodelElementList

[1] <https://www.ietf.org/rfc/rfc2119.txt>

[2] In IEC61360:2017, this refers to a "term" of a value list

Preamble

Scope of this Document

The aim of this document is to define the structure of the Administration Shell to enable the meaningful exchange of information about assets and I4.0 components between partners in a value creation network.

This part of the document focuses on how such information needs to be processed and structured. In order to define these specifications, the document formally stipulates some structural principles of the Administration Shell. This part does not describe technical interfaces of the Administration Shell or other systems to exchange information, protocols, or interaction patterns.

This document focuses on:

- a metamodel for specifying information of an Asset Administration Shell and its submodels,
- an introduction to the need of mappings to suitable technologies used in different life cycle phases of a product, providing mappings for XML, JSON, and RDF.

This document presumes some familiarity with the concept of the Asset Administration Shell. Some of the concepts are described in Annex [Concepts AAS](#) for convenience's sake. The concepts are being standardized as IEC standard IEC 63278 series, [\[44\]](#) and [\[37\]](#). The main stakeholders addressed in this document are architects and software developers aiming to implement a digital twin using the Asset Administration Shell in an interoperable way. Additionally, the content can also be used as input for discussions with international standardization organizations and further initiatives. Please consult the continuously updated reading guide [\[38\]](#) for an overview of documents on the Asset Administration Shell. The reading guide gives advice on which documents should be read depending on the role of the reader.

Structure of the Document

All clauses that are normative have "(normative)" as a suffix in the heading of the clause.

[Terms and Definitions](#) provides terms and definitions as well as abbreviations, both for abbreviations used in the document and for abbreviations that may be used for elements of the metamodel defined in this document.

[Introduction](#) gives a short introduction into the content of this document.

[Specification \(normative\)](#) is the main normative part of the document. It stipulates structural principles of the Administration Shell in a formal manner to ensure an exchange of information using Asset Administration Shells. A UML diagram has been defined for this purpose.

[Data Specifications](#) explains how to define predefined data specifications, including those for defining concept descriptions. A discussion on the difference of data specification templates, inheritance, qualifiers and categories can be found in the [Annex](#).

[Mappings \(normative\)](#) provides information on the exchange of information compliant to this specification in existing data formats like XML, JSON, or RDF. For this purpose additional formats are defined as well as needed text serializations of complex types.

[Summary and Outlook](#) summarizes the content and gives an outlook on future work.

Annex [Concepts AAS](#) contains additional background information on Asset Administration Shell. Annex [General Topics](#) summarizes relevant, existing content from the standardization of Industry 4.0; i.e. it provides an overview and explains the motives, but is not absolutely necessary for an understanding of the specification.

Annex [Value Only Serialization Example](#) and example of a Value-Only serialization as explained in [Mappings](#) is given.

Annex [Backus Naur Form](#) defines the grammar language used in the specification. Annex [UML](#) contains information about UML, while Annex [UML Templates](#) provides the tables used to specify UML classes etc. as used in this specification.

Annex [Grammar Semantic IDs for Metamodel](#) explains how semantic identifiers for the elements of the metamodel itself are derived.

[Handling Constraints](#) explains the numbering of constraints used in the specification. An overview of all constraints contained in the specification can be found in [Overview Constraints](#).

Annex [Usage Metamodel](#) provides some hints for modelers. Annex [Metamodel With Inheritance](#) shows selected metamodel diagrams including all inherited attributes for developers.

The [Change Notes](#) describes metamodel changes compared to previous versions.

Finally, a [Bibliography](#) is given.

Working Principles

The work is based on the following principle: keep it simple but do not simplify if it affects interoperability.

To create a detailed specification of the Administration Shell according to the scope of Part 1 result papers published by Plattform Industrie 4.0, the trilateral cooperation between France, Italy, and Germany, as well as international standardization results were analyzed and taken as source of requirements for the specification process. As many ideas as possible from the discussion papers were considered. See Annex [Concepts AAS](#) for more information.

The partners represented in the [Plattform Industrie 4.0](#) and the [Industrial Digital Twin Association \(IDTA\)](#) and associations such as [ZVEI](#), [VDMA](#), [VDI/VDE](#) and [Bitkom](#), ensure that there is broad sectoral coverage of process, hybrid, and factory automation and in terms of integrating information technology (IT) and operational technology (OT).


Design alternatives were intensively discussed within the working group. An extensive feedback process of this document series is additionally performed conformant to the review process as defined by IDTA.

Guiding principle for the specification was to provide detailed information, which can be easily implemented also by small and medium-sized enterprises.

Introduction

This document specifies the metamodel of the Asset Administration Shell.

The general concept and the structure of the Asset Administration Shell is described in IEC 63278-1 (see [Figure 1](#)).

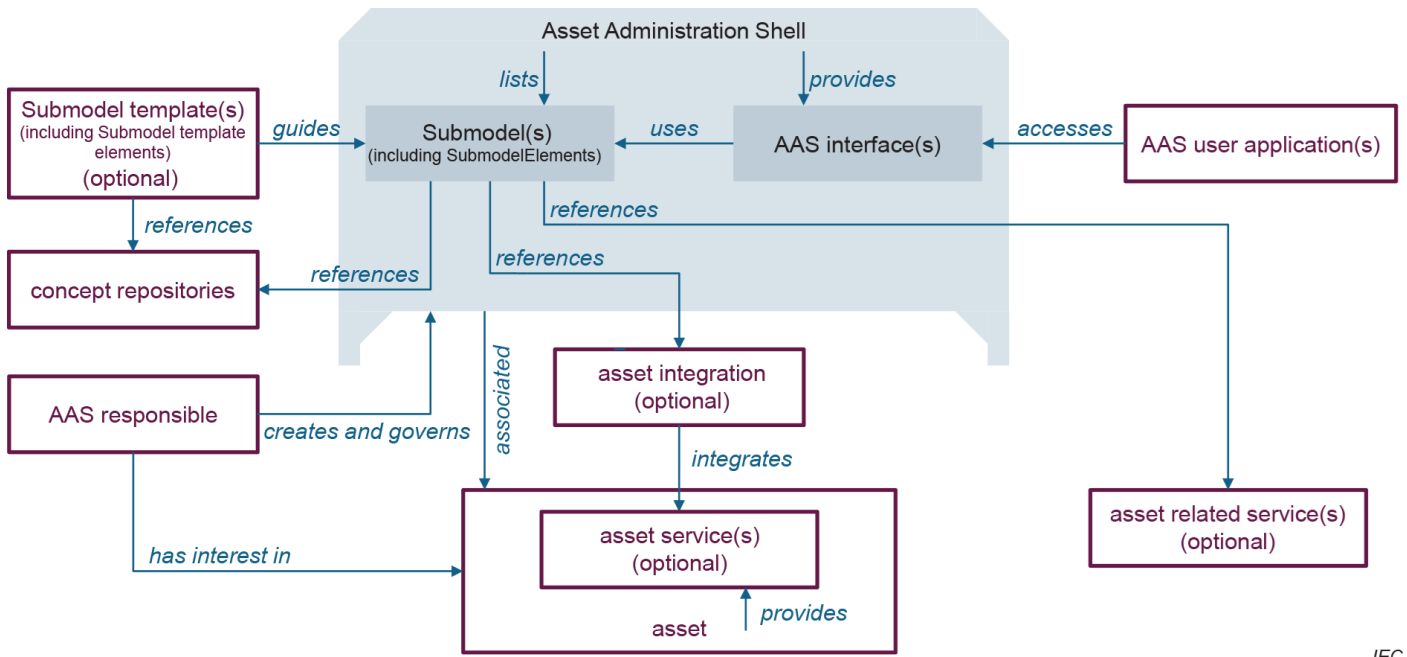

IEC

Figure 1. Asset Administration Shell and its Stakeholders (Source: IEC 63278-1)

These are the main specifics and stakeholders defined for the Asset Administration Shell:

- an Asset Administration Shell is associated to an asset;
- an Asset Administration Shell provides AAS interface(s);
- there are one or more Submodels listed in an Asset Administration Shell;
- an AAS responsible has an interest in an asset, and based on this interest creates and governs an Asset Administration Shell;
- an AAS user application accesses an Asset Administration Shell via its AAS interface(s) for use by humans or for automated processing;
- a Submodel template may serve as guidance for a Submodel.
- Submodels reference concept repositories;
- a Submodel template may be used to serve as guidance for a Submodel and references concept repositories;
- asset can provide asset services;
- Submodels may reference asset services via an asset integration and may also reference asset related services.

This document specifies a technology-neutral specification of the information metamodel of the Asset Administration Shell in UML. It serves as the basis for deriving several different formats for exchanging Asset Administration Shells, e.g. for XML, JSON, and RDF.

[Figure 2](#) shows the different ways of exchanging information Asset Administration Shells. This part of the "Specifications of the Asset Administration Shell" series is the basis for all of these types of information exchange.

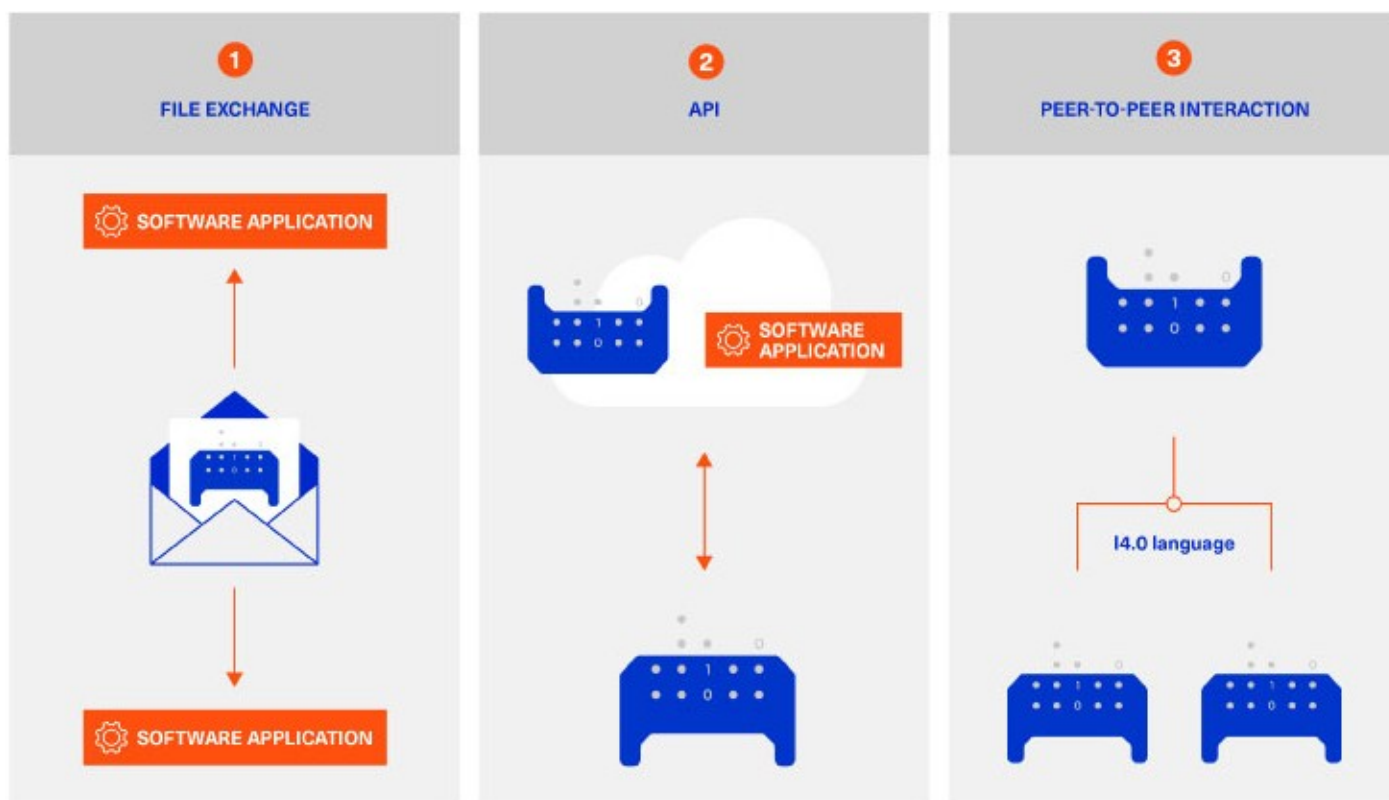


Figure 2. Types of Information Exchange via Asset Administration Shells

File exchange (1) is described in detail in Part 5 of this document series.

The API (2) based on the information metamodel specified in this document is specified in Part 2 of the document series "Specification of the Asset Administration Shell" (IDTA-01002) [\[37\]](#).

The I4.0 language (3) is based on the information metamodel specified in this document [\[47\]](#).

Specification (normative)

This clause specifies the information metamodel of the Asset Administration Shell.

An overview of the metamodel of the Asset Administration Shell is given in Subclause [Overview](#). Subclause [Designators](#) describes the classes and all their attributes in detail.

The legend of the UML diagrams and the table specification of the classes is explained in Annex [UML Templates](#) and Annex [UML](#). Readers familiar with UML may skip [OMG UML General](#). It is however recommended to have a look at the [specifics](#) used in this modelling, especially those on dealing with model references.

Overview

This clause gives an overview of the main classes of the Asset Administration Shell (AAS) metamodel.

[Figure 3](#) shows the main classes to describe a single Asset Administration Shell.

An Asset Administration Shell represents exactly one asset ([AssetAdministrationShell/assetInformation](#)). Type assets and instance assets are distinguished by the attribute [AssetInformation/assetKind](#). See [Core Classes](#) for details.

Note: the UML modelling uses so-called abstract classes for denoting reused concepts like "HasSemantics", "Qualifiable" etc.

In case of an Asset Administration Shell of an instance asset, a reference to the Asset Administration Shell representing the corresponding type asset or another instance asset it was derived from may be added ([AssetAdministrationShell/derivedFrom](#)). The same holds true for the Asset Administration Shell of a type asset. Types can also be derived from other types.

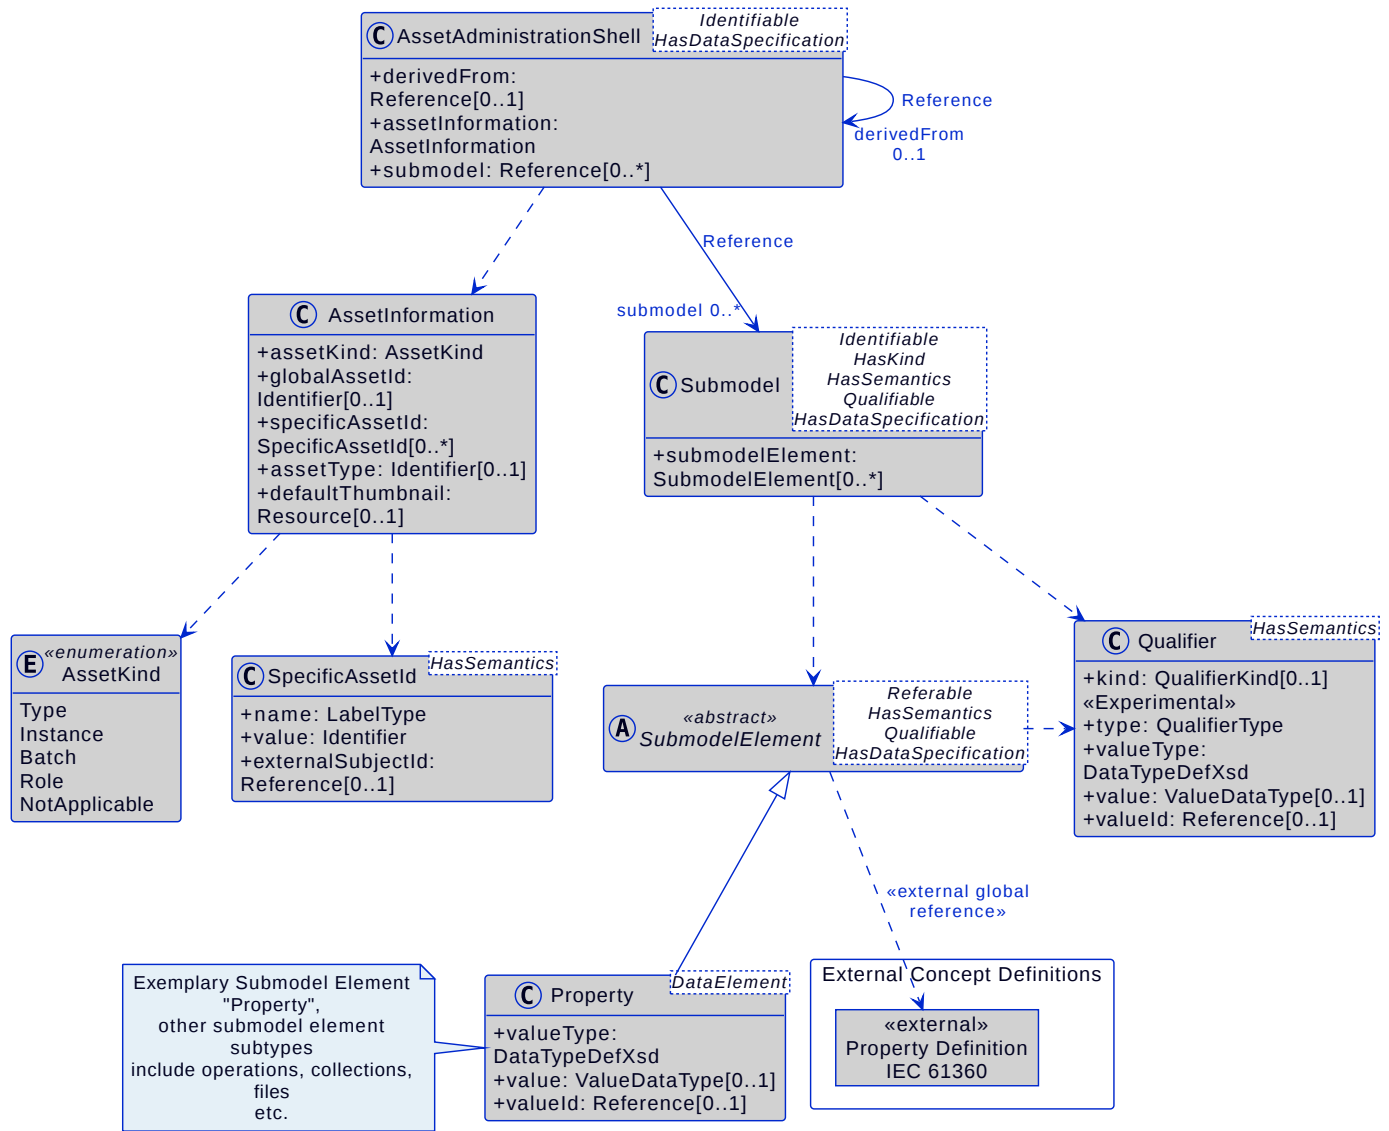


Figure 3. Overview Metamodel of the Asset Administration Shell

An asset may typically be represented by several different identification properties like the serial number, the manufacturer part ID or the different customer part IDs, its RFID code, etc. Such external identifiers are defined as specific asset IDs ([AssetInformation/specificAssetId](#)), each characterized by a user-defined name, a value, and the user domain (tenant, subject in Attribute Based Access Control). See [Asset Information Attributes](#) for details. Additionally, a global asset identifier should be assigned to the asset ([AssetInformation/globalAssetId](#)) as early as possible to allow for consistent data exchange across the borders of a company or user domain.

Asset Administration Shells, submodels and concept descriptions need to be globally uniquely identifiable ([Identifiable](#)). Other elements like properties only need to be referable within the model and thus only require a local identifier (*idShort* from [Referable](#)). For details on identification, see [Identification of Elements](#).

[Submodel](#)s consist of a set of SubmodelElements. SubmodelElements may be qualified by a so-called [Qualifier](#). There might be more than one qualifier per [Qualifiable](#).

There are different subtypes of SubmodelElements like properties, operations, lists, etc. See [Submodel Element Types](#) for details. A typical SubmodelElement is shown in the overview figure: a property is a data element that has a value of simple type like string, date, etc. Every data element is a SubmodelElement (not visible in the figure but implicitly the case, since [DataElement](#) is inheriting from [SubmodelElement](#)). For details on properties, see [Property Attributes](#).

Every SubmodelElement needs a semantic definition (*semanticId* in [HasSemantics](#)) to have a well-defined meaning. The SubmodelElement might either refer directly to a corresponding semantic definition provided by an external reference (e.g. to an ECLASS or IEC CDD property definition), or it may indirectly reference a concept description ([Concept Descriptions](#)). See [Matching Strategies](#) for matching strategies.

A concept description may be derived from another property definition of an external standard or another concept description ([ConceptDescription/isCaseOf](#)).

Note: in this case, most of the attributes are redundant because they are defined in the external standard. Attributes for information like *preferredName*, *unit* etc. are added to increase usability. For details see IDTA-01003-a. Consistency w.r.t. the referenced SubmodelElement definitions should be ensured by corresponding tooling.

If a concept description is not just a copy or refinement of an external standard, the provider of the Asset Administration Shell using this concept description shall be aware that interoperability with other Asset Administration Shells cannot be ensured.

Data specification templates ([DataSpecification](#)) can be used to define a named set of additional attributes (besides those predefined by the metamodel) for an element. The data specification template following IEC 61360 is typically used for the concept description of properties, providing e.g. an attribute "preferredName". The `<<template>>` dependency is used to denote recommended data specification templates. See [Data Specifications](#) for details.

Data specification templates like the template for IEC 61360 property definitions (Part 3a, IDTA-01003-a) are explicitly predefined and recommended to be used by IDTA. See [Data Specifications](#) for details. If proprietary templates are used, interoperability with other Asset Administration Shells cannot be ensured.

Besides SubmodelElements including properties and concept descriptions, other identifiable elements may also use additional templates ([HasDataSpecification](#)). Data specification templates are selected at design time.

[Figure 4](#) gives a complete overview of all elements defined in the metamodel and specified in [Specification \(normative\)](#). The UML packages reflect the structure of [Designators](#). The elements of package "Core" are specified as first class citizens in [Core Classes](#), except for their imported packages: the elements of package "SubmodelElements" are specified in [Submodel Element Types](#). Elements of package "Common" are specified in [Common Attributes](#). The elements of package "Referencing" are specified in [Referencing](#). Elements from package "Types" are specified in [Data Types](#). Elements from package "Environment" are specified in [Environment](#). Elements from package "ConceptDescriptions" are specified in [Concept Descriptions](#). The only package that is not listed is "Data Specifications (Templates)" because data specifications are handled differently. Data specification templates are explained in [Data Specifications](#). Packages with Suffix "Entities" contain elements that are data types of attributes in other classes.

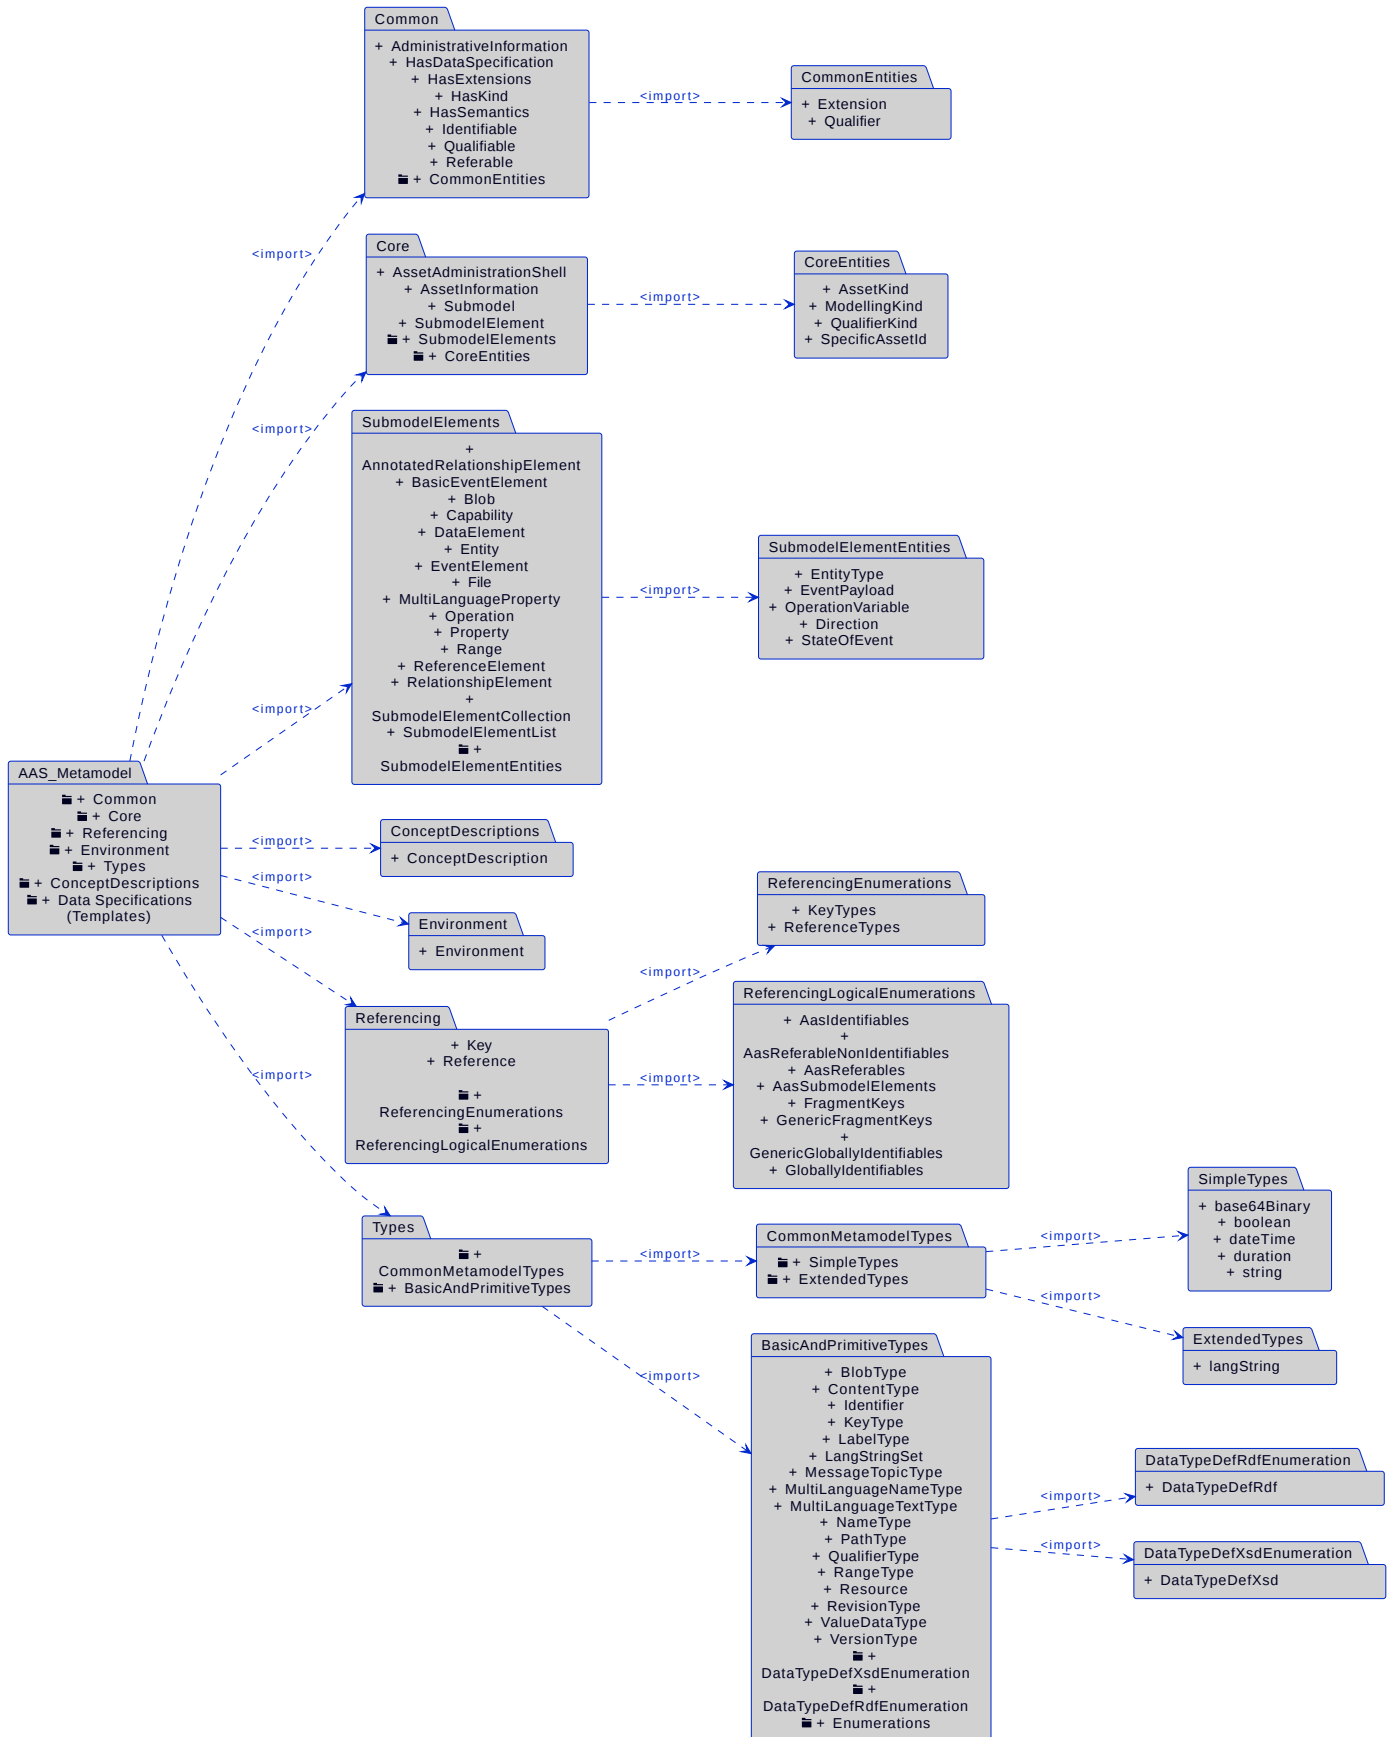


Figure 4. Metamodel Package Overview

Figure 5 shows the so-called environment. The environment's purpose is to list all Asset Administration Shells, all submodels, and all concept descriptions – in other word, all identifiables within an ecosystem.

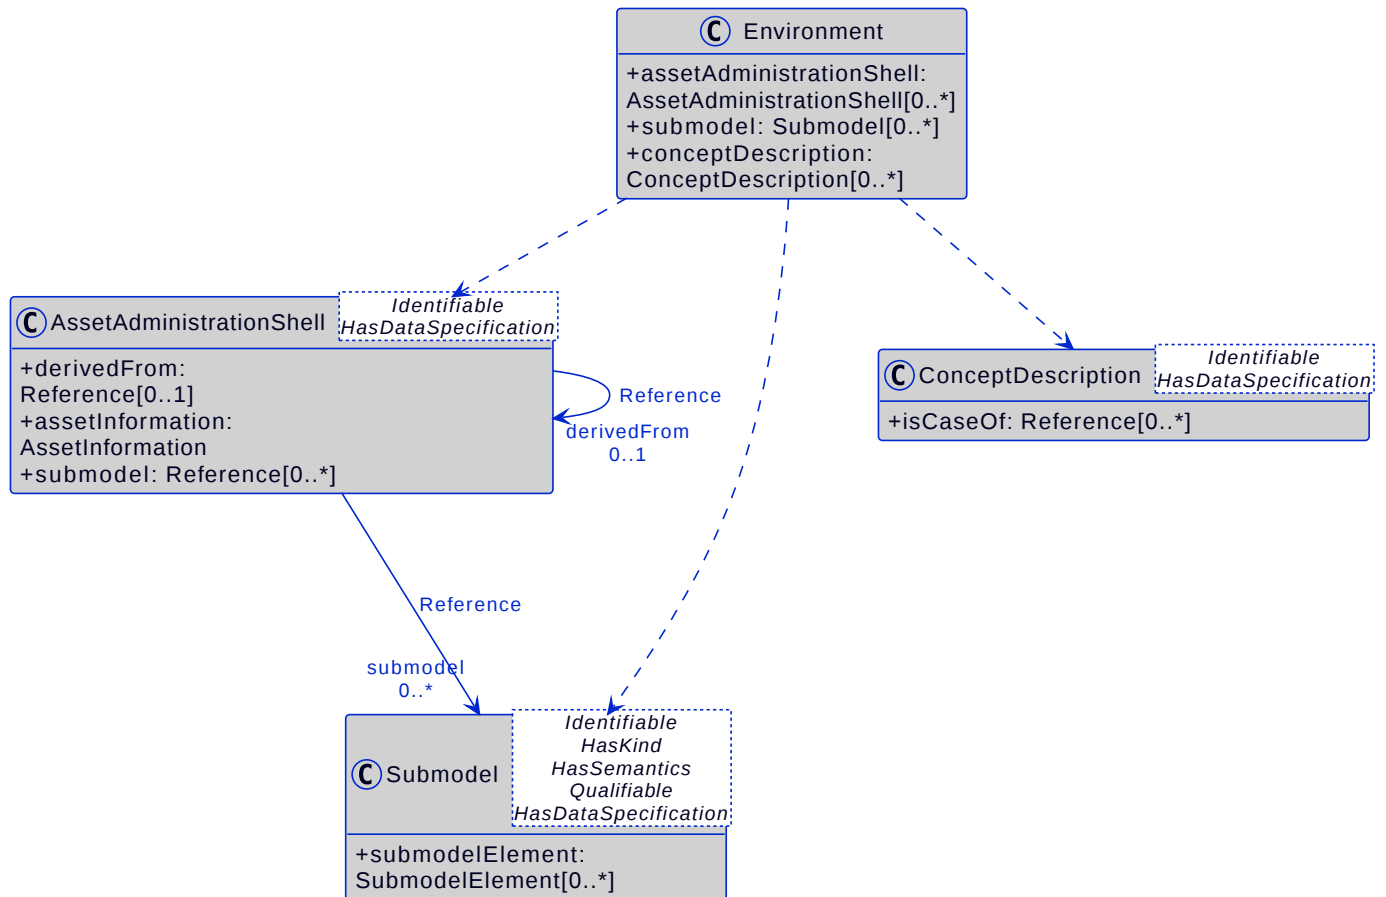


Figure 5. Metamodel of Environment

Designators

This clause specifies the classes of the metamodel in detail. An overview is provided in [Overview](#). Annex [UML](#) explains UML modelling together with the specifics used in this specification. Annex D depicts the templates used to describe the classes and relationships. Annex G shows some of the diagrams together with all their inherited attributes to give a complete overview.

To understand the specifications, it is crucial to understand the common attributes first ([Common Attributes](#)). They are reused throughout the specifications of the other classes ("inherits from") and define important concepts like identifiable, qualifiable, etc. They are abstract, i.e. there is no object instance of such classes.

The concept of referencing and how a reference is represented in the UML diagrams and the tables is explained in [Referencing](#) and Annex [UML](#).

Constraints that are no invariants of classes are specified in [Constraints](#).

A minimum recursion depth of 32 for [Container-Elements](#) should be supported.

Note: This means for certification a maximum of 32 recursion test cases should be tested.

Common Attributes

General

This clause specifies the abstract classes that represent commonly used attributes and terminology, together with the classes and data types exclusively used in these classes. They are represented in alphabetical order.

Administrative Information Attributes

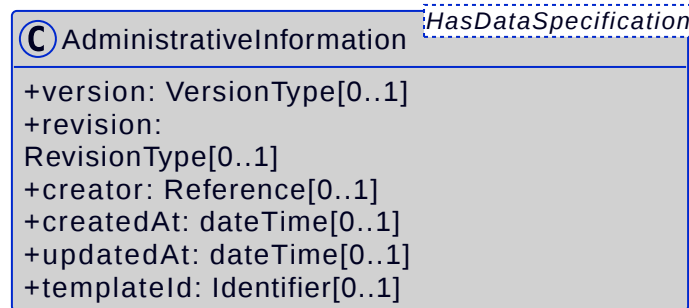


Figure 6. Metamodel of Administrative Information

Every identifiable may contain administrative information.

In principle, a version corresponds to the *version_identifier* according to IEC 62832. However, it is not used for concept identifiers only (IEC TS 62832-1), but for all identifiable elements. Together, [\[spec-metamodel::common::version\]](#) and [\[spec-metamodel::common::revision\]](#) correspond to the version number according to IEC 62832.

Other attributes of the administrative information like [\[spec-metamodel::common::creator\]](#) refer to ISO 15836-1:2017, the Dublin Core metadata element set.

For more information on the concept of subject as used to describe the [\[spec-metamodel::common::creator\]](#), see Attribute Based Access Control (ABAC) [\[49\]](#). The assumption is that every subject has a unique identifier.

[AdministrativeInformation](#) allows the usage of templates ([HasDataSpecification](#)). Data specifications are defined in IDTA-01003 sub-series.

If an AAS contains two different Submodels with the same semanticId ([Submodel/semanticId](#)) they shall differ in their ([Submodel/administration](#))

a) [version](#) ([revision](#) is ignored)

or in their

b) [createdAt](#) or [updatedAt](#) date

or in their

c) [creator](#)

or in their

d) [supplementalSemanticId](#)

or in their

e) [templateId](#)

Note: Per specification the [IDs](#) of any two submodels in an Asset Administration Shell can never be identical.

With a) both submodels shall have version information. With b) both submodels shall have date information. With c) both submodels shall have a [creator](#). With d) at least one of the two submodels shall have a [supplementalSemanticId](#). With e) both submodels shall specify the [templateId](#), i.e. which Submodel Template Specification guided their creation.

Note 1: typically, some of the administrative information like the version number might be part of the identification

([Submodel/id](#)). This is similar to the handling of identifiers for concept descriptions using IRDIs. In ECLASS, the IRDI 0173-1#02-AO677#002 contains the version information 002.

If an AAS contains two different Submodels guided by the same Submodel Template (SMT), i.e. have the same `templateId` value (`Submodel/administration/templateId`), then the two submodels shall have different IDs ([Submodel/id](#)). In this case both Submodels shall have a `templateId` assigned to them ([Submodel/administration/templateId](#)).

Note 2: in some cases there is neither a `semanticId` ([Submodel/semanticId](#)) nor a template ID ([Submodel/administration/templateId](#)) defined for the Submodel. In this case there is no way for the data consumer to formally see whether two Submodels are providing the same semantic information.

Note 3: if a template ID ([Submodel/administration/templateId](#)) of one of the standardized Submodel Templates of the IDTA is used to guide the creation of a Submodel then there is also a semantic ID defined for the Submodel.

Note 4: Up to now [AdministrativeInformation/templateId](#) is only applicable for Submodels since Template Specifications are standardized for Submodels only.

To ensure reliable sorting and enable logical comparisons, the [\[spec-metamodel::common::version\]](#) and [\[spec-metamodel::common::revision\]](#) attributes are stored as numerical integer types rather than as text strings. This design prevents common sorting errors (e.g., a text-based sort incorrectly placing "V1.10" before "V1.2") and allows the system to mathematically determine which release is newer.

For display purposes, these numbers are typically concatenated into a human-readable string, such as `V<version>.<revision>`.

This numerical system creates a clear and logical order of precedence, where a higher version or revision number always indicates a later release:

`V1.0 < V1.1 < V2.0`

The date attribute [\[spec-metamodel::common::createdAt\]](#) is bound to the identity of the object itself, not to its individual version states. This means that while an object's [\[spec-metamodel::common::version\]](#) or [\[spec-metamodel::common::revision\]](#) will increment over time, its `createdAt` timestamp remains fixed to the moment the object was first created.

The date attribute [\[spec-metamodel::common::updatedAt\]](#), however, tracks when relevant modifications occur. Because the version and revision increment if there are relevant updates to the object over time, a higher version number mathematically implies a later `updatedAt` timestamp than that of its previous version states. For example, the `updatedAt` timestamp of V2.0 will be later than the `updatedAt` timestamp of V1.1.

Finally, for any given state of the object, a fundamental rule applies to these timestamps: the [\[spec-metamodel::common::updatedAt\]](#) timestamp is always greater than or equal to the [\[spec-metamodel::common::createdAt\]](#) timestamp, meaning an update can never occur before the initial creation of the object.

Note 5: It is important to clarify that not every change to an object's data will necessarily trigger a new release (update of [\[spec-metamodel::common::version\]](#) or [\[spec-metamodel::common::revision\]](#) attributes) or an update to the [\[spec-metamodel::common::updatedAt\]](#) timestamp. The [\[spec-metamodel::common::version\]](#), [\[spec-metamodel::common::revision\]](#), [\[spec-metamodel::common::createdAt\]](#), and [\[spec-metamodel::common::updatedAt\]](#) attributes should be treated as business values, not technical system values. Their purpose is to mark significant, business-relevant milestones in an object's lifecycle. For more dynamic or

transient data—such as real-time calculations or temporary status flags—incrementing the version for every fluctuation would be impractical and would not make sense from a business logic perspective.

Class:	<i>AdministrativeInformation</i>		
Explanation:	Administrative metainformation for an element Constraint AASd-005: If AdministrativeInformation/version is not specified, AdministrativeInformation/revision shall also be unspecified. This means that a revision requires a version. If there is no version, there is no revision. Revision is optional.		
Inherits from:	HasDataSpecification		
ID:	https://admin-shell.io/aas/3/2/AdministrativeInformation		
Attribute	ID		
	Explanation	Type	Card.
<i>version</i>	https://admin-shell.io/aas/3/2/AdministrativeInformation/version		
	Version of the element	VersionType	0..1
<i>revision</i>	https://admin-shell.io/aas/3/2/AdministrativeInformation/revision		
	Revision of the element	RevisionType	0..1
<i>creator</i>	https://admin-shell.io/aas/3/2/AdministrativeInformation/creator		
	The subject ID of the subject responsible for making the element	Reference	0..1
<i>createdAt</i>	https://admin-shell.io/aas/3/2/AdministrativeInformation/createdAt		
	date of creation	DateTimeUtc	0..1
<i>updatedAt</i>	https://admin-shell.io/aas/3/2/AdministrativeInformation/updatedAt		
	date of update	DateTimeUtc	0..1

<i>templateId</i>	https://admin-shell.io/aas/3/2/AdministrativeInformation/templateId		
	Identifier of the template that guided the creation of the element Note 1: in case of a submodel, the template ID is the identifier of the Submodel template that guided the creation of the submodel. Note 2: the Submodel template ID is not relevant for validation. Here, the <i>Submodel/semanticId</i> shall be used. Note 3: usage of the template ID is not restricted to Submodel instances. The creation of Submodel templates can also be guided by another Submodel template.	Identifier	0..1

Has Data Specification Attributes




Figure 7. Metamodel of HasDataSpecification

Class:	<i>HasDataSpecification</i> <<abstract>>		
Explanation:	Element that can be extended by using data specification templates. A data specification template defines a named set of additional attributes an element may or shall have. The data specifications used are explicitly specified with their global ID.		
Inherits from:	—		
ID:	https://admin-shell.io/aas/3/2/HasDataSpecification		
Attribute	ID		
	Explanation	Type	Card.

<i>dataSpecification</i>	https://admin-shell.io/aas/3/2/HasDataSpecification/dataSpecification		
	External reference to the data specification template used by the element	Reference	0..*
Note: this is an external reference.			

For more details on data specifications, please see [Data Specifications](#).

Has Extensions Attributes

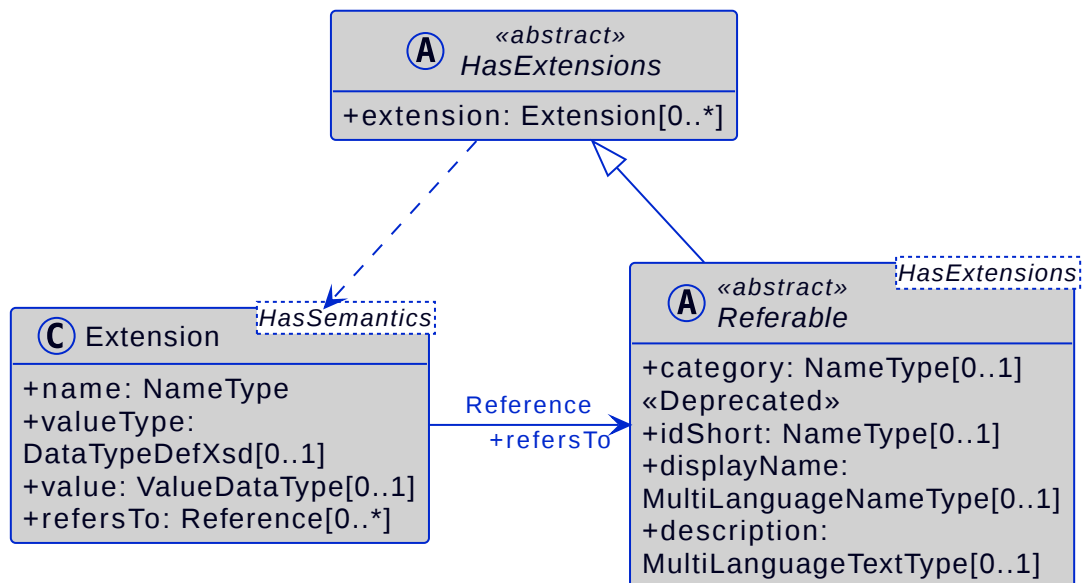


Figure 8. Metamodel of Has Extensions

Class:	<i>HasExtensions</i> <<abstract>>		
Explanation:	Element that can be extended by proprietary extensions		
	Note 1: see Constraints for Extensions for constraints related to extensions.		
	Note 2: extensions are proprietary, i.e. they do not support global interoperability.		
Inherits from:	—		
ID:	https://admin-shell.io/aas/3/2/HasExtensions		
Attribute	ID		
	Explanation	Type	Card.
<i>extension</i>	https://admin-shell.io/aas/3/2/HasExtensions/extension		
	An extension of the element.	Extension	0..*

Class:	<i>Extension</i>		
Explanation:	Single extension of an element		
Inherits from:	HasSemantics		
ID:	https://admin-shell.io/aas/3/2/Extension		
Attribute	ID		
	Explanation	Type	Card.
<i>name</i>	https://admin-shell.io/aas/3/2/Extension/name		
	Name of the extension	NameType	1
<i>valueType</i>	https://admin-shell.io/aas/3/2/Extension/valueType		
	Data type of the value attribute of the extension Default: xs:string	DataTypeDefXsd	0..1
<i>value</i>	https://admin-shell.io/aas/3/2/Extension/value		
	Value of the extension	ValueDataType	0..1
<i>refersTo</i>	https://admin-shell.io/aas/3/2/Extension/refersTo		
	Reference to an element the extension refers to	ModelReference< Referable >	0..*

Has Kind Attributes

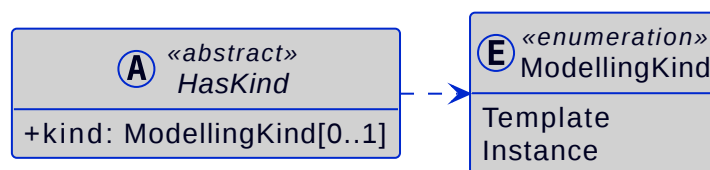


Figure 9. Metamodel of HasKind

Class:	<i>HasKind</i>
Explanation:	An element with a kind is an element that can either represent a template or an instance. Default for an element is that it is representing an instance.
Inherits from:	—
ID:	https://admin-shell.io/aas/3/2/HasKind

Attribute	ID		
	Explanation	Type	Card.
<i>kind</i>	https://admin-shell.io/aas/3/2/HasKind/kind		
	Kind of the element: either template or instance	ModellingKind	0..1
	Default Value = <i>Instance</i>		

The kind enumeration is used to denote whether an element is of kind *Template* or *Instance*. It is used to distinguish between submodels and Submodel templates.

Enumeration:	<i>ModellingKind</i>
Explanation:	Enumeration for denoting whether an element is a template or an instance
Set of:	—
ID:	https://admin-shell.io/aas/3/2/ModellingKind
Literal	ID
	Explanation
<i>Template</i>	https://admin-shell.io/aas/3/2/ModellingKind/Template
	specification of the common features of a structured element in sufficient detail that such an instance can be instantiated using it
<i>Instance</i>	https://admin-shell.io/aas/3/2/ModellingKind/Instance
	concrete, clearly identifiable element instance. Its creation and validation may be guided by a corresponding element template

Has Semantics Attributes

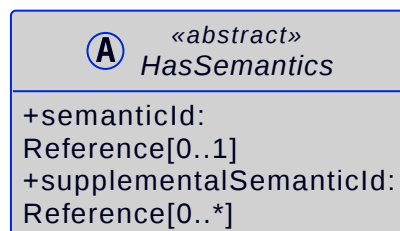


Figure 10. Metamodel of Semantic References (*HasSemantics*)

For matching algorithm, see [Matching Strategies for Semantic Identifiers](#).

Class:	<i>HasSemantics</i> <<abstract>>
---------------	----------------------------------

Explanation:	Element that can have a semantic definition plus some supplemental semantic definitions		
	Constraint AASd-118: If a supplemental semantic ID (HasSemantics/supplementalSemanticId) is defined, there shall also be a main semantic ID (HasSemantics/semanticId).		
Inherits from:	—		
ID:	https://admin-shell.io/aas/3/2/HasSemantics		
Attribute	ID		
	Explanation	Type	Card.
<i>semanticId</i>	https://admin-shell.io/aas/3/2/HasSemantics/semanticId		
	Identifier of the semantic definition of the element called semantic ID or also main semantic ID of the element	Reference	0..1
<i>supplementalSemanticId</i>	https://admin-shell.io/aas/3/2/HasSemantics/supplementalSemanticId		
	Identifier of a supplemental semantic definition of the element called supplemental semantic ID of the element	Reference	0..*

Identifiable Attributes

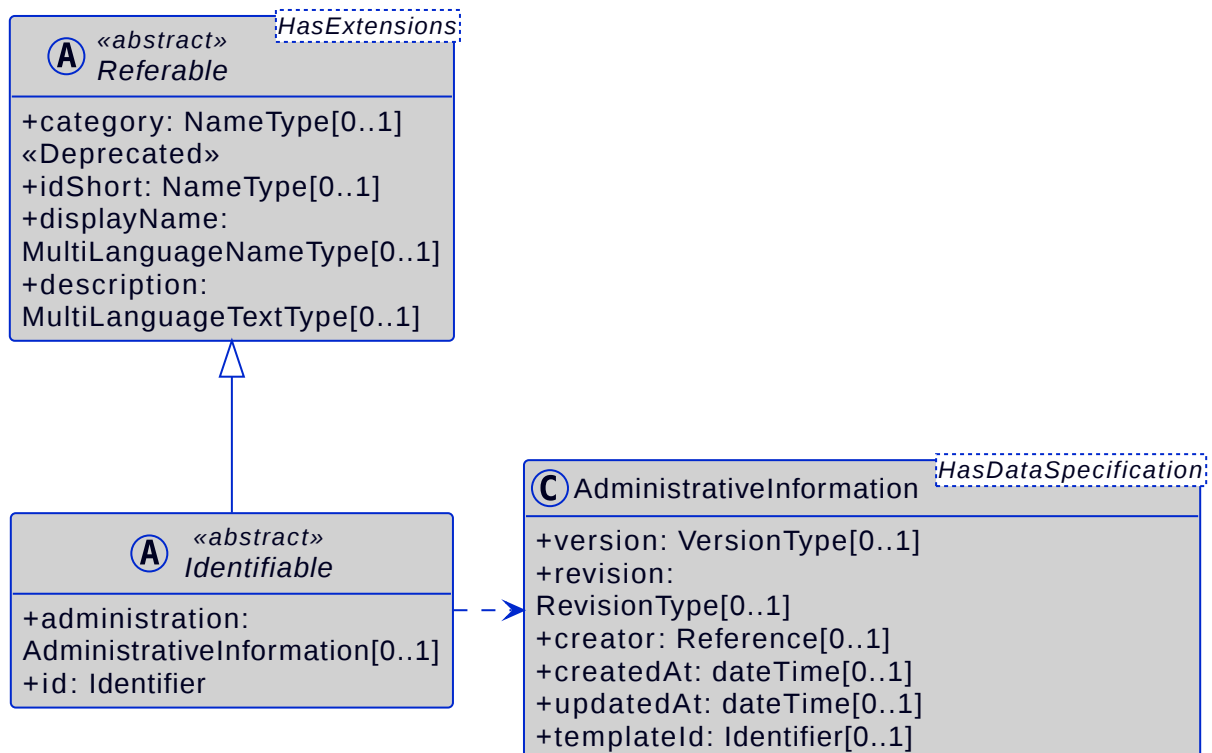


Figure 11. Metamodel of Identifiables

An identifiable element is a referable with a globally unique identifier (*Identifier*). Only the global ID (*Identifiable/id*) shall be used to reference an identifiable, because the *idShort* is not unique for an identifiable. Identifiables may have administrative information like version, etc.

Non-identifiable referable elements can be referenced. However, this requires the context of the element. A referable that is not identifiable and not child within a SubmodelElementList has a short identifier (*idShort*) that is unique just in its context, its name space.

Information about identification can be found in [Identification of Elements](#). See [Which Identifiers for Which Elements?](#) for constraints and recommendations on when to use which type of identifier.

See [Which Identifiers for Which Elements?](#) for information about which identifier types are supported.

Class:	Identifiable <<abstract>>		
Explanation:	An element that has a globally unique identifier Note: see for constraints related to identifiables.		
Inherits from:	Referable		
ID:	https://admin-shell.io/aas/3/2/Identifiable		
Attribute	ID		
	Explanation	Type	Card.
administration	https://admin-shell.io/aas/3/2/Identifiable/administration		
	Administrative information of an identifiable element Note: some of the administrative information like the version number might need to be part of the identification.	AdministrativeInformation	0..1
id	https://admin-shell.io/aas/3/2/Identifiable/id		
	The globally unique identification of the element	Identifier	1

Qualifiable Attributes

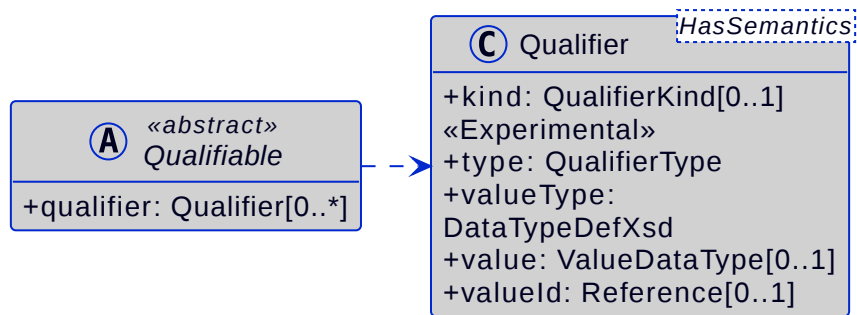


Figure 12. Metamodel of Qualifiables

Class:	Qualifiable <<abstract>>		
Explanation:	A qualifiable element may be further qualified by one or more qualifiers. Note: see Constraints for Qualifiers for constraints related to qualifiables.		
Inherits from:	—		
ID:	https://admin-shell.io/aas/3/2/Qualifiable		
Attribute	ID		
	Explanation	Type	Card.
<i>qualifier</i>	https://admin-shell.io/aas/3/2/Qualifiable/qualifier		
	Additional qualification of a qualifiable element	Qualifier	0..*

Qualifier Attributes

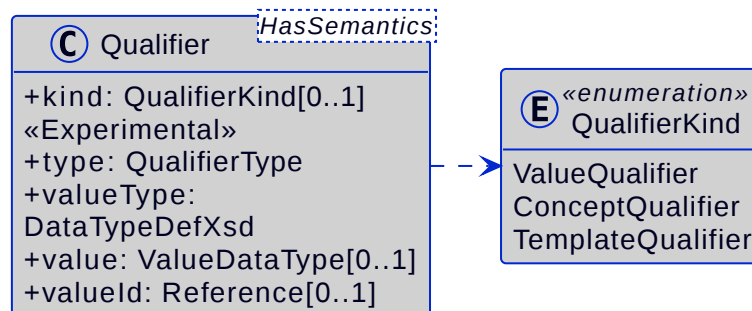


Figure 13. Metamodel of Qualifiers

Qualifiers may be defined for qualifiable elements.

There are standardized qualifiers defined in [IEC CDD, IEC61360-7, CAA002](#) and [IEC CDD, IEC 619897, ABJ604](#). A level qualifier defining the level type minimal, maximal, typical, and nominal value is specified in IEC 62569-1. In DIN SPEC 92000, qualifier types like e.g. expression semantics and expression logic are defined.

Class:	Qualifier
---------------	-----------

Explanation:	A qualifier is essentially a type-value-pair. Depending on the kind of qualifier, it makes additional statements • w.r.t. the value of the qualified element, • w.r.t the concept, i.e. semantic definition of the qualified element, • w.r.t. existence and other meta information of the qualified element type. Constraint AASd-006: If both, the <code>_value_</code> and the <code>_valueId_</code> of a Qualifier are present, the value shall be identical to the value of the referenced coded value in Qualifier/valueId. Constraint AASd-020: The value of Qualifier/value shall be consistent with the data type as defined in Qualifier/valueType.		
Inherits from:	HasSemantics		
ID:	https://admin-shell.io/aas/3/2/Qualifier		
Attribute	ID		
	Explanation	Type	Card.
<i>kind</i> <<Experimental>>	https://admin-shell.io/aas/3/2/Qualifier/kind		
	The qualifier kind describes the kind of qualifier that is applied to the element. Default: ConceptQualifier	QualifierKind	0..1
<i>type</i>	https://admin-shell.io/aas/3/2/Qualifier/type		
	The qualifier type describes the type of qualifier that is applied to the element.	QualifierType	1
<i>valueType</i>	https://admin-shell.io/aas/3/2/Qualifier/valueType		
	Data type of the qualifier <i>value</i>	DataTypeDefXsd	1
<i>value</i>	https://admin-shell.io/aas/3/2/Qualifier/value		
	The qualifier value is the value of the qualifier.	ValueDataType	0..1
<i>valueId</i>	https://admin-shell.io/aas/3/2/Qualifier/valueId		
	Reference to the global unique ID of a coded value	Reference	0..1

It is recommended to add a *semanticId* for the concept of the *Qualifier*. *Qualifier/type* is the preferred name of the concept of the qualifier or its short name.

Enumeration:	<i>QualifierKind</i>
Explanation:	Enumeration for kinds of qualifiers

Set of:	—
ID:	https://admin-shell.io/aas/3/2/QualifierKind
Literal	ID
	Explanation
<i>ValueQualifier</i>	https://admin-shell.io/aas/3/2/QualifierKind/ValueQualifier Qualifies the value of the element; the corresponding qualifier value can change over time. Value qualifiers are only applicable to elements with <i>kind</i> ="Instance".
<i>ConceptQualifier</i>	https://admin-shell.io/aas/3/2/QualifierKind/ConceptQualifier Qualifies the semantic definition (<i>HasSemantics/semanticId</i>) the element is referring to; the corresponding qualifier value is static.
<i>TemplateQualifier</i>	https://admin-shell.io/aas/3/2/QualifierKind/TemplateQualifier Qualifies the elements within a specific Submodel on concept level; the corresponding qualifier value is static. Note: template qualifiers are only applicable to elements with <i>kind</i>="Template". See constraint AASd-129.

Example of a *ValueQualifier*: property "temperature" and qualifier "value quality" with different qualifier values like "measured", "substitute value".

Example of a *ConceptQualifier*: an Asset Administration Shell with two submodels with different IDs but the same *semanticId* = "Bill of Material". The qualifier could denote the life cycle with qualifier values like "as planned", "as maintained" etc. (see [Figure 14](#)).

Example of a *TemplateQualifier*: a SubmodelElement with qualifier value "mandatory" or "optional". This qualification is needed to build a correct Submodel instance. For more information see [\[48\]](#).

Qualifier	semanticId = 0112/2///61360_4#AAF599#001
type	Life cycle qualifier
valueType	xs:string
value	BUILT
valueId	0112/2///61360_4#AAF573#001

Figure 14. Example: Qualifier from IEC CDD

Referable Attributes

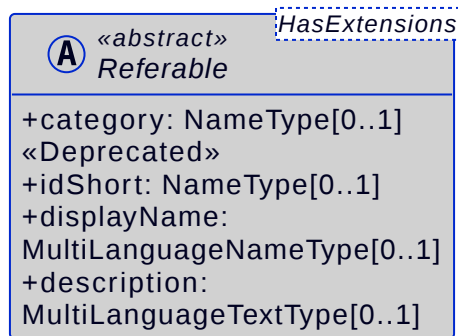


Figure 15. Metamodel of Referables

The metamodel differentiates between elements that are identifiable, referable, or none of both. The latter means they are neither inheriting from *Referable* nor from *Identifiable*, which applies e.g. to *Qualifiers*.

Referable elements can be referenced via the *idShort* (except for elements within a [SubmodelElementList](#)). For details on referencing, see [Referencing](#).

Not every element of the metamodel is referable. There are elements that are just attributes of a referable.

The *idShort* shall be unique in its name space for non-identifiable referables (exception: referables within a [SubmodelElementList](#)) (see Constraint AASd-022). A name space is defined as follows in this context: the parent element(s), which an element is part of and that is either referable or identifiable, is the name space of the element.

Example: a Submodel is the name space for the properties directly contained in it; the name space of a SubmodelElement contained in a SubmodelElement collection is the SubmodelElement collection.

Class:	<i>Referable</i> <<abstract>>		
Explanation:	Element that is referable by its idShort. This ID is not globally unique. This ID is unique within the name space of the element. Note 2: see Constraints for Referables and Identifiables for constraints related to referables. Constraint AASd-002: idShort of Referables shall consist of at least two characters and shall only feature letters, digits, hyphen ("-") and underscore ("_"); starting mandatory with a letter, and not ending with a hyphen, i.e. <code>^[a-zA-Z][a-zA-Z0-9_-]*[a-zA-Z0-9_]+\$</code>.		
Inherits from:	HasExtensions		
ID:	https://admin-shell.io/aas/3/2/Referable		
Attribute	ID		
	Explanation	Type	Card.

<i>category</i> <<Deprecated>>	https://admin-shell.io/aas/3/2/Referable/category		
	The category is a value that gives further meta information w.r.t. the class of the element. It affects the expected existence of attributes and the applicability of constraints. Note: The category is not identical to the semantic definition (<i>HasSemantics</i>) of an element. The category could e.g. denote that the element is a measurement value, whereas the semantic definition of the element would denote that it is the measured temperature.	NameType	0..1
<i>idShort</i>	https://admin-shell.io/aas/3/2/Referable/idShort		
	In case of identifiables, this attribute is a short name of the element. In case of a referable, this ID is an identifying string of the element within its name space. Note: if the element is a property and the property has a semantic definition (<i>HasSemantics/semanticId</i>) conformant to IEC61360, the <i>idShort</i> is typically identical to the short name in English, if available.	NameType	0..1
<i>displayName</i>	https://admin-shell.io/aas/3/2/Referable/displayName		
	Display name; can be provided in several languages	MultiLanguageNameType	0..1
<i>description</i>	https://admin-shell.io/aas/3/2/Referable/description		
	Description or comments on the element The description can be provided in several languages. If no description is defined, the definition of the concept description that defines the semantics of the element is used. Additional information can be provided, e.g. if the element is qualified and which qualifier types can be expected in which context or which additional data specification templates.	MultiLanguageTextType	0..1

Predefined categories are described in [Table 2](#).

Note: categories are deprecated and should no longer be used.

Table 2. Categories^[3] for Elements with Value

Category:	Applicable to, Examples:	Explanation:
<i>CONSTANT</i>	Property ReferenceElement	An element with the category <i>CONSTANT</i> is an element with a value that does not change over time. In ECLASS, this kind of category has the category "Coded Value".
<i>PARAMETER</i>	Property MultiLanguageProperty Range SubmodelElementCollection	An element with the category <i>PARAMETER</i> is an element that is once set and then typically does not change over time. This applies e.g. to configuration parameters.
<i>VARIABLE</i>	Property SubmodelElementList	An element with the category <i>VARIABLE</i> is an element that is calculated during runtime, i.e. its value is a runtime value.

Core Classes

Asset Administration Shell Attributes

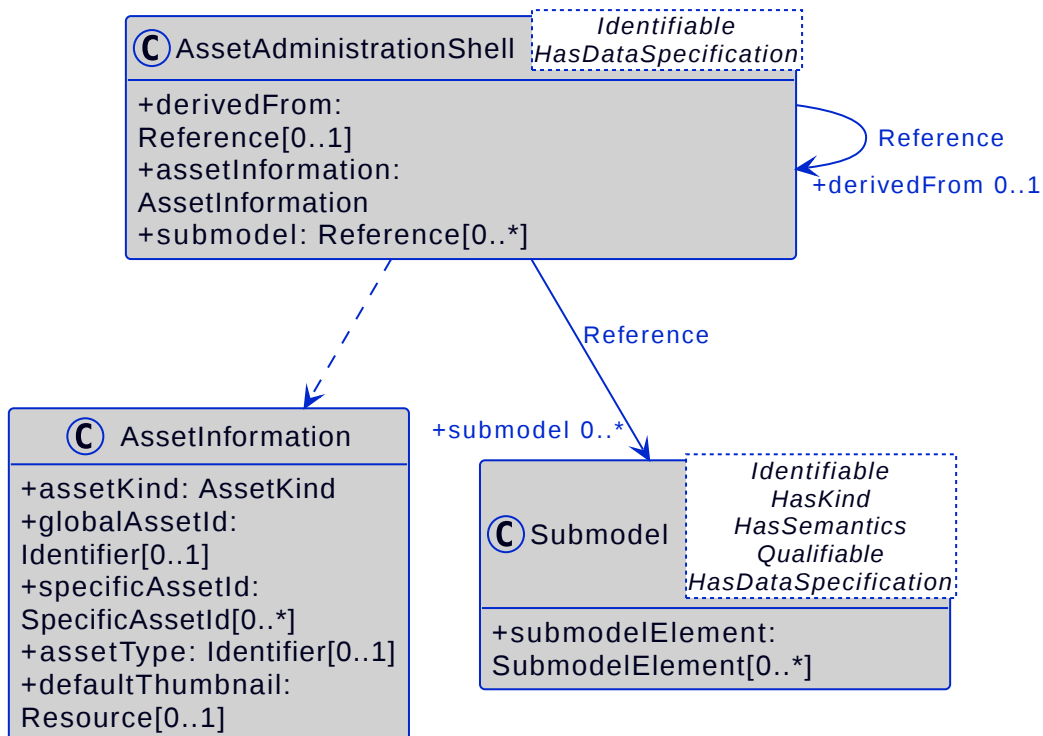


Figure 16. Metamodel of an AssetAdministrationShell

An Administration Shell is uniquely identifiable since it inherits from *Identifiable*.

The *derivedFrom* attribute is used to establish a relationship between two Asset Administration Shells that are derived from each other. For more detailed information on the *derivedFrom* concept, see [Types and Instances](#).

Class:	<i>AssetAdministrationShell</i>		
Explanation:	An Asset Administration Shell		
Inherits from:	Identifiable ; HasDataSpecification		
ID:	https://admin-shell.io/aas/3/2/AssetAdministrationShell		
Attribute	ID		
	Explanation	Type	Card.
<i>derivedFrom</i>	https://admin-shell.io/aas/3/2/AssetAdministrationShell/derivedFrom		
	The reference to the Asset Administration Shell, which the Asset Administration Shell was derived from	ModelReference< AssetAdministrationShell >	0..1
<i>assetInformation</i>	https://admin-shell.io/aas/3/2/AssetAdministrationShell/assetInformation		
	Meta information about the asset, the Asset Administration Shell is representing	AssetInformation	1
<i>submodel</i>	https://admin-shell.io/aas/3/2/AssetAdministrationShell/submodel		
	Reference to a Submodel of the Asset Administration Shell A Submodel is a description of an aspect of the asset, the Asset Administration Shell is representing. The asset of an Asset Administration Shell is typically described by one or more submodels. Temporarily, no Submodel might be assigned to the Asset Administration Shell.	ModelReference< Submodel >	0..*

Asset Information Attributes

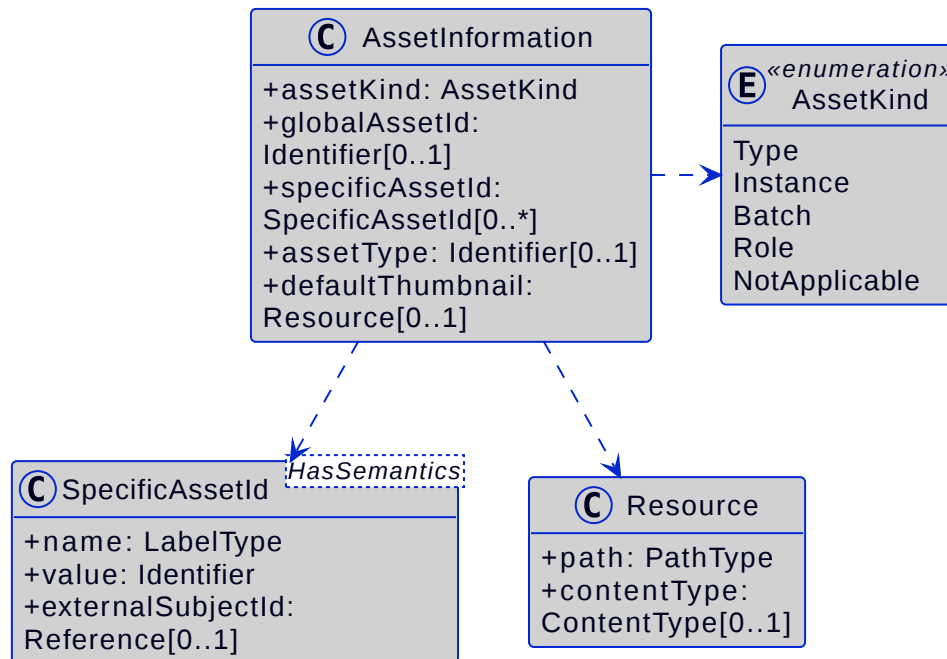


Figure 17. Metamodel of Asset Information

Class:	<i>AssetInformation</i>		
Explanation:	In <i>AssetInformation</i>, identifying metadata of the asset that is represented by an Asset Administration Shell is defined. Several asset kinds are distinguished like for example type assets and instance assets. The asset has a globally unique identifier, plus – if needed – additional domain-specific (proprietary) identifiers. However, to support the corner case of very first phase of life cycle where a stabilized/constant global asset identifier does not already exist, the corresponding attribute "globalAssetId" is optional. Constraint AASd-131: The globalAssetId or at least one specificAssetId shall be defined for AssetInformation. Note: see Constraints for Asset-Related Information for constraints related to asset information.		
Inherits from:	—		
ID:	https://admin-shell.io/aas/3/2/AssetInformation		
Attribute	ID		
	Explanation	Type	Card.

<i>assetKind</i>	https://admin-shell.io/aas/3/2/AssetInformation/assetKind		
	Denotes whether the asset is of kind "Type", Instance", "Batch", "Role" or none of these types is applicable	AssetKind	1
<i>globalAssetId</i>	https://admin-shell.io/aas/3/2/AssetInformation/globalAssetId		
	Identifier of the asset, the Asset Administration Shell is representing This attribute is required as soon as the Asset Administration Shell is exchanged via partners in the life cycle of the asset. In a first phase of the life cycle, the asset might not yet have a global asset ID but already an internal identifier. The internal identifier would be modelled via "specificAssetId".	Identifier	0..1
<i>specificAssetId</i>	https://admin-shell.io/aas/3/2/AssetInformation/specificAssetId		
	Additional domain-specific, typically proprietary identifier for the asset like serial number, manufacturer part ID, customer part IDs, etc	SpecificAssetId	0..*
<i>assetType</i>	https://admin-shell.io/aas/3/2/AssetInformation/assetType		
	In case <i>AssetInformation/assetKind</i> is not NotApplicable the <i>AssetInformation/assetType</i> is the asset ID of the type asset of the asset under consideration as identified by <i>AssetInformation/globalAssetId</i>. Note: in case <i>AssetInformation/assetKind</i> is Instance then the <i>AssetInformation/assetType</i> denotes which Type the asset is of. But it is also possible to have an <i>AssetInformation/assetType</i> of an asset of kind Type.	Identifier	0..1
<i>defaultThumbnail</i>	https://admin-shell.io/aas/3/2/AssetInformation/defaultThumbnail		
	Thumbnail of the asset represented by the Asset Administration Shell; used as default.	Resource	0..1

Note: besides this asset information, there still might be an identification Submodel with further information. Specific asset IDs mainly serve the purpose of supporting discovery of Asset Administration Shells for an asset.

Resource Attributes

Class:	<i>Resource</i>		
Explanation:	Resource represents an address to a file (a locator). The value is a URI that can represent an absolute or relative path.		
Inherits from:	—		
ID:	https://admin-shell.io/aas/3/2/Resource		
Attribute	ID		
	Explanation	Type	Card.
<i>path</i>	https://admin-shell.io/aas/3/2/Resource/path		
	Path and name of the resource (with file extension) The path can be absolute or relative.	PathType	1
<i>contentType</i>	https://admin-shell.io/aas/3/2/Resource/contentType		
	Content type of the content of the file A single content type (MIME type) can have multiple file extensions associated with it.	ContentType	0..1

Asset Kind Attributes

Enumeration:	<i>AssetKind</i>		
Explanation:	Enumeration for denoting whether an asset is a type asset or an instance asset or a batch asset or is a role or whether this kind of classification is not applicable		
Set of:	—		
ID:	https://admin-shell.io/aas/3/2/AssetKind		
Literal	ID		
	Explanation		
<i>Type</i>	https://admin-shell.io/aas/3/2/AssetKind/Type		
	Type asset		
<i>Instance</i>	https://admin-shell.io/aas/3/2/AssetKind/Instance		
	Instance asset		
<i>Batch</i>	https://admin-shell.io/aas/3/2/AssetKind/Batch		
	batch asset		

Role	https://admin-shell.io/aas/3/2/AssetKind/Role
	Role asset
NotApplicable	https://admin-shell.io/aas/3/2/AssetKind/NotApplicable
	None of the other asset kinds

For more information on types and instances, see [Types and Instances](#).

Specific Asset ID Attributes

Class:	SpecificAssetId		
Explanation:	A specific asset ID describes a generic supplementary identifying attribute of the asset. The specific asset ID is not necessarily globally unique. Constraint AASd-133: SpecificAssetId/externalSubjectId shall be a global reference, i.e. Reference/type = ExternalReference.		
Inherits from:	HasSemantics		
ID:	https://admin-shell.io/aas/3/2/SpecificAssetId		
Attribute	ID		
	Explanation	Type	Card.
name	https://admin-shell.io/aas/3/2/SpecificAssetId/name		
	Name of the asset identifier	LabelType	1
value	https://admin-shell.io/aas/3/2/SpecificAssetId/value		
	The value of the specific asset identifier with the corresponding name	Identifier	1
externalSubjectId	https://admin-shell.io/aas/3/2/SpecificAssetId/externalSubjectId		
	The unique ID of the (external) subject the specific asset ID <i>value</i> belongs to or has meaning to Note: this is an external reference.	Reference	0..1

Note 1: names for specificAssetIds do not need to be unique.

Note 2: semanticIds for the single specificAssetIds do not need to be unique.

For more information on the concept of subject, see Attribute Based Access Control (ABAC) [\[49\]](#). The assumption is that every subject has a unique identifier.

Submodel Attributes

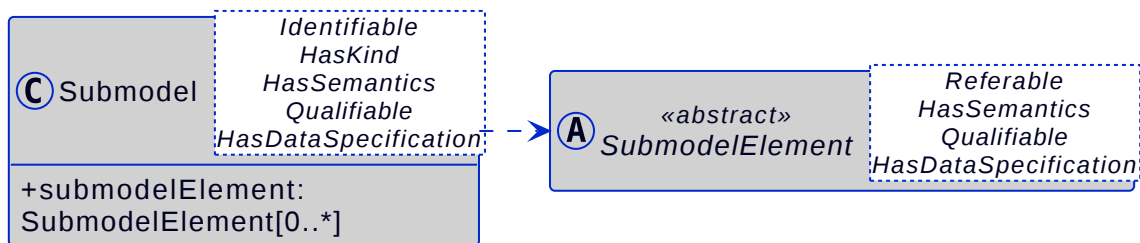


Figure 18. Metamodel of Submodel

Adding a *semanticId* for a Submodel is recommended (see [Table "Elements with Allowed Identifying Values"](#)).

If the Submodel is of *kind=Template* (modelling kind as inherited by *HasKind*), the SubmodelElements within the Submodel are presenting SubmodelElement templates. If the Submodel is of *kind=Instance*, its SubmodelElements represent SubmodelElement instances.

Note: validators shall handle a Submodel like *SubmodelElementCollection/submodelElements* and not like a *SubmodelElementList/value*. The difference is that a Submodel is identifiable and a predefined unit of information within the Asset Administration Shell.

Class:	<i>Submodel</i>		
Explanation:	A Submodel defines a specific aspect of the asset represented by the Asset Administration Shell. A Submodel is used to structure the digital representation and technical functionality of an Administration Shell into distinguishable parts. Each Submodel refers to a well-defined domain or subject. Submodels can become standardized and, in turn, Submodel templates.		
Inherits from:	Identifiable ; HasKind ; HasSemantics ; Qualifiable ; HasDataSpecification		
ID:	https://admin-shell.io/aas/3/2/Submodel		
Attribute	ID		
	Explanation	Type	Card.
<i>submodelElement</i>	https://admin-shell.io/aas/3/2/Submodel/submodelElement		
	SubmodelElement contained in the Submodel	SubmodelElement	0..*

SubmodelElement Attributes



Figure 19. Metamodel of SubmodelElement

SubmodelElements are qualifiable elements, i.e. one or more qualifiers may be defined for each of them.

It is recommended to add a [HasSemantics/semanticId](#) to a *SubmodelElement*.

SubmodelElements may also have defined data specification templates. A template might be defined to mirror some of the attributes like *preferredName* and *unit* of a property concept definition if there is no corresponding concept description available. Otherwise, there is only the property definition referenced by [HasSemantics/semanticId](#) available for the property; the attributes must be looked up online in a different way and are not available offline.

Class:	<i>SubmodelElement</i> <<abstract>>		
Explanation:	A SubmodelElement is an element suitable for the description and differentiation of assets.		
Inherits from:	Referable ; HasSemantics ; Qualifiable ; HasDataSpecification		
ID:	https://admin-shell.io/aas/3/2/SubmodelElement		
Attribute	ID		
	Explanation	Type	Card.

Submodel Element Types

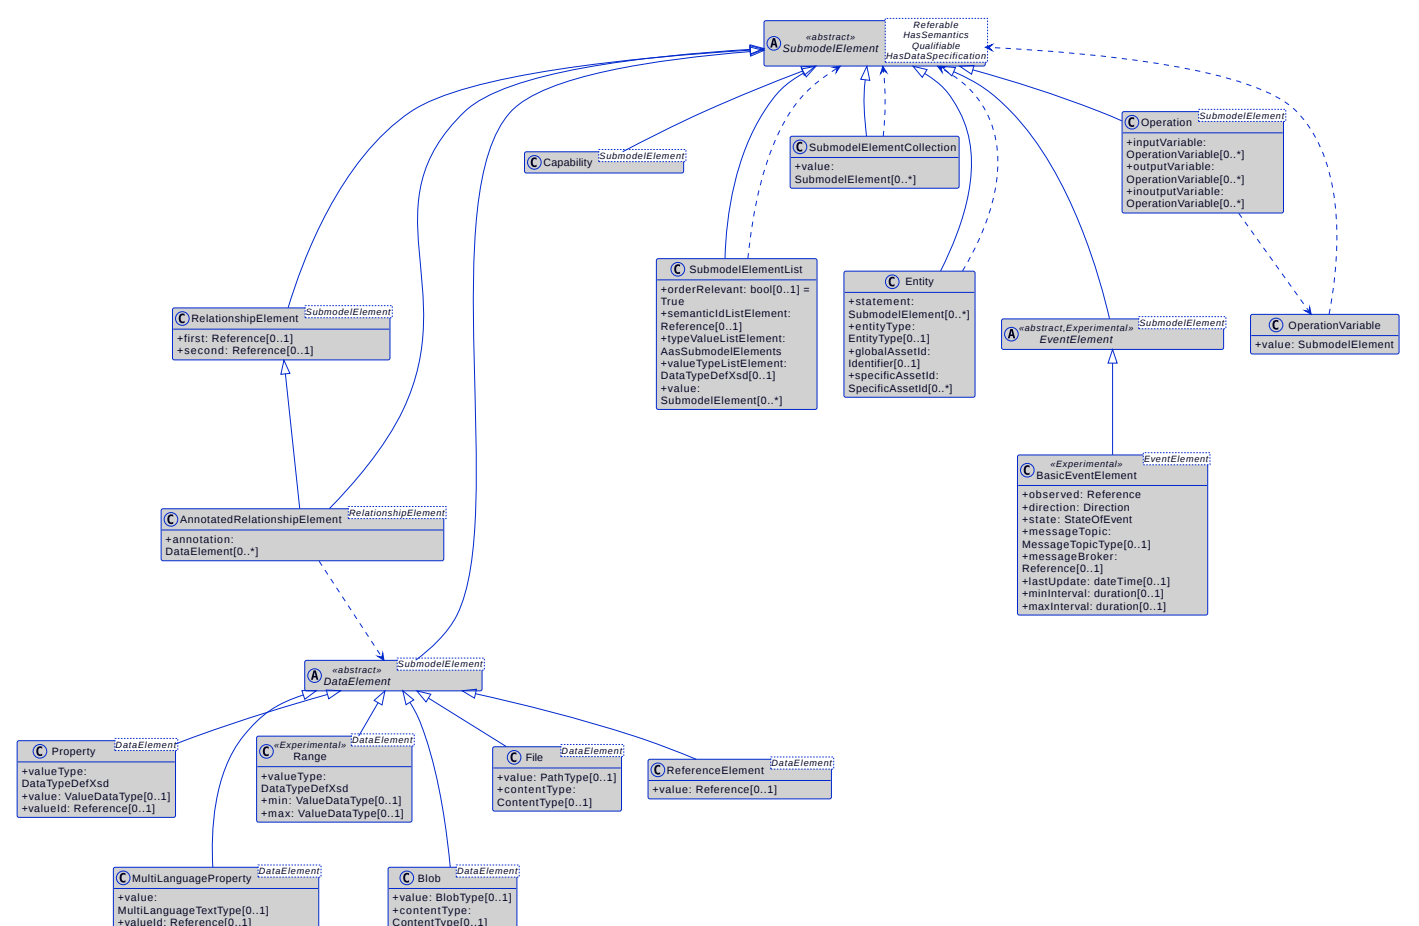


Figure 20. Metamodel Overview for SubmodelElement Subtypes

SubmodelElements include data properties as well as operations, events and other elements needed to describe a model for an asset (see [Figure 20](#)).

General

All SubmodelElements including abstract classes like data elements are specified in alphabetical order.

Note: value-related attributes typically are optional to enable definition of Submodel Templates as well, i.e. [Submodels](#) with value of [Submodel/kind](#) equal to [Template](#).

Annotated Relationship Element Attributes

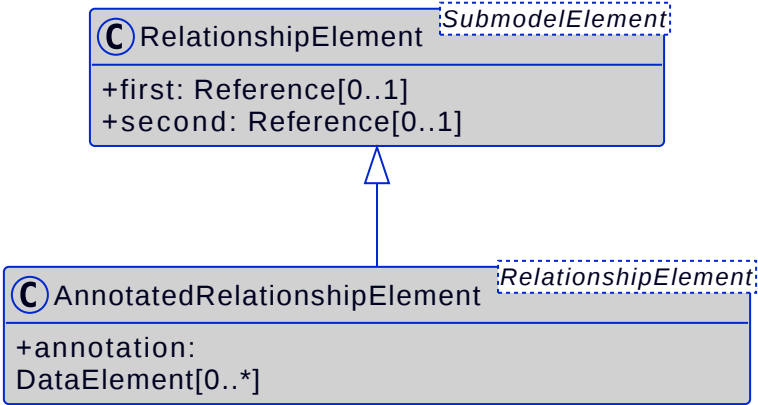


Figure 21. Metamodel of Annotated Relationship Elements

An annotated relationship is a relationship similar to a ternary association in UML. The semantics of the relationship is defined via the *semanticId* of the *RelationshipElement*. If this semantic definition requires additional information not contained in the *first* or *second* object referenced via the relationship, this information needs to be stored as annotation.

Class:	AnnotatedRelationshipElement		
Explanation:	An annotated relationship element is a relationship element that can be annotated with additional data elements.		
Inherits from:	RelationshipElement		
ID:	https://admin-shell.io/aas/3/2/AnnotatedRelationshipElement		
Attribute	ID		
	Explanation	Type	Card.
annotation	https://admin-shell.io/aas/3/2/AnnotatedRelationshipElement/annotation		
	A data element that represents an annotation that holds for the relationship between the two elements	DataElement	0..*

Basic Event Element Attributes

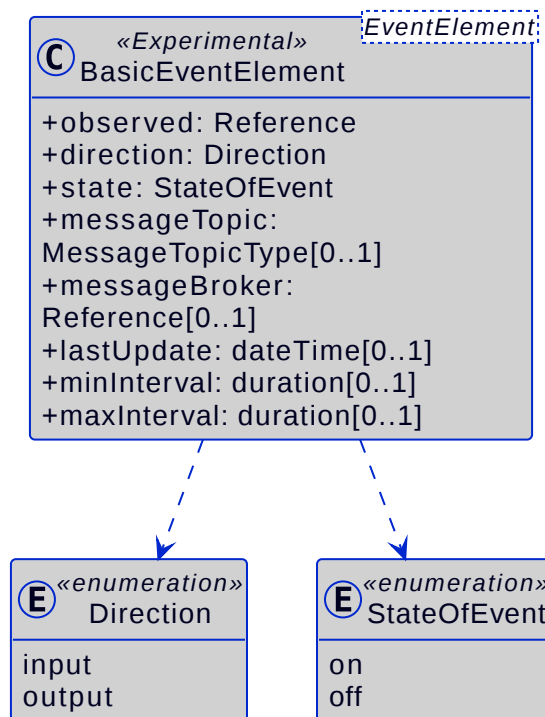


Figure 22. Metamodel of Basic Event Element

Class:	BasicEventElement <<Experimental>>		
Explanation:	A basic event element		
Inherits from:	EventElement		
ID:	https://admin-shell.io/aas/3/2/BasicEventElement		
Attribute	ID		
	Explanation	Type	Card.
<i>observed</i>	https://admin-shell.io/aas/3/2/BasicEventElement		
	Reference to a referable, e.g. a data element or a Submodel that is being observed	ModelReference< Referabl e >	1
<i>direction</i>	https://admin-shell.io/aas/3/2/BasicEventElement/direction		
	Direction of event Can be { input, output }	Direction	1
<i>state</i>	https://admin-shell.io/aas/3/2/BasicEventElement/state		
	State of event Can be { on, off }	StateOfEvent	1

<i>messageTopic</i>	https://admin-shell.io/aas/3/2/BasicEventElement/messageTopic		
	Information for the outer message infrastructure to schedule the event for the respective communication channel.	MessageTopicType	0..1
<i>messageBroker</i>	https://admin-shell.io/aas/3/2/BasicEventElement/messageBroker		
	Information about which outer message infrastructure shall handle messages for the <i>EventElement</i>; refers to a Submodel, SubmodelElementList, SubmodelElementCollection or Entity, which contains DataElements describing the proprietary specification for the message broker Note: this proprietary specification could be standardized by using respective submodels for different message infrastructure, e.g. OPC UA, MQTT or AMQP.	ModelReference< Referable >	0..1
<i>lastUpdate</i>	https://admin-shell.io/aas/3/2/BasicEventElement/lastUpdate		
	Timestamp in UTC, when the last event was received (input direction) or sent (output direction)	DateTimeUtc	0..1
<i>minInterval</i>	https://admin-shell.io/aas/3/2/BasicEventElement/minInterval		
	For input direction reports on the maximum frequency, the software entity behind the respective referable can handle input events. For output events, the maximum frequency of outputting this event to an outer infrastructure is specified. Might be not specified, i.e. if there is no minimum interval.	duration	0..1
<i>maxInterval</i>	https://admin-shell.io/aas/3/2/BasicEventElement/maxInterval		
	Not applicable for input direction For output direction: maximum interval in time, the respective referable shall send an update of the status of the event, even if no other trigger condition for the event was not met. Might not be specified, i.e. if there is no maximum interval.	duration	0..1

Direction Enumeration

Enumeration:	<i>Direction</i> <<Experimental>>
Explanation:	Direction
Set of:	—
ID:	https://admin-shell.io/aas/3/2/Direction
Literal	ID
	Explanation
<i>input</i>	https://admin-shell.io/aas/3/2/Direction/input
	Input direction
<i>output</i>	https://admin-shell.io/aas/3/2/Direction/output
	Output direction

State of Event Enumeration

Enumeration:	<i>StateOfEvent</i> <<Experimental>>
Explanation:	State of an event
Set of:	—
ID:	https://admin-shell.io/aas/3/2/StateOfEvent
Literal	ID
	Explanation
<i>on</i>	https://admin-shell.io/aas/3/2/StateOfEvent/on
	Event is on
<i>off</i>	https://admin-shell.io/aas/3/2/StateOfEvent/off
	Event is off

Events sent or received by an Asset Administration Shell always comply with a general format. Exception: events exchanged in the course of an Industry 4.0 interaction pattern.

Event Payload Attributes

The payload of such an event is specified below.

Note: the payload is not part of the information model as exchanged via the AASX package format but used in re-active Asset Administration Shells.

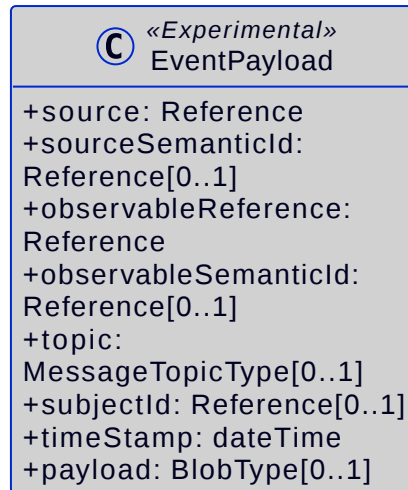


Figure 23. Metamodel of Event Payload

Class:	<i>EventPayload</i> <<Experimental>>		
Explanation:	Defines the necessary information of an event instance sent out or received		
Inherits from:	-		
ID:	https://admin-shell.io/aas/3/2/EventPayload		
Attribute	ID		
	Explanation	Type	Card.
<i>source</i>	https://admin-shell.io/aas/3/2/EventPayload/source		
	Reference to the source event element	ModelReference< EventElement >	1
<i>sourceSemanticId</i>	https://admin-shell.io/aas/3/2/EventPayload/sourceSemanticId		
	semanticId of the source event element, if available Note: it is recommended to use an external reference.	Reference	0..1
<i>observableReference</i>	https://admin-shell.io/aas/3/2/EventPayload/observableReference		
	Reference to the referable, which defines the scope of the event.	ModelReference< Referable >	1

<i>observableSemanticId</i>	https://admin-shell.io/aas/3/2/EventPayload/observableSemanticId		
	semanticId of the referable, which defines the scope of the event, if available. Note: it is recommended to use an external reference.	Reference	0..1
<i>topic</i>	https://admin-shell.io/aas/3/2/EventPayload/topic		
	Information for the outer message infrastructure to schedule the event for the respective communication channel	MessageTopicType	0..1
<i>subjectId</i>	https://admin-shell.io/aas/3/2/EventPayload/subjectId		
	Subject, who/which initiated the creation Note: this is an external reference.	Reference	0..1
<i>timestamp</i>	https://admin-shell.io/aas/3/2/EventPayload/timestamp		
	Timestamp in UTC, when this event was triggered	DateTimeUtc	1
<i>payload</i>	https://admin-shell.io/aas/3/2/EventPayload/payload		
	Event-specific payload	BlobType	0..1

For more information on the concept of subject, see Attribute Based Access Control (ABAC) [\[49\]](#). The assumption is that every subject has a unique identifier.

Blob Attributes




Figure 24. Metamodel of Blobs

For information on content type, see [File Attributes](#).

Class:	<i>Blob</i>
Explanation:	A Blob is a data element representing a file that is contained in the value attribute with its source code.
Inherits from:	DataElement
ID:	https://admin-shell.io/aas/3/2/Blob

Attribute	ID		
	Explanation	Type	Card.
value	https://admin-shell.io/aas/3/2/Blob/value		
	The value of the blob instance of a blob data element Note: in contrast to the file property, the file content is stored directly as value in the Blob data element.	BlobType	0..1
contentType	https://admin-shell.io/aas/3/2/Blob/contentType		
	Content type of the content of the blob. The content type (MIME type) states which file extensions the file can have. Valid values are content types like "application/json", "application/xls", "image/jpg". The allowed values are defined as in RFC2046.	ContentType	0..1

Capability Attributes




Figure 25. Metamodel of Capabilities

Note: the *semanticId* of a capability is typically an ontology, which enables reasoning on capabilities. For information and examples on how to apply the concept of capability and how to map it to one or more skills implementing the capability, please refer to [27]. The mapping is done via a relationship element with the corresponding semantics. A skill is typically a property or an operation. In more complex cases, the mapping can also be a collection or a complete submodel.

Class:	Capability		
Explanation:	A capability is the implementation-independent description of the potential of an asset to achieve a certain effect in the physical or virtual world.		
Inherits from:	SubmodelElement		
ID:	https://admin-shell.io/aas/3/2/Capability		
Attribute	ID		
	Explanation	Type	Card.

Data Element and Overview of Data Element Types

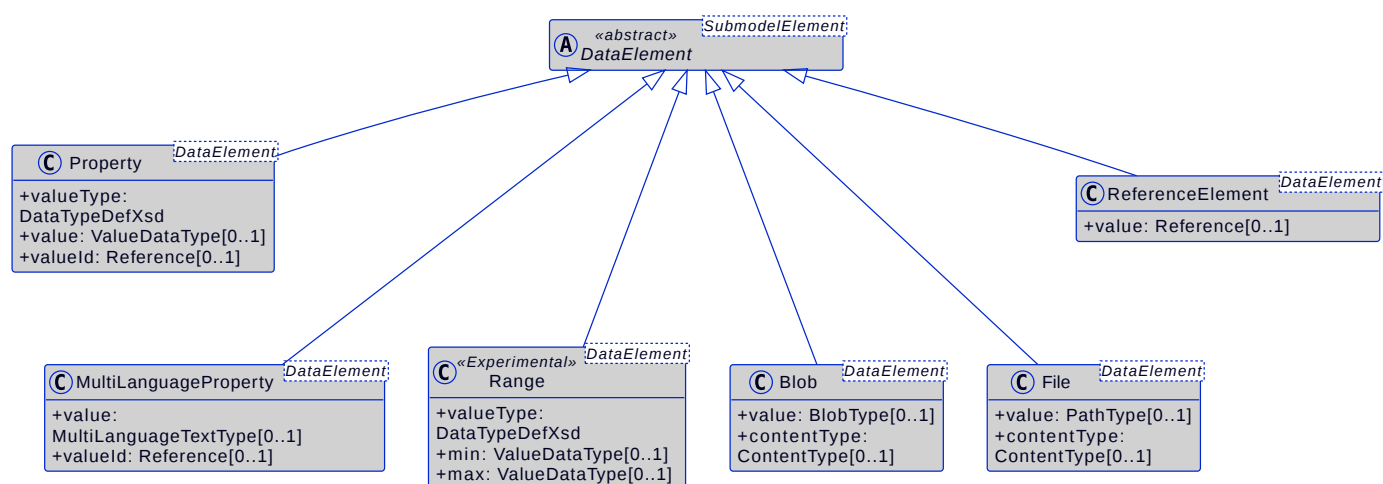


Figure 26. Metamodel of Data Elements

A data element is a SubmodelElement that is not further composed of other SubmodelElements.

A data element is a SubmodelElement that has a value or a predefined number of values like range data elements.

The type of value differs for different subtypes of data elements. Data elements include properties, file handling, and reference elements, see [Figure 26](#).

Class:	<i>DataElement</i> <<abstract>>		
Explanation:	A data element is a SubmodelElement that is not further composed of other SubmodelElements. A data element is a SubmodelElement that has a value. The type of value differs for different subtypes of data elements. {aasd090} Note: categories are deprecated and should no longer be used.		
Inherits from:	SubmodelElement		
ID:	https://admin-shell.io/aas/3/2/DataElement		
Attribute	ID		
	Explanation	Type	Card.

Entity Attributes

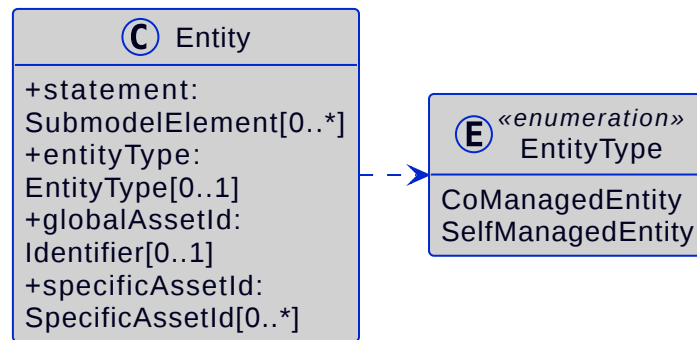


Figure 27. Metamodel of Entities

The entity SubmodelElement is designed to be used in submodels defining the relationship between the parts of the composite asset it is composed of (e.g. bill of material). These parts are called entities. Not all entities have a global asset ID.

Class:	<i>Entity</i>		
Explanation:	An entity is a SubmodelElement that is used to model entities. Constraint AASd-014: Either the attribute globalAssetId or specificAssetId of an <code>_Entity_</code> must be set if Entity/entityType is set to "SelfManagedEntity".		
Inherits from:			
ID:	https://admin-shell.io/aas/3/2/Entity		
Attribute	ID		
	Explanation	Type	Card.
<i>statement</i>	https://admin-shell.io/aas/3/2/Entity/statement		
	Statement applicable to the entity, each statement described by SubmodelElement - typically with a qualified value	SubmodelElement	0..*
<i>entityType</i>	https://admin-shell.io/aas/3/2/Entity/entityType		
	Describes whether the entity is a co-managed entity or a self-managed entity	EntityType	0..1
<i>globalAssetId</i>	https://admin-shell.io/aas/3/2/Entity/globalAssetId		
	Global identifier of the asset the entity is representing	Identifier	0..1
<i>specificAssetId</i>	https://admin-shell.io/aas/3/2/Entity/specificAssetId		
	Reference to a specific asset ID representing a supplementary identifier of the asset represented by the Asset Administration Shell	SpecificAssetId	0..*

Entity Type Enumeration

Enumeration:	<i>EntityType</i>		
Explanation:	Enumeration for denoting whether an entity is a self-managed entity or a co-managed entity		
Set of:	—		
ID:	https://admin-shell.io/aas/3/2/EntityType		
Literal	ID		
	Explanation		
<i>CoManagedEntity</i>	https://admin-shell.io/aas/3/2/EntityType/CoManagedEntity		
	There is no separate Asset Administration Shell for co-managed entities. Co-managed entities need to be part of a self-managed entity.		
<i>SelfManagedEntity</i>	https://admin-shell.io/aas/3/2/EntityType/SelfManagedEntity		
	Self-managed entities have their own Asset Administration Shell but can be part of another composite self-managed entity. The asset represented by an Asset Administration Shell is a self-managed entity per definition.		

Event Element Attributes




Figure 28. Metamodel of Event Elements

Class:	<i>EventElement</i> <<abstract>> <<Experimental>>		
Explanation:	An event element		
Inherits from:	SubmodelElement		
ID:	https://admin-shell.io/aas/3/2/EventElement		
Attribute	ID		
	Explanation	Type	Card.

File Attributes




Figure 29. Metamodel of File SubmodelElement

A media type (also MIME type and content type) is a two-part identifier for file formats and format contents transmitted via the Internet. The Internet Assigned Numbers Authority (IANA) is the official authority for the standardization and publication of these classifications.

Note: for information on handling supplementary external files in exchanging Asset Administration Shells in AASX package format see also Part 5 of the series ["Specification of the Asset Administration Shell"](#). An absolute path is used in case the file exists independently of the Asset Administration Shell. A relative path, relative to the package root, should be used if the file is part of a serialized package of the Asset Administration Shell.

Class:	File		
Explanation:	A file is a data element that represents an address to a file (a locator). The value is a URI that can represent an absolute or relative path.		
Inherits from:	DataElement		
ID:	https://admin-shell.io/aas/3/2/File		
Attribute	ID		
	Explanation	Type	Card.
value	https://admin-shell.io/aas/3/2/File/value		
	Path and name of the file (with file extension)	PathType	0..1
	The path can be absolute or relative.		
contentType	https://admin-shell.io/aas/3/2/File/contentType		
	Content type of the content of the file	ContentType	0..1

Multi Language Property Attributes

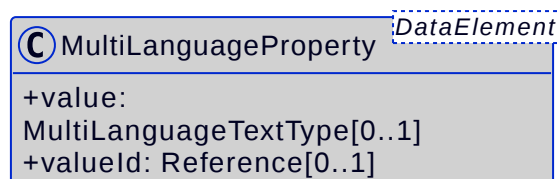


Figure 30. Metamodel of Multi Language Properties

Class:	<i>MultiLanguageProperty</i>		
Explanation:	A property is a data element that has a multi-language value. Constraint AASd-012: If both the MultiLanguageProperty/value and the MultiLanguageProperty/valueId are present, the meaning must be the same for each string in a specific language, as specified in MultiLanguageProperty/valueId.		
Inherits from:	DataElement		
ID:	https://admin-shell.io/aas/3/2/MultiLanguageProperty		
Attribute	ID		
	Explanation	Type	Card.
<i>value</i>	https://admin-shell.io/aas/3/2/MultiLanguageProperty/value		
	The value of the property instance	MultiLanguageTextType	0..1
<i>valueId</i>	https://admin-shell.io/aas/3/2/MultiLanguageProperty/valueId		
	Reference to the global unique ID of a coded value.	Reference	0..1

Operation Attributes

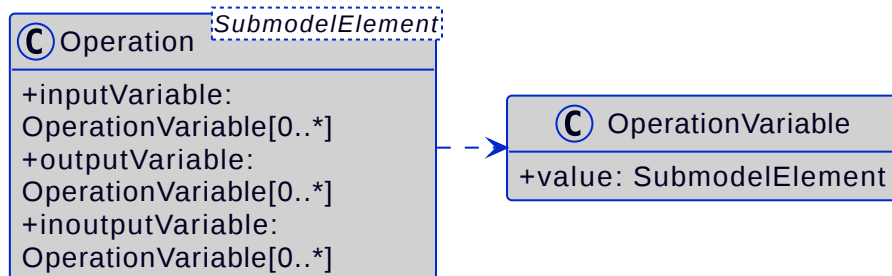


Figure 31. Metamodel of Operations

Class:	<i>Operation</i>		
Explanation:	An operation is a SubmodelElement with input and output variables. Constraint AASd-134: For an Operation, the idShort of all inputVariable/value, outputVariable/value, and inoutputVariable/value shall be unique.		
Inherits from:	SubmodelElement		
ID:	https://admin-shell.io/aas/3/2/Operation		
Attribute	ID		
	Explanation	Type	Card.

<i>inputVariable</i>	https://admin-shell.io/aas/3/2/Operation/inputVariable		
	Input parameter of the operation	OperationVariable	0..*
<i>outputVariable</i>	https://admin-shell.io/aas/3/2/Operation/outputVariable		
	Output parameter of the operation	OperationVariable	0..*
<i>inoutputVariable</i>	https://admin-shell.io/aas/3/2/Operation/inoutputVariable		
	Parameter that is input and output of the operation	OperationVariable	0..*

Note: In embedded systems *inoutputVariables* are variables that can be read but that are also written by the system. Typically, this is implemented via a pointer (i.e. 'by reference' instead of 'by value').

Operation Variable Attributes

Class:	<i>OperationVariable</i>		
Explanation:	The value of an operation variable is a SubmodelElement that is used as input and/or output variable of an operation.		
Inherits from:	—		
ID:	https://admin-shell.io/aas/3/2/OperationVariable		
Attribute	ID		
	Explanation	Type	Card.
<i>value</i>	https://admin-shell.io/aas/3/2/OperationVariable/value		
	Describes an argument or result of an operation via a SubmodelElement	SubmodelElement	1

Specification of operations in Submodel with [kind=Instance](#) are handled identical to operations in Submodel Templates (Submodel with [kind=Template](#))

Note 1: an operation can be invoked via an API call (*InvokeOperationSync* and *InvokeOperationAsync*). For further explanation see Part 2 (IDTA-01002).

Note 2: *OperationVariable* is introduced as separate class to enable future extensions, e.g. for adding a default value or cardinality (optional/mandatory).

Property Attributes

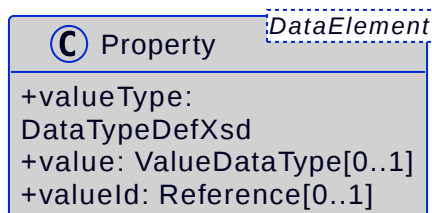


Figure 32. Metamodel of Properties

Class:	<i>Property</i>		
Explanation:	A property is a data element that has a single value. Constraint AASd-007: If both the Property/value and the Property/valueId are present, the value of Property/value shall be identical to the value of the referenced coded value in Property/valueId.		
Inherits from:	DataElement		
ID:	https://admin-shell.io/aas/3/2/Property		
Attribute	ID		
	Explanation	Type	Card.
<i>valueType</i>	https://admin-shell.io/aas/3/2/Property/valueType		
	Data type of the value attribute	DataTypeDefXsd	1
<i>value</i>	https://admin-shell.io/aas/3/2/Property/value		
	The value of the property instance	ValueDataType	0..1
<i>valueId</i>	https://admin-shell.io/aas/3/2/Property/valueId		
	Reference to the global unique ID of a coded value	Reference	0..1

Range Attributes

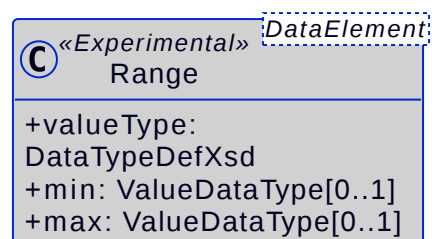


Figure 33. Metamodel of Ranges

Class:	<i>Range <<Experimental>></i>
Explanation:	A range data element is a data element that defines a range with min and max.

Inherits from:	DataElement		
ID:	https://admin-shell.io/aas/3/2/Range		
Attribute	ID		
	Explanation	Type	Card.
<i>valueType</i>	https://admin-shell.io/aas/3/2/Range/valueType		
	Data type of the min und max attributes	DataTypeDefXsd	1
<i>min</i>	https://admin-shell.io/aas/3/2/Range/min		
	The minimum value of the range	ValueDataType	0..1
<i>max</i>	https://admin-shell.io/aas/3/2/Range/max		
	The maximum value of the range	ValueDataType	0..1

Reference Element Attributes




Figure 34. Metamodel of Reference Elements

Class:	<i>ReferenceElement</i>		
Explanation:	A reference element is a data element that defines a logical reference to another element within the same or another Asset Administration Shell or a reference to an external object or entity.		
Inherits from:	DataElement		
ID:	https://admin-shell.io/aas/3/2/ReferenceElement		
Attribute	ID		
	Explanation	Type	Card.
<i>value</i>	https://admin-shell.io/aas/3/2/ReferenceElement/value		
	External reference to an external object or entity or a logical reference to another element within the same or another Asset Administration Shell (i.e. a model reference to a <i>Referable</i>)	Reference	0..1

For more information on references, see [Referencing](#).

Relationship Element Attributes

The semantics of the relationship is defined via the *semanticId* of the *RelationshipElement*. If this semantic definition requires additional information not contained in the *first* or *second* object referenced via the relationship, the SubmodelElement type [AnnotatedRelationshipElement](#) shall be used instead.




Figure 35. Metamodel of Relationship Elements

Class:	<i>RelationshipElement</i>		
Explanation:	A relationship element is used to define a relationship between two elements being either referable (model reference) or external (external reference).		
Inherits from:	SubmodelElement		
ID:	https://admin-shell.io/aas/3/2/RelationshipElement		
Attribute	ID		
	Explanation	Type	Card.
<i>first</i>	https://admin-shell.io/aas/3/2/RelationshipElement/first		
	Reference to the first element in the relationship taking the role of the subject	Reference	0..1
<i>second</i>	https://admin-shell.io/aas/3/2/RelationshipElement/second		
	Reference to the second element in the relationship taking the role of the object	Reference	0..1

SubmodelElement Collection Attributes

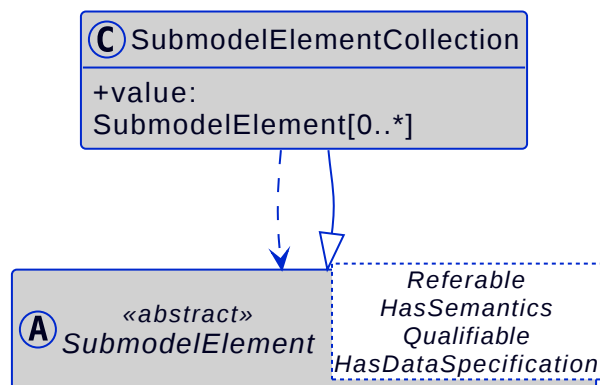


Figure 36. Metamodel of SubmodelElement Collections

SubmodelElement Collections are used for complex elements with a typically fixed set of properties with unique names. This set of properties is typically predefined by the semantic definition (referenced via [semanticId](#)) of the SubmodelElement collection. Each property within the collection itself should have clearly defined semantics.

Note: the different elements of a SubmodelElement collection do not have to have different [semanticIds](#). However, in these cases the usage of a [SubmodelElementList](#) should be considered.

Example: a single document has a predefined set of properties like title, version, author, etc. They logically belong to a document. So a single document is represented by a *SubmodelElementCollection*. An asset usually has many different documents available like operating instructions, safety instructions, etc. The set of all documents is represented by a [SubmodelElementList](#). In this case, we have a [SubmodelElementList](#) of [SubmodelElementCollections](#).

Note: the elements within a SubmodelElement collection are not ordered. Every element has a unique ID (its "idShort"). However, it is recommended to adhere to the order defined in the Submodel template.

Class:	<i>SubmodelElementCollection</i>		
Explanation:	A SubmodelElement collection is a kind of struct, i.e. a logical encapsulation of multiple named values.		
Inherits from:			
ID:	https://admin-shell.io/aas/3/2/SubmodelElementCollection		
Attribute	ID		
	Explanation	Type	Card.
<i>value</i>	https://admin-shell.io/aas/3/2/SubmodelElementCollection/value		
	SubmodelElement contained in the collection	SubmodelElement	0..*

SubmodelElement List Attributes

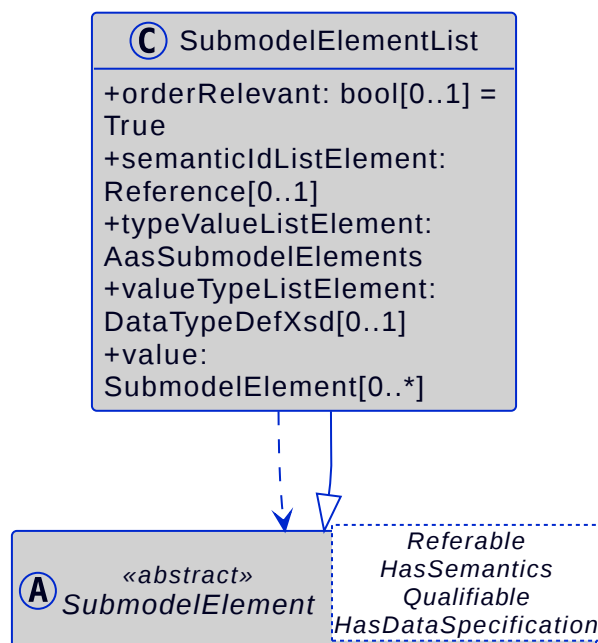


Figure 37. Metamodel of SubmodelElement Lists

SubmodelElement lists are used for sets (i.e. unordered collections without duplicates), ordered lists (i.e. ordered collections that may contain duplicates), bags (i.e. unordered collections that may contain duplicates), and ordered sets (i.e. ordered collections without duplicates).

SubmodelElement lists are also used to create multidimensional arrays. A two-dimensional array *list[3][5]* with *Property* values would be realized like follows: the first SubmodelElement list would contain three [SubmodelElementList](#) elements. Each of these three [SubmodelElementList](#) would contain 5 single [Property](#) elements. The [semanticId](#) of the contained properties would be the same for all lists in the first list, i.e. [semanticIdListElement](#) would be identical for all three lists contained in the first list. The *semanticId* of the three contained lists would differ depending on the dimension it represents. In case of complex values in the array, a [SubmodelElementCollection](#) would be used as values in the leaf lists.

Similarly, a table with three columns can be represented. In this case a *SubmodelElementCollection* with three [SubmodelElementLists](#) would be contained and the [semanticId](#) as well as the [semanticIdListElement](#) for the three columns would differ.

Matching strategies for semantic IDs are explained in [Matching Strategies for Semantic Identifiers](#).

Class:	<i>SubmodelElementList</i>
Explanation:	A SubmodelElement list is an ordered list of SubmodelElements. Note: the list is ordered although the ordering might not be relevant (see attribute "orderRelevant".) The numbering starts with Zero (0). Constraint AASd-107: If a first level child element in a SubmodelElementList has a semanticId, it shall be identical to SubmodelElementList/semanticIdListElement. Constraint AASd-114: If two first level child elements in a SubmodelElementList have a semanticId, they shall be identical. Constraint AASd-115: If a first level child element in a SubmodelElementList does not specify a semanticId, the value is assumed to be identical to SubmodelElementList/semanticIdListElement. Constraint AASd-108: All first level child elements in a SubmodelElementList shall have the same SubmodelElement type as specified in SubmodelElementList/typeValueListElement. Constraint AASd-109: If <code>_SubmodelElementList/typeValueListElement_</code> is equal to AasSubmodelElements/Property or AasSubmodelElements/Range, SubmodelElementList/valueTypeListElement shall be set and all first level child elements in the SubmodelElementList shall have the value type as specified in SubmodelElementList/valueTypeListElement. Constraint AASd-138: A SubmodelElementList within a Submodel of <code>kind=Template</code> or as part of an OperationVariable shall have exactly one element.
Inherits from:	
ID:	https://admin-shell.io/aas/3/2/SubmodelElementList

Attribute	ID		
	Explanation	Type	Card.
<i>orderRelevant</i>	https://admin-shell.io/aas/3/2/SubmodelElementList/orderRelevant		
	Defines whether order in list is relevant. If <i>orderRelevant</i> = false, the list represents a set or a bag. Default: True	boolean	0..1
<i>value</i>	https://admin-shell.io/aas/3/2/SubmodelElementList/value		
	SubmodelElement contained in the list	SubmodelElement	0..*
<i>semanticIdListElement</i>	https://admin-shell.io/aas/3/2/SubmodelElementList/semanticIdListElement		
	Semantic ID which the SubmodelElements contained in the list match	Reference	0..1
<i>typeValueListElement</i>	https://admin-shell.io/aas/3/2/SubmodelElementList/typeValueListElement/typeValueListElement		
	The SubmodelElement type of the SubmodelElements contained in the list	AasSubmodelElements	1
<i>valueTypeListElement</i>	https://admin-shell.io/aas/3/2/SubmodelElementList/valueTypeListElement		
	The value type of the SubmodelElement contained in the list	DataTypeDefXsd	0..1

AasSubmodelElements Enumeration

E «enumeration» AasSubmodelElements
AnnotatedRelationshipElement BasicEventElement Blob Capability DataElement Entity EventElement File MultiLanguageProperty Operation Property Range ReferenceElement RelationshipElement SubmodelElement SubmodelElementList SubmodelElementCollection

Figure 38. Logical Enumeration AasSubmodelElements

Enumeration:	<i>AasSubmodelElements</i>
Explanation:	Enumeration of SubmodelElement types including abstract SubmodelElement types
Set of:	AasContainerSubmodelElements , AasNonContainerSubmodelElements
ID:	https://admin-shell.io/aas/3/2/AasSubmodelElements
Literal	ID
	Explanation
<i>AnnotatedRelationshipElement</i>	https://admin-shell.io/aas/3/2/AasSubmodelElements/AnnotatedRelationshipElement
	Annotated relationship element
<i>BasicEventElement</i>	https://admin-shell.io/aas/3/2/AasSubmodelElements/BasicEventElement
	Basic event element
<i>Blob</i>	https://admin-shell.io/aas/3/2/AasSubmodelElements/Blob
	Blob
<i>Capability</i>	https://admin-shell.io/aas/3/2/AasSubmodelElements/Capability
	Capability
<i>DataElement</i>	https://admin-shell.io/aas/3/2/AasSubmodelElements/DataElement
	Data Element
	Note: data elements are abstract, i.e. if a key uses "DataElement", the reference may be a property, file, etc.
<i>Entity</i>	https://admin-shell.io/aas/3/2/AasSubmodelElements/Entity
	Entity
<i>EventElement</i>	https://admin-shell.io/aas/3/2/AasSubmodelElements/EventElement
	Event
	Note: event element is abstract.
<i>File</i>	https://admin-shell.io/aas/3/2/AasSubmodelElements/File
	File

<i>MultiLanguageProperty</i>	https://admin-shell.io/aas/3/2/AasSubmodelElements/MultiLanguageProperty
	Property with a value that can be provided in multiple languages
<i>Operation</i>	https://admin-shell.io/aas/3/2/AasSubmodelElements/Operation
	Operation
<i>Property</i>	https://admin-shell.io/aas/3/2/AasSubmodelElements/Property
	Property
<i>Range</i>	https://admin-shell.io/aas/3/2/AasSubmodelElements/Range
	Range with min and max
<i>ReferenceElement</i>	https://admin-shell.io/aas/3/2/AasSubmodelElements/ReferenceElement
	Reference
<i>RelationshipElement</i>	https://admin-shell.io/aas/3/2/AasSubmodelElements/RelationshipElement
	Relationship
<i>SubmodelElement</i>	https://admin-shell.io/aas/3/2/AasSubmodelElements/SubmodelElement
	SubmodelElement Note: SubmodelElements are abstract, i.e. if a key uses "SubmodelElement", the reference may be a property, a SubmodelElement list, an operation, etc.
<i>SubmodelElementCollection</i>	https://admin-shell.io/aas/3/2/AasSubmodelElements/SubmodelElementCollection
	Struct of SubmodelElements
<i>SubmodelElementList</i>	https://admin-shell.io/aas/3/2/AasSubmodelElements/SubmodelElementList
	List of SubmodelElements

Concept Descriptions




Figure 39. Metamodel of Concept Descriptions

Class:	<i>ConceptDescription</i>
---------------	---------------------------

Explanation:	The semantics of a property or other elements that may have a semantic description is defined by a concept description. The description of the concept should follow a standardized schema (realized as data specification template).		
Inherits from:	Identifiable ; HasDataSpecification		
ID:	https://admin-shell.io/aas/3/2/ConceptDescription		
Attribute	ID		
	Explanation	Type	Card.
<i>isCaseOf</i>	https://admin-shell.io/aas/3/2/ConceptDescription/isCaseOf		
	Reference to an external definition the concept is compatible to or was derived from Note: compare with is-case-of relationship in ISO 13584-32 ([26]) & IEC EN 61360 ([25])	Reference	0..*

Different types of SubmodelElements require different attributes to describe their semantics. This is why a concept description has at least one data specification template associated with it. This template defines the attributes needed to describe the semantics.

See IDTA-01003 series for predefined data specification templates.

Environment

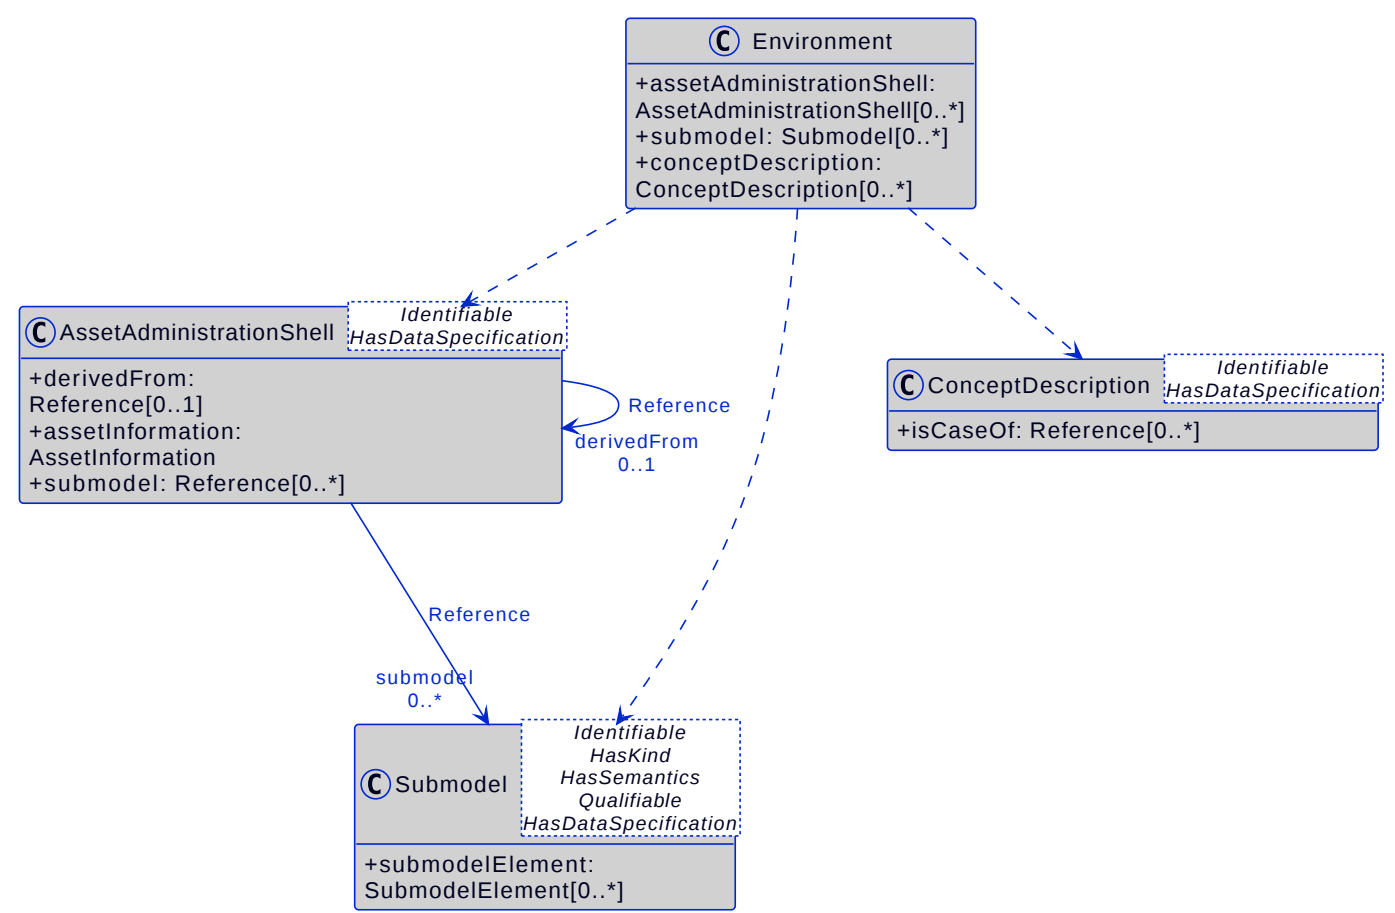


Figure 40. Metamodel for Environment

Note: *Environment* is not an identifiable or referable element. It is introduced to enable file transfer as well as serialization.

Class:	Environment		
Explanation:	Container for the sets of different identifiables		
Inherits from:	—		
ID:	https://admin-shell.io/aas/3/2/Environment		
Attribute	ID		
	Explanation	Type	Card.
assetAdministrationShell	https://admin-shell.io/aas/3/2/Environment/assetAdministrationShell		
	Asset Administration Shell	AssetAdministrationShell	0..*
submodel	https://admin-shell.io/aas/3/2/Environment/submodel		
	Submodel	Submodel	0..*

conceptDescription	https://admin-shell.io/aas/3/2/Environment/conceptDescription		
	Concept description	ConceptDescription	0..*

Referencing

Overview

Two kinds of references are distinguished: references to external objects or entities (external reference) and references to model elements of the same or another Asset Administration Shell (model reference). Model references are also used for metamodel inherent relationships like submodels of an Asset Administration Shell (notation see Annex [UML Templates](#)).

An external reference is a unique identifier. The identifier can be a concatenation of different identifiers, representing e.g. an IRDI-Path.

Note: references should not be mixed up with locators. Even URLs can be used as identifiers and do not necessarily describe a resource that can be accessed.

Reference Attributes

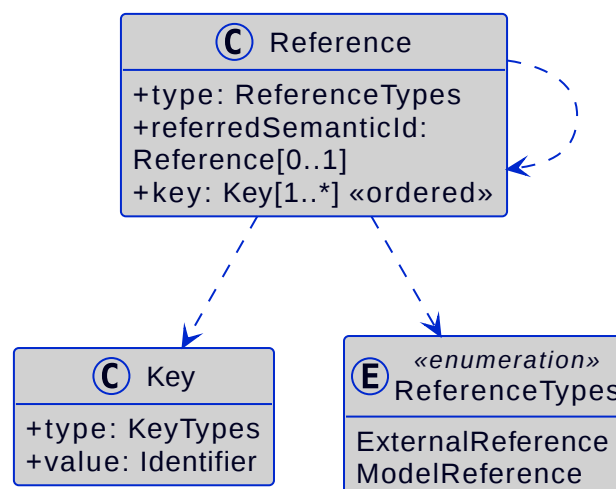


Figure 41. Metamodel of Reference

See Annex [Matching Algorithm for References](#) for reference matching.

Class:	Reference
Explanation:	Reference to either a model element of the same or another Asset Administration Shell or to an external entity A model reference is an ordered list of keys, each key referencing an element. The complete list of keys may, for example, be concatenated to a path that gives unique access to an element. An external reference is a reference to an external entity.
Inherits from:	—
ID:	https://admin-shell.io/aas/3/2/Reference

Attribute	ID		
	Explanation	Type	Card.
<i>type</i>	https://admin-shell.io/aas/3/2/Reference/type		
	Type of the reference Denotes whether the reference is an external reference or a model reference	ReferenceTypes	1
<i>referredSemanticId</i>	https://admin-shell.io/aas/3/2/Reference/referredSemanticId		
	Expected semantic ID of the referenced model element (<i>Reference/type=ModelReference</i>); there typically is no semantic ID for the referenced object of external references (<i>Reference/type=ExternalReference</i>). Note: if <i>Reference/referredSemanticId</i> is defined, the <i>semanticId</i> of the model element referenced should have a matching semantic ID. If this is not the case, a validator should raise a warning.	Reference	0..1
<i>key <<ordered>></i>	https://admin-shell.io/aas/3/2/Reference/key		
	Unique reference in its name space	Key	1..*

Reference Types Enumeration

Enumeration:	ReferenceTypes
Explanation:	Enumeration for denoting whether an element is an external or model reference
Set of:	—
ID:	https://admin-shell.io/aas/3/2/ReferenceTypes
Literal	ID
	Explanation
ExternalReference	https://admin-shell.io/aas/3/2/ReferenceTypes/ExternalReference
	External reference

ModelReference	https://admin-shell.io/aas/3/2/ReferenceTypes/ModelReference
	Model reference

Key Attributes

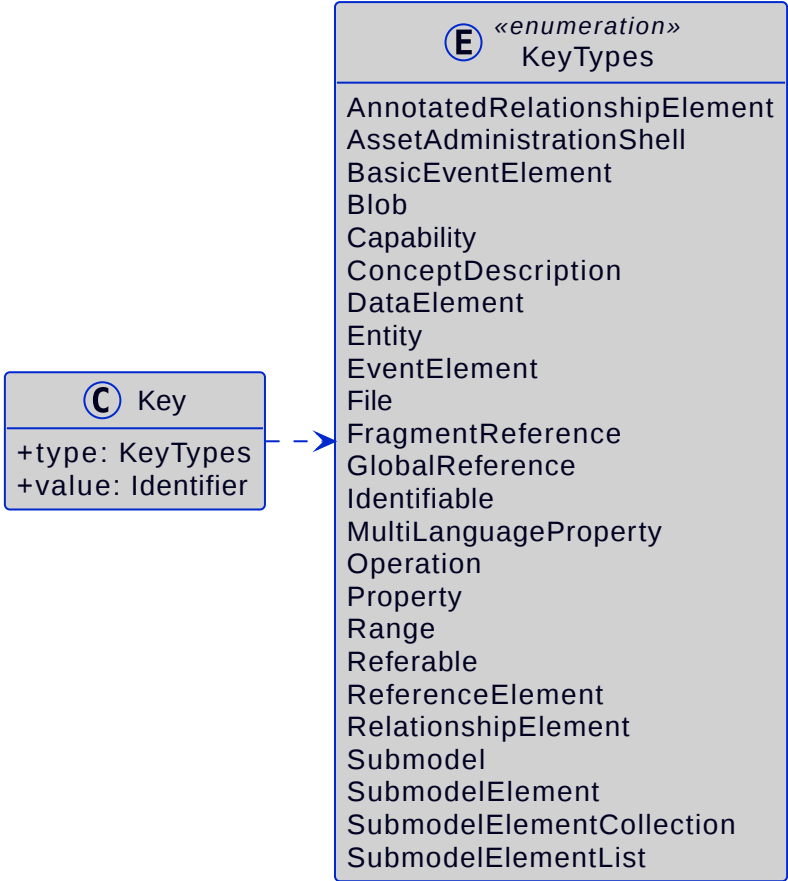


Figure 42. Metamodel of Keys

Keys are used to define references ([Reference](#)).

Class:	Key		
Explanation:	A key is a reference to an element by its ID		
Inherits from:	—		
ID:	https://admin-shell.io/aas/3/2/Key		
Attribute	ID		
	Explanation	Type	Card.

type	https://admin-shell.io/aas/3/2/Key/type		
	Denotes which kind of entity is referenced If <i>Key/type</i> = <i>GlobalReference</i>, the key represents a reference to a source that can be globally identified. If <i>Key/type</i> = <i>FragmentReference</i>, the key represents a bookmark or a similar local identifier within its parent element as specified by the key that precedes this key. In all other cases, the key references a model element of the same or another Asset Administration Shell. The name of the model element is explicitly listed.	KeyTypes	1
value	https://admin-shell.io/aas/3/2/Key/value		
	The key value, for example an IRDI or a URI or the idShort or any other fragment value	Identifier	1

An example for using a *FragmentId* as type of a key is a reference to an element within a file that is part of an Asset Administration Shell aasx package.

Key Types Enumeration

E «enumeration» KeyTypes
AnnotatedRelationshipElement AssetAdministrationShell BasicEventElement Blob Capability ConceptDescription DataElement Entity EventElement File FragmentReference GlobalReference Identifiable MultiLanguageProperty Operation Property Range Referable ReferenceElement RelationshipElement Submodel SubmodelElement SubmodelElementCollection SubmodelElementList

Figure 43. Metamodel of KeyTypes Enumeration

Enumeration:	<i>KeyTypes</i>
Explanation:	Enumeration of different key value types within a key
Set of:	FragmentKeys , AasReferables , GloballyIdentifiables
ID:	https://admin-shell.io/aas/3/2/KeyTypes
Literal	ID
	Explanation
<i>AnnotatedRelationshipElement</i>	https://admin-shell.io/aas/3/2/KeyTypes/AnnotatedRelationshipElement
	Annotated relationship element
<i>AssetAdministrationShell</i>	https://admin-shell.io/aas/3/2/KeyTypes/AssetAdministrationShell
	Asset Administration Shell
<i>BasicEventElement</i>	https://admin-shell.io/aas/3/2/KeyTypes/BasicEventElement
	Basic event element
<i>Blob</i>	https://admin-shell.io/aas/3/2/KeyTypes/Blob
	Blob
<i>Capability</i>	https://admin-shell.io/aas/3/2/KeyTypes/Capability
	Capability
<i>ConceptDescription</i>	https://admin-shell.io/aas/3/2/KeyTypes/ConceptDescription
	Concept Description
<i>DataElement</i>	https://admin-shell.io/aas/3/2/KeyTypes/DataElement
	Data Element Note: data elements are abstract, i.e. if a key uses "DataElement", the reference may be a property, file, etc.
<i>Entity</i>	https://admin-shell.io/aas/3/2/KeyTypes/Entity
	Entity
<i>EventElement</i>	https://admin-shell.io/aas/3/2/KeyTypes/EventElement
	Event Note: event element is abstract.

<i>File</i>	https://admin-shell.io/aas/3/2/KeyTypes/File
	File
<i>FragmentReference</i>	https://admin-shell.io/aas/3/2/KeyTypes/FragmentReference
	Bookmark or a similar local identifier of a subordinate part of a primary resource
<i>GlobalReference</i>	https://admin-shell.io/aas/3/2/KeyTypes/GlobalReference
	Global reference
<i>Identifiable</i>	https://admin-shell.io/aas/3/2/KeyTypes/Identifiable
	Identifiable Note: identifiable is abstract, i.e. if a key uses "Identifiable" the reference may be an Asset Administration Shell, a Submodel or a concept description.
<i>MultiLanguageProperty</i>	https://admin-shell.io/aas/3/2/KeyTypes/MultiLanguageProperty
	Property with a value that can be provided in multiple languages
<i>Operation</i>	https://admin-shell.io/aas/3/2/KeyTypes/Operation
	Operation
<i>Property</i>	https://admin-shell.io/aas/3/2/KeyTypes/Property
	Property
<i>Range</i>	https://admin-shell.io/aas/3/2/KeyTypes/Range
	Range with min and max
<i>Referable</i>	https://admin-shell.io/aas/3/2/KeyTypes/Referable
	Note: referables are abstract, i.e. if a key uses "Referable", the reference may be an Asset Administration Shell, a property, etc.
<i>ReferenceElement</i>	https://admin-shell.io/aas/3/2/KeyTypes/ReferenceElement
	Reference
<i>RelationshipElement</i>	https://admin-shell.io/aas/3/2/KeyTypes/RelationshipElement
	Relationship
<i>Submodel</i>	https://admin-shell.io/aas/3/2/KeyTypes/Submodel
	Submodel

<i>SubmodelElement</i>	https://admin-shell.io/aas/3/2/KeyTypes/SubmodelElement
	SubmodelElement
	Note: SubmodelElements are abstract, i.e. if a key uses "SubmodelElement", the reference may be a property, a SubmodelElement list, an operation, etc.
<i>SubmodelElementCollection</i>	https://admin-shell.io/aas/3/2/KeyTypes/SubmodelElementCollection
	Struct of SubmodelElements
<i>SubmodelElementList</i>	https://admin-shell.io/aas/3/2/KeyTypes/SubmodelElementList
	List of SubmodelElements

Logical Enumerations

[Figure 44](#) presents a logical model of key types. These logical enumerations may be used to formulate constraints.

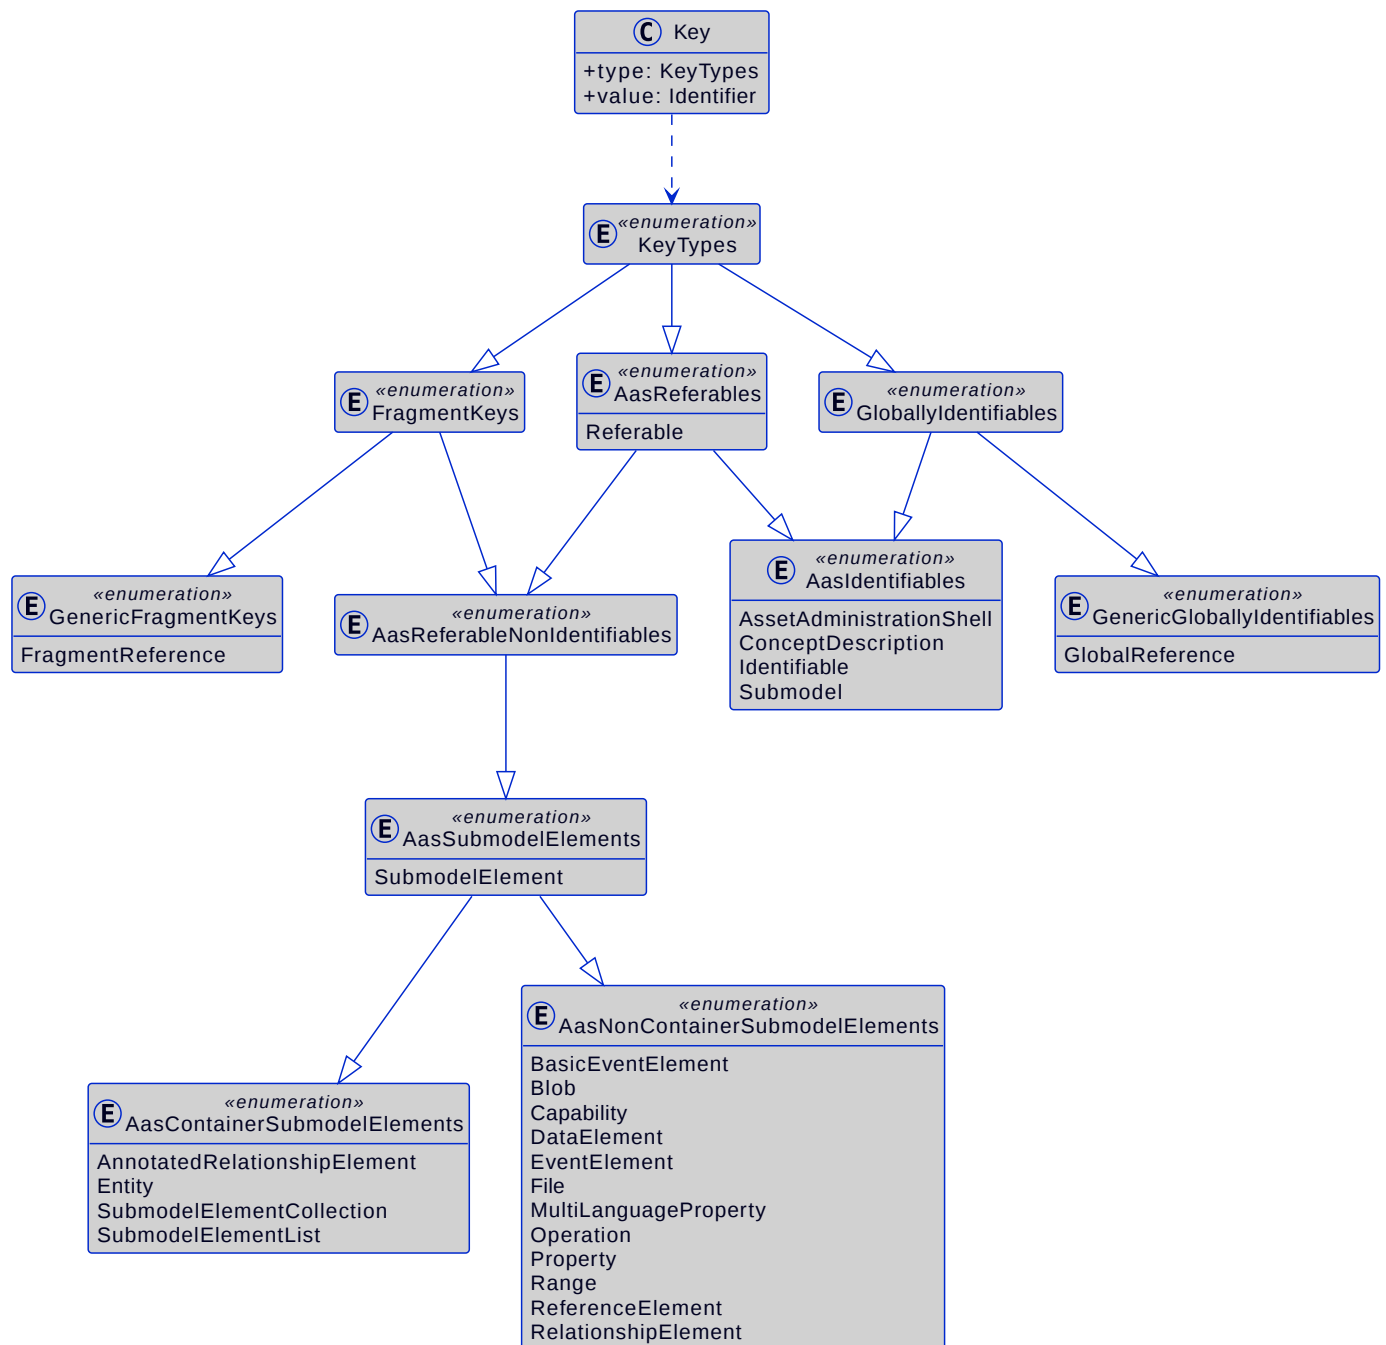


Figure 44. Logical Model for Keys of References (non-normative)

Logical Enumeration AasReferableNonIdentifiabiles

Enumeration:	<i>AasReferableNonIdentifiabiles</i>
Explanation:	Enumeration of different fragment key value types within a key Note: not used as type but in constraints.
Set of:	AasSubmodelElements
ID:	https://admin-shell.io/aas/3/2/AasReferableNonIdentifiabiles

Literal	ID
	Explanation
<i>AnnotatedRelationshipElement</i>	https://admin-shell.io/aas/3/2/AasReferableNonIdentifiabiles/AnnotatedRelationshipElement
	Annotated relationship element
<i>BasicEventElement</i>	https://admin-shell.io/aas/3/2/AasReferableNonIdentifiabiles/BasicEventElement
	Basic event element
<i>Blob</i>	https://admin-shell.io/aas/3/2/AasReferableNonIdentifiabiles/Blob
	Blob
<i>Capability</i>	https://admin-shell.io/aas/3/2/AasReferableNonIdentifiabiles/Capability
	Capability
<i>DataElement</i>	https://admin-shell.io/aas/3/2/AasReferableNonIdentifiabiles/DataElement
	Data Element Note: data elements are abstract, i.e. if a key uses "DataElement", the reference may be a property, file, etc.
<i>Entity</i>	https://admin-shell.io/aas/3/2/AasReferableNonIdentifiabiles/Entity
	Entity
<i>EventElement</i>	https://admin-shell.io/aas/3/2/AasReferableNonIdentifiabiles/EventElement
	Event Note: event element is abstract.
<i>File</i>	https://admin-shell.io/aas/3/2/AasReferableNonIdentifiabiles/File
	File
<i>MultiLanguageProperty</i>	https://admin-shell.io/aas/3/2/AasReferableNonIdentifiabiles/MultiLanguageProperty
	Property with a value that can be provided in multiple languages
<i>Operation</i>	https://admin-shell.io/aas/3/2/AasReferableNonIdentifiabiles/Operation
	Operation

<i>Property</i>	https://admin-shell.io/aas/3/2/AasReferableNonIdentifiabiles/Property
	Property
<i>Range</i>	https://admin-shell.io/aas/3/2/AasReferableNonIdentifiabiles/Range
	Range with min and max
<i>ReferenceElement</i>	https://admin-shell.io/aas/3/2/AasReferableNonIdentifiabiles/ReferenceElement
	Reference
<i>RelationshipElement</i>	https://admin-shell.io/aas/3/2/AasReferableNonIdentifiabiles/RelationshipElement
	Relationship
<i>SubmodelElement</i>	https://admin-shell.io/aas/3/2/AasReferableNonIdentifiabiles/SubmodelElement
	SubmodelElement Note: SubmodelElements are abstract, i.e. if a key uses "SubmodelElement", the reference may be a property, a SubmodelElement list, an operation, etc.
<i>SubmodelElementCollection</i>	https://admin-shell.io/aas/3/2/AasReferableNonIdentifiabiles/SubmodelElementCollection
	Struct of SubmodelElements
<i>SubmodelElementList</i>	https://admin-shell.io/aas/3/2/AasReferableNonIdentifiabiles/SubmodelElementList
	List of SubmodelElements

Logical Enumeration AasNonContainerSubmodelElements

Enumeration:	<i>AasNonContainerSubmodelElements</i>
Explanation:	Enumeration of non-container SubmodelElement types including abstract SubmodelElement types Note: not used as type but may be used in constraints.
Set of:	—
ID:	https://admin-shell.io/aas/3/2/AasNonContainerSubmodelElements
Literal	ID
	Explanation

<i>BasicEventElement</i>	https://admin-shell.io/aas/3/2/AasNonContainerSubmodelElements/BasicEventElement
	Basic event element
<i>Blob</i>	https://admin-shell.io/aas/3/2/AasNonContainerSubmodelElements/Blob
	Blob
<i>Capability</i>	https://admin-shell.io/aas/3/2/AasNonContainerSubmodelElements/Capability
	Capability
<i>DataElement</i>	https://admin-shell.io/aas/3/2/AasNonContainerSubmodelElements/DataElement
	Data element
	Note: data elements are abstract, i.e. if a key uses "DataElement", the reference may be a property, file, etc.
<i>EventElement</i>	https://admin-shell.io/aas/3/2/AasNonContainerSubmodelElements/EventElement
	Event
	Note: event element is abstract.
<i>File</i>	https://admin-shell.io/aas/3/2/AasNonContainerSubmodelElements/File
	File
<i>MultiLanguageProperty</i>	https://admin-shell.io/aas/3/2/AasNonContainerSubmodelElements/MultiLanguageProperty
	Property with a value that can be provided in multiple languages
<i>Operation</i>	https://admin-shell.io/aas/3/2/AasNonContainerSubmodelElements/Operation
	Operation
<i>Property</i>	https://admin-shell.io/aas/3/2/AasNonContainerSubmodelElements/Property
	Property
<i>Range</i>	https://admin-shell.io/aas/3/2/AasNonContainerSubmodelElements/Range
	Range with min and max
<i>ReferenceElement</i>	https://admin-shell.io/aas/3/2/AasNonContainerSubmodelElements/ReferenceElement
	Reference

<i>RelationshipElement</i>	https://admin-shell.io/aas/3/2/AasNonContainerSubmodelElements/RelationshipElement
	Relationship

Logical Enumeration AasContainerSubmodelElements

Enumeration:	<i>AasContainerSubmodelElements</i>
Explanation:	Enumeration of container SubmodelElement types including abstract container SubmodelElement types Note: not used as type but may be used in constraints.
Set of:	—
ID:	https://admin-shell.io/aas/3/2/AasContainerSubmodelElements
Literal	ID
	Explanation
<i>AnnotatedRelationshipElement</i>	https://admin-shell.io/aas/3/2/AasContainerSubmodelElements/AnnotatedRelationshipElement
	Annotated relationship element
<i>Entity</i>	https://admin-shell.io/aas/3/2/AasContainerSubmodelElements/Entity
	Entity
<i>SubmodelElementCollection</i>	https://admin-shell.io/aas/3/2/AasContainerSubmodelElements/SubmodelElementCollection
	Struct of SubmodelElements
<i>SubmodelElementList</i>	https://admin-shell.io/aas/3/2/AasContainerSubmodelElements/SubmodelElementList
	List of SubmodelElements

A minimum recursion depth of 32 for Container-Elements should be supported.

Note: This means for certification a maximum of 32 recursion test cases should be tested.

Logical Enumeration AasReferables

Enumeration:	<i>AasReferables</i>
---------------------	----------------------

Explanation:	Enumeration of referables
	Note: not used as type but in constraints.
Set of:	AasReferableNonIdentifiabes , AasIdentifiabes
ID:	https://admin-shell.io/aas/3/2/AasReferables
Literal	ID
	Explanation
<i>AnnotatedRelationshipElement</i>	https://admin-shell.io/aas/3/2/AasReferables/AnnotatedRelationshipElement
	Annotated relationship element
<i>AssetAdministrationShell</i>	https://admin-shell.io/aas/3/2/AasReferables/AssetAdministrationShell
	Asset Administration Shell
<i>BasicEventElement</i>	https://admin-shell.io/aas/3/2/AasReferables/BasicEventElement
	Basic event element
<i>Blob</i>	https://admin-shell.io/aas/3/2/AasReferables/Blob
	Blob
<i>Capability</i>	https://admin-shell.io/aas/3/2/AasReferables/Capability
	Capability
<i>ConceptDescription</i>	https://admin-shell.io/aas/3/2/AasReferables/ConceptDescription
	Concept description
<i>DataElement</i>	https://admin-shell.io/aas/3/2/AasReferables/DataElement
	Data element
	Note: data elements are abstract, i.e. if a key uses "DataElement", the reference may be a property, file, etc.
<i>Entity</i>	https://admin-shell.io/aas/3/2/AasReferables/Entity
	Entity
<i>EventElement</i>	https://admin-shell.io/aas/3/2/AasReferables/EventElement
	Event
	Note: event element is abstract.

<i>File</i>	https://admin-shell.io/aas/3/2/AasReferables/File
	File
<i>Identifiable</i>	https://admin-shell.io/aas/3/2/AasReferables/Identifiable
	Identifiable Note: identifiables are abstract, i.e. if a key uses "Identifiable", the reference may be an Asset Administration Shell, a concept description, etc.
<i>MultiLanguageProperty</i>	https://admin-shell.io/aas/3/2/AasReferables/MultiLanguageProperty
	Property with a value that can be provided in multiple languages
<i>Operation</i>	https://admin-shell.io/aas/3/2/AasReferables/Operation
	Operation
<i>Property</i>	https://admin-shell.io/aas/3/2/AasReferables/Property
	Property
<i>Range</i>	https://admin-shell.io/aas/3/2/AasReferables/Range
	Range with min and max
<i>Referable</i>	https://admin-shell.io/aas/3/2/AasReferables/Referable
	Note: referables are abstract, i.e. if a key uses "Referable", the reference may be an Asset Administration Shell, a property, etc.
<i>ReferenceElement</i>	https://admin-shell.io/aas/3/2/AasReferables/ReferenceElement
	Reference
<i>RelationshipElement</i>	https://admin-shell.io/aas/3/2/AasReferables/RelationshipElement
	Relationship
<i>Submodel</i>	https://admin-shell.io/aas/3/2/AasReferables/Submodel
	Submodel
<i>SubmodelElement</i>	https://admin-shell.io/aas/3/2/AasReferables/SubmodelElement
	SubmodelElement Note: SubmodelElements are abstract, i.e. if a key uses "SubmodelElement", the reference may be a property, a SubmodelElement list, an operation, etc.

<i>SubmodelElementCollection</i>	https://admin-shell.io/aas/3/2/AasReferables/SubmodelElementCollection
	Struct of SubmodelElements
<i>SubmodelElementList</i>	https://admin-shell.io/aas/3/2/AasReferables/SubmodelElementList
	List of SubmodelElements

Fragment Keys Enumeration

Enumeration:	<i>FragmentKeys</i>
Explanation:	Enumeration of different fragment key value types within a key Note: not used as type but in constraints.
Set of:	AasReferableNonIdentifiabiles , GenericFragmentKeys
ID:	https://admin-shell.io/aas/3/2/FragmentKeys
Literal	ID
	Explanation
<i>AnnotatedRelationshipElement</i>	https://admin-shell.io/aas/3/2/FragmentKeys/AnnotatedRelationshipElement
	Annotated relationship element
<i>BasicEventElement</i>	https://admin-shell.io/aas/3/2/FragmentKeys/BasicEventElement
	Basic event element
<i>Blob</i>	https://admin-shell.io/aas/3/2/FragmentKeys/Blob
	Blob
<i>Capability</i>	https://admin-shell.io/aas/3/2/FragmentKeys/Capability
	Capability
<i>DataElement</i>	https://admin-shell.io/aas/3/2/FragmentKeys/DataElement
	Data Element
	Note: data elements are abstract, i.e. if a key uses "DataElement", the reference may be a property, file, etc.
<i>Entity</i>	https://admin-shell.io/aas/3/2/FragmentKeys/Entity
	Entity

<i>EventElement</i>	https://admin-shell.io/aas/3/2/FragmentKeys/EventElement
	Event
	Note: event element is abstract.
<i>File</i>	https://admin-shell.io/aas/3/2/FragmentKeys/File
	File
<i>FragmentReference</i>	https://admin-shell.io/aas/3/2/FragmentKeys/FragmentReference
	Bookmark or a similar local identifier of a subordinate part of a primary resource
<i>MultiLanguageProperty</i>	https://admin-shell.io/aas/3/2/FragmentKeys/MultiLanguageProperty
	Property with a value that can be provided in multiple languages
<i>Operation</i>	https://admin-shell.io/aas/3/2/FragmentKeys/Operation
	Operation
<i>Property</i>	https://admin-shell.io/aas/3/2/FragmentKeys/Property
	Property
<i>Range</i>	https://admin-shell.io/aas/3/2/FragmentKeys/Range
	Range with min and max
<i>ReferenceElement</i>	https://admin-shell.io/aas/3/2/FragmentKeys/ReferenceElement
	Reference
<i>RelationshipElement</i>	https://admin-shell.io/aas/3/2/FragmentKeys/RelationshipElement
	Relationship
<i>SubmodelElement</i>	https://admin-shell.io/aas/3/2/FragmentKeys/SubmodelElement
	SubmodelElement
	Note: SubmodelElements are abstract, i.e. if a key uses "SubmodelElement", the reference may be a property, a SubmodelElement list, an operation, etc.
<i>SubmodelElementCollection</i>	https://admin-shell.io/aas/3/2/FragmentKeys/SubmodelElementCollection
	Struct of SubmodelElements
<i>SubmodelElementList</i>	https://admin-shell.io/aas/3/2/FragmentKeys/SubmodelElementList
	List of SubmodelElements

Logical Enumeration GenericFragmentKeys

Enumeration:	<i>GenericFragmentKeys</i>
Explanation:	Enumeration of generic fragment key value types within a key Note: not used as type but in constraints.
Set of:	—
ID:	https://admin-shell.io/aas/3/2/GenericFragmentKeys
Literal	ID
	Explanation
<i>FragmentReference</i>	https://admin-shell.io/aas/3/2/GenericFragmentKeys/FragmentReference Bookmark or a similar local identifier of a subordinate part of a primary resource

Logical Enumeration AasIdentifiables

Enumeration:	<i>AasIdentifiables</i>
Explanation:	Enumeration of all metamodel element types that represent identifiables Note: not used as type but in constraints.
Set of:	—
ID:	https://admin-shell.io/aas/3/2/AasIdentifiables
Literal	ID
	Explanation
<i>AssetAdministrationShell</i>	https://admin-shell.io/aas/3/2/AasIdentifiables/AssetAdministrationShell Asset Administration Shell
<i>ConceptDescription</i>	https://admin-shell.io/aas/3/2/AasIdentifiables/ConceptDescription Concept description

<i>Identifiable</i>	https://admin-shell.io/aas/3/2/AasIdentifiables/Identifiable
	Identifiable
	Note: Identifiables are abstract, i.e. if a key uses "Identifiable", the reference may be an Asset Administration Shell, a submodel, or a concept description.
<i>Submodel</i>	https://admin-shell.io/aas/3/2/AasIdentifiables/Submodel
	Submodel

Logical Enumeration GenericGloballyIdentifiables

Enumeration:	<i>GenericGloballyIdentifiables</i>
Explanation:	Enumeration of different key value types within a key
Set of:	—
ID:	https://admin-shell.io/aas/3/2/GenericGloballyIdentifiables
Literal	ID
	Explanation
<i>GlobalReference</i>	https://admin-shell.io/aas/3/2/GenericGloballyIdentifiables/GlobalReference
	Global reference

Logical Enumeration GloballyIdentifiables

Enumeration:	<i>GloballyIdentifiables</i>
Explanation:	Enumeration of globally identifiable elements
Set of:	https://admin-shell.io/aas/3/2/GenericGloballyIdentifiables , https://admin-shell.io/aas/3/2/AasIdentifiables
ID:	https://admin-shell.io/aas/3/2/GloballyIdentifiables
Literal	ID
	Explanation
<i>AssetAdministrationShell</i>	https://admin-shell.io/aas/3/2/GloballyIdentifiables/AssetAdministrationShell
	Asset Administration Shell

<i>ConceptDescription</i>	https://admin-shell.io/aas/3/2/GloballyIdentifiables/ConceptDescription
	Concept description
<i>GlobalReference</i>	https://admin-shell.io/aas/3/2/GloballyIdentifiables/GlobalReference
	Global reference
<i>Identifiable</i>	https://admin-shell.io/aas/3/2/GloballyIdentifiables/Identifiable
	Identifiable Note: Identifiables are abstract, i.e. if a key uses "Identifiable", the reference may be an Asset Administration Shell, a submodel, or a concept description.
<i>Submodel</i>	https://admin-shell.io/aas/3/2/GloballyIdentifiables/Submodel
	Submodel

Constraints for References

Constraints

Constraint AASd-121: For [References](#), the value of [Key/type](#) of the first `_key_` of `_Reference/keys_` shall be one of [GloballyIdentifiables](#).

Constraint AASd-122: For external references, i.e. [References](#) with `_Reference/type_` = [ExternalReference](#), the value of [Key/type](#) of the first key of `_Reference/keys_` shall be one of [GenericGloballyIdentifiables](#).

Constraint AASd-123: For model references, i.e. [References](#) with `_Reference/type_` = [ModelReference](#), the value of [Key/type](#) of the first `_key_` of `_Reference/keys_` shall be one of [AasIdentifiables](#).

Constraint AASd-124: For external references, i.e. [References](#) with `_Reference/type_` = [ExternalReference](#), the last `_key_` of `_Reference/keys_` shall be either one of [GenericGloballyIdentifiables](#) or one of [GenericFragmentKeys](#).

Constraint AASd-125: For model references, i.e. [References](#) with `Reference/type` = [ModelReference](#) with more than one key in `_Reference/keys_`, the value of [Key/type](#) of each of the keys following the first key of `_Reference/keys_` shall be one of [FragmentKeys](#).

Note: [Constraint AASd-125](#) ensures that the shortest path is used.

Constraint AASd-126: For model references, i.e. [References](#) with `_Reference/type_` = [ModelReference](#) with more than one key in `_Reference/keys_`, the value of [Key/type](#) of the last [Key](#) in the reference key chain may be one of [GenericFragmentKeys](#) or no key at all shall have a value out of [GenericFragmentKeys](#).

Constraint AASd-127: For model references, i.e. [References](#) with `_Reference/type_` = [ModelReference](#) with more than one key in `_Reference/keys_`, a key with [Key/type](#) `_FragmentReference_` shall be preceded by a key with [Key/type](#) `_File_` or `_Blob_`. All other Asset Administration Shell fragments, i.e. [Key/type](#) values out of [AasSubmodelElements](#), do not support fragments.

Note: which kind of fragments are supported depends on the content type and the specification of allowed fragment identifiers for the corresponding resource referenced.

Constraint AASd-128: For model references, i.e. [References](#) with `_Reference/type_ = ModelReference`, the [Key/value](#) of a [Key](#) preceded by a [Key](#) with `Key/type = SubmodelElementList` is an integer number denoting the position in the array of the SubmodelElement list.

Constraint AASd-137: For external references, i.e. [Reference](#) the value of any [Key/type](#) contained in the Reference shall not be one of [AasReferables](#).

Examples

In the following examples for valid und invalid model references and external references. The notation follows the grammar as defined in [Text Serialization of Values of Type "Reference"](#). In addition to the examples in [Examples for Text Serialization of Values of Type "Reference"](#) in this clause also the constraints as defined for references are taken into account.

[Examples for valid references:](#)

```
(Submodel)https://example.com/aas/1/1/1234859590  
[ModelRef](Submodel)https://example.com/aas/1/1/1234859590  
(GlobalReference)https://example.com/specification.html  
[ExternalRef](GlobalReference)https://example.com/specification.html
```

[Examples for invalid references:](#)

```
[Submodel](GlobalReference)https://example.com/aas/1/1/1234859590
```

Key type "Submodel" is not a globally identifiable (see [Constraint AASd-121](#)).

```
[ExternalRef](Submodel)https://example.com/aas/1/1/1234859590
```

Key type "Submodel" is no generic globally identifiable (see [Constraint AASd-122](#)).

```
[ModelRef](GlobalReference)https://example.com/aas/1/1/1234859590
```

Key type "GlobalReference" is no AAS identifiable (see [Constraint AASd-123](#)). The last key type "GlobalReference" is neither a generic globally identifiable nor a generic fragment key (see [Constraint AASd-124](#)).

```
[ExternalRef](GlobalReference)https://example.com/aas/1/1/1234859590  
(SubmodelElementCollection)Document (File)file (FragmentReference)tag
```

This example violates [Constraint AASd-135](#).

[Examples for valid external references:](#)

(GlobalReference)https://example.com/ressource

(GlobalReference)0173-1#02-EXA123#001

(GlobalReference)https://example.com/specification.html (FragmentReference)Hints

Note:

(GlobalReference)https://example.com/specification.html (FragmentReference)Hints

represents the path with fragment identifier

https://example.com/specification.html#Hints

Examples for valid model references:

(AssetAdministrationShell)https://example.com/aas/1/0/12348

(Submodel)https://example.com/aas/1/1/1234859590

(Submodel)https://example.com/aas/1/1/1234859590, (File)Specification

(ConceptDescription)0173-1#02-BAA120#008

(Submodel)https://example.com/aas/1/1/1234859590, (SubmodelElementList)Documents,
(SubmodelElementCollection)0, (MultiLanguageProperty)Title

(Submodel)https://example.com/aas/1/1/1234859590, (SubmodelElementCollection)Manual,
(MultiLanguageProperty)Title

Note:

The extract

(SubmodelElementCollection)0, (MultiLanguageProperty)Title

from

(Submodel)https://example.com/aas/1/1/1234859590, (SubmodelElementList)Documents,
(SubmodelElementCollection)0, (MultiLanguageProperty)Title

may be identical to the extract

```
(SubmodelElementCollection)Manual, (MultiLanguageProperty)Title
```

from

```
(Submodel)https://example.com/aas/1/1/1234859590, (SubmodelElementCollection)Manual,  
(MultiLanguageProperty)Title
```

semantically and content-wise. The difference is that more than one document is allowed in the first Submodel and thus a SubmodelElement list is defined: elements in a list are numbered. In the second Submodel several documents may be added as collections but the number is typically fixed.

```
(Submodel)https://example.com/aas/1/1/1234859590, (File)Specification,  
(FragmentReference)Hints
```

Note: assuming the file has the value using the absolute path

```
https://example.com/specification.html
```

(and not a relative path), the first reference points to the same information as the global reference

```
(GlobalReference)https://example.com/specification.html, (FragmentReference)Hints
```

```
(Submodel)https://example.com/aas/1/1/1234859590, (Blob)Specification,  
(FragmentReference)Hints
```

[Examples for invalid model references:](#)

```
(GlobalReference)https://example.com/aas/1/1/1234859590
```

This is an external reference but no model reference.

```
(Property)0173-1#02-BAA120#008
```

This reference does not start with the ID of an Identifiable, i.e. key type "Property" is no AAS identifiable (see [Constraint AASd-123](#)). Additionally, the value is not a valid [idShort](#) for a Property SubmodelElement since it contains special characters like "#" (see [Constraint AASd-002](#)).

```
[ModelRef](FragmentReference)Hints (Property)Temperature
```

Key "Property" is no generic fragment key and therefore fragment key "FragmentReference" is not allowed before (see

[Constraint- AASd-126](#)).

```
(Submodel)https://example.com/aas/1/1/1234859590, (EventElement)Event,  
(FragmentReference)Comment
```

This model reference is invalid because fragment references so far are only defined for "File" and "Blob" SubmodelElements (see [Constraint AASd-127](#)).

```
(AssetAdministrationShell)https://example.com/aas/1/0/12348,  
(Submodel)https://example.com/aas/1/1/1234859590, (Property)Temperature
```

This is not a valid model reference because key type "AssetAdministrationShell" and "Submodel" are both global identifiables and there shall be only one (see Constraints [Constraint AASd-125](#)).

Data Types

Predefined Simple Data Types

The metamodel of the Asset Administration Shell uses some of the predefined simple data types of the XML Schema Definition (XSD) as its basic data types. See [Table 3](#) for an overview of the used types. Their definition is outside the scope of this document.

The meaning and format of xsd types is specified in XML Schema 1.0 (<https://www.w3.org/TR/xmlschema-2>). The simple type "langString" is specified in the Resource Description Framework (RDF) ^[1].

See [Constraints for Types](#) for constraints on types.

Table 3. Simple Data Types Used in Metamodel

Source	Basic Data Type	Value Range	Sample Values
xsd	string	Character string (but not all Unicode character strings)	"Hello world", "הברכה הברכה הברכה", "הברכה"
xsd	base64Binary	base64-encoded binary data	SGVsbG8sIFdvcmxkIQ==
xsd	boolean	true, false	true, false
xsd	dateTime	Date and time with or without time zone	"2000-01-01T14:23:00", "2000-01-01T14:23:00.66372+14:00" ^[2]
xsd	duration	Duration of time	"-P1Y2M3DT1H", "PT1H5M0S"

Source	Basic Data Type	Value Range	Sample Values
rdf	langString	Strings with language tags	"Hello"@en, "Halo"@de Note: this is written in RDF/Turtle syntax, only "Hello" and "Halo" are the actual values.

Primitive Data Types

[Table 4](#) lists the Primitives used in the metamodel. Primitive data types start with a capital letter.

Note: see [Constraints for Types](#) for constraints on types.

Table 4. Primitive Data Types Used in Metamodel

Primitive	ID	
	Definition	Value Examples
<i>BlobType</i>	https://admin-shell.io/aas/3/2/BlobType	
	<i>base64binary</i> to represent file content (binaries and non-binaries)	SGVsbG8sIFdvcmxkIQ== for "Hello, World!"
<i>ContentType</i>	admin-shell.io/aas/3/2/ContentType	
	<i>string</i> with max 128 and min 1 characters Any content type as specified in RFC2046 . The content type should be registered by the Internet Assigned Numbers Authority (IANA) as specified in RFC2048 .	application/pdf image/jpeg
<i>DateTimeUtc</i>	https://admin-shell.io/aas/3/2/DateTimeUtc	
	<i>dateTime</i> for UTC	1997-07-16T19:20+01:00 2025-02-24T12:31:14Z

Identifier	https://admin-shell.io/aas/3/2/Identifier	
	string with max 2048 and min 1 characters Note: For Identifier it is recommended to use existing standards, for example ID-Link (IEC 61406) may be used for the globalAssetId. Typically, identifier strings do not contain blanks, emoticons or carriage returns because they are not representable in existing systems.	https://cust/123456 0173-1#02-BAA120#008
LabelType	https://admin-shell.io/aas/3/2/LabelType	
	string with max 64 and min 1 characters	"ABC1234"

<i>LangStringSet</i>	https://admin-shell.io/aas/3/2/LangStringSet <i>Array of elements of type langString</i> Note 1: langString is a RDF data type. Note 2: a langString is a string value tagged with a language code. Realization depends on the serialization rules for a technology. Example for the attribute with name "description" of "Referable", i.e. of type "MultiLanguageTextType": In xml: <pre> <description> <langStringTextType> <language>en</language> <text>This is a multi-language value in English</text> </langStringTextType> <langStringTextType> <language>de</language> <text>Das ist ein Multi-Language-Wert in Deutsch</text> </langStringTextType> </description> </pre> In rdf: <pre> [] <https://admin-shell.io/aas/3/2/Referable/description> [rdf:type aas:LangStringTextType ; <https://admin-shell.io/aas/3/2/AbstractLangString/language> "en"^^xs:string ; <https://admin-shell.io/aas/3/2/AbstractLangString/text> "This is a multi-language value in English"^^xs:string ;] ; . </pre> In JSON : <pre> "description": [{ "language": "en", "text": "This is a multi-language value in English." }, { "language": "de", "text": "Das ist ein Multi-Language-Wert in Deutsch." }] </pre>
-----------------------------	---

<i>MessageTopicType</i>	https://admin-shell.io/aas/3/2/MessageTopicType	
	<i>string</i> with max 255 and min 1 characters	
<i>MultiLanguageNameType</i>	https://admin-shell.io/aas/3/2/MultiLanguageNameType	
	LangStringSet Each langString within the array of strings has a max 128 of and a min of 1 characters (as for NameType).	See LangStringSet
<i>MultiLanguageTextType</i>	https://admin-shell.io/3/2/MultiLanguageTextType	
	LangStringSet Each string within langString has a max of 1,023 and min of 1 characters.	See LangStringSet
<i>NameType</i>	https://admin-shell.io/aas/3/2/NameType	
	<i>string</i> with max 128 and min 1 characters	"ManufacturerPartId"
<i>PathType</i>	https://admin-shell.io/aas/3/2/PathType	
	<i>string</i> with max 2048 and min 1 characters conformant to a URI as per RFC 2396 Note: Values with this restriction are also conformant to the xsd datatype anyURI. "A wide range of internationalized resource identifiers can be specified when an anyURI is called for, and still be understood as URIs per RFC 2396 and its successor(s)." Source: W3C XML Schema Definition Language (XSD) 1.0 Part 2: Datatypes	./Specification.pdf file:c:/local/Specification.pdf http://www.example.org FTP://unicode.org

QualifierType	https://admin-shell.io/aas/3/2/QualifierType	
	NameType	"ExpressionSemantic" (as specified in DIN DKE SPEC 92000:2019-09, see [16]) "life cycle qual" (as specified in IEC 61360-7 - IEC/SC 3D - Common Data Dictionary)
RevisionType	https://admin-shell.io/aas/3/2/RevisionType	
	string with max 4 and min 1 characters following the following regular expression: ^([0-9] [1-9][0-9]*)\$	"0" "7" "567"
ValueDataType	https://admin-shell.io/aas/3/2/ValueDataType	
	any xsd atomic type as specified via DataTypeDefXsd	"This is a string value" 10 1.5 2020-04-01 True
VersionType	https://admin-shell.io/aas/3/2/VersionType	
	string with max 4 and min 1 characters following the following regular expression: ^([0-9] [1-9][0-9]*)\$	"1" "9999"

Enumeration for SubmodelElement Value Types

Enumerations are primitive data types. Most of the enumerations are defined in the context of their class. This clause defines enumerations for SubmodelElement value types^[3].

The predefined types used to define the type of values of properties and other values use the names and the semantics of XML Schema Definition (XSD)^[4]. Additionally, the type "langString" with the semantics as defined in the Resource Description Framework (RDF)^[5] is used. "langString" is a string value tagged with a language code.

Note 1: RDF^[6] uses XML Schema Built-in data types from Version 1.1 but recommends to use only a subset of xsd data types. That is why they are excluded from the allowed data types in [DataTypeDefXsd](#).

- XSD BuildIn List types are not supported (ENTITIES, IDREFS and NMTOKENS).
- XSD string BuildIn types are not supported (normalizedString, token, language, NCName, ENTITY, ID, IDREF).
- The following XSD primitive types are not supported: NOTATION, QName.

Note 2: additionally, the following RDF types are not supported in [DataTypeDefXsd](#): HTML and XMLLiteral.

Note 3: Numeric data types in XML Schema are based on the definitions of IEEE 754 with slight adoptions. For instance, float and double types use different exponent ranges. In any case, solely the XML Schema data type definitions are applicable for AAS values.




Figure 45. DefTypeDefRdf Enumeration

The enumeration is derived from [Figure 47](#).

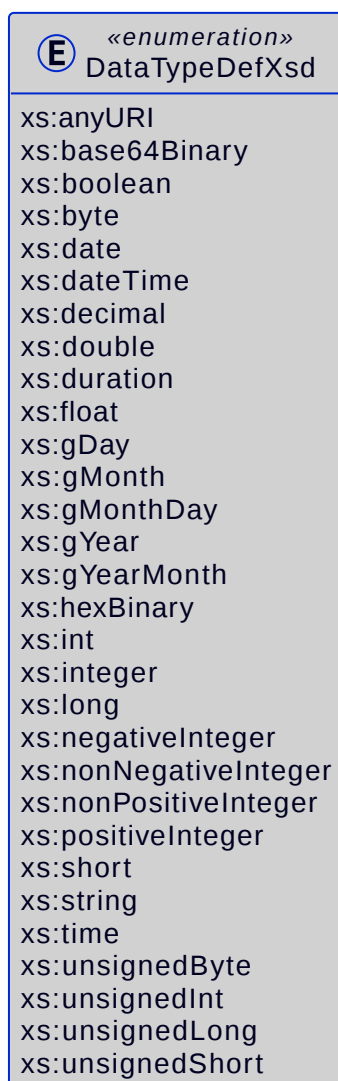


Figure 46. Data TypeDefXsd Enumeration

[Table 5](#) depicts example values and the value range of the different data types.

The left column "Data Type" shows the data types which can be used for SubmodelElement values. The data types are defined according to the W3C XML Schema (<https://www.w3.org/TR/xmlschema-2/#built-in-datatypes> and <https://www.w3.org/TR/xmlschema-2/#built-in-derived>). "Value Range" further explains the possible range of data

values for this data type. The right column shows related examples for values of the corresponding data type.

Table 5. Data Types with Examples ^[4]

	Data Type	Value Range	Sample Values
Core types	<i>xs:string</i>	Character string (but not all Unicode character strings)	"Hello world" "רררררר רררר רררר" "רררררר"
	<i>xs:boolean</i>	true, false	true, false
	<i>xs:decimal</i>	Arbitrary-precision decimal numbers	-1.23 126789672374892739424.543233 +100000.00, 210
	<i>xs:integer</i>	Arbitrary-size integer numbers	-1 0 126789675432332938792837429837429837429 +100000
IEEE floating-point numbers	<i>xs:double</i>	64-bit floating point numbers incl. $\pm\text{Inf}$, ± 0 , NaN	-1.0 +0.0 -0.0 234.567e8 -INF NaN
	<i>xs:float</i>	32-bit floating point numbers incl. $\pm\text{Inf}$, ± 0 , NaN	-1.0 +0.0 -0.0 234.567e8 -INF NaN
Time and dates	<i>xs:date</i>	Dates (yyyy-mm-dd) with or without time zone	"2000-01-01" "2000-01-01Z" "2000-01-01+12:05"

	Data Type	Value Range	Sample Values
	<i>xs:time</i>	Times (hh:mm:ss.sss...) with or without time zone	"14:23:00" "14:23:00.527634Z" "14:23:00+03:00"
	<i>xs:dateTime</i>	Date and time with or without time zone	"2000-01-01T14:23:00" "2000-01-01T14:23:00.66372+14:00" [7]
Recurring and partial dates	<i>xs:gYear</i>	Gregorian calendar year	"2000" "2000+03:00"
	<i>xs:gMonth</i>	Gregorian calendar month	"--04" "--04+03:00"
	<i>xs:gDay</i>	Gregorian calendar day of the month	"---04" "---04+03:00"
	<i>xs:gYearMonth</i>	Gregorian calendar year and month	"2000-01" "2000-01+03:00"
	<i>xs:gMonthDay</i>	Gregorian calendar month and day	"--01-01" "--01-01+03:00"
	<i>xs:duration</i>	Duration of time	"P30D" "-P1Y2M3DT1H", "PT1H5M0S"
Limited-range integer numbers	<i>xs:byte</i>	-128...+127 (8 bit)	-1, 0 127
	<i>xs:short</i>	-32768...+32767 (16 bit)	-1, 0 32767
	<i>xs:int</i>	2147483648...+2147483647 (32 bit)	-1, 0 2147483647
	<i>xs:long</i>	-9223372036854775808...+9223372036854775807 (64 bit)	-1 0, 9223372036854775807
	<i>xs:unsignedByte</i>	0...255 (8 bit)	0 1 255

	Data Type	Value Range	Sample Values
	<i>xs:unsignedShort</i>	0...65535 (16 bit)	0 1 65535
	<i>xs:unsignedInt</i>	0...4294967295 (32 bit)	0 1 4294967295
	<i>xs:unsignedLong</i>	0...18446744073709551615 (64 bit)	0 1 18446744073709551615
	<i>xs:positiveInteger</i>	Integer numbers >0	1 7345683746578364857368475638745
	<i>xs:nonNegativeInteger</i>	Integer numbers ≥0	0 1 734568374657836485736847563
	<i>xs:negativeInteger</i>	Integer numbers <0	-1 -23487263847628376482736487263
	<i>xs:nonPositiveInteger</i>	Integer numbers ≤0	-1 0 -938458374985739874987989873
Encoded binary data	<i>xs:hexBinary</i>	Hex-encoded binary data	"6b756d6f77617368657265"
	<i>xs:base64Binary</i>	Base64-encoded binary data	SGVsbG8sIFdvcmxkIQ==
Miscellaneous types	<i>xs:anyURI</i>	Absolute or relative URIs and IRIs	https://customer.com/demo/aas/1/1/1234859590 "urn:example:company:1.0.0"

	Data Type	Value Range	Sample Values
	<i>rdf:langString</i>	Strings with language tags	"Hello"@en "Hallo"@de Note: this is written in RDF/Turtle syntax, @en and de are the language tags.

Enumeration:	DataTypeDefXsd
Explanation:	Enumeration listing selected xsd anySimpleTypes of XML Schema 1.0 For more details see https://www.w3.org/TR/xmlschema-2/#built-in-primitive-datatypes
Set of:	—
ID:	https://admin-shell.io/aas/3/2/DataTypeDefXsd
Literal	Explanation
<i>xs:anyURI</i>	see: https://www.w3.org/TR/xmlschema-2/#anyURI
<i>xs:base64Binary</i>	see: https://www.w3.org/TR/xmlschema-2/#base64Binary
<i>xs:boolean</i>	see https://www.w3.org/TR/xmlschema-2/#boolean
<i>xs:byte</i>	see https://www.w3.org/TR/xmlschema-2/#byte
<i>xs:date</i>	see https://www.w3.org/TR/xmlschema-2/#date
<i>xs:dateTime</i>	see https://www.w3.org/TR/xmlschema-2/#dateTime
<i>xs:decimal</i>	see https://www.w3.org/TR/xmlschema-2/#decimal
<i>xs:double</i>	see https://www.w3.org/TR/xmlschema-2/#double
<i>xs:duration</i>	see https://www.w3.org/TR/xmlschema-2/#duration
<i>xs:float</i>	see https://www.w3.org/TR/xmlschema-2/#float
<i>xs:gDay</i>	see https://www.w3.org/TR/xmlschema-2/#gDay
<i>xs:gMonth</i>	see https://www.w3.org/TR/xmlschema-2/#gMonth
<i>xs:gMonthDay</i>	see https://www.w3.org/TR/xmlschema-2/#gMonthDay
<i>xs:gYear</i>	see https://www.w3.org/TR/xmlschema-2/#gYear
<i>xs:gYearMonth</i>	see https://www.w3.org/TR/xmlschema-2/#gYearMonth

<i>xs:hexBinary</i>	see https://www.w3.org/TR/xmlschema-2/#hexBinary
<i>xs:int</i>	see https://www.w3.org/TR/xmlschema-2/#int
<i>xs:integer</i>	see https://www.w3.org/TR/xmlschema-2/#integer
<i>xs:long</i>	see https://www.w3.org/TR/xmlschema-2/#long
<i>xs:negativeInteger</i>	see https://www.w3.org/TR/xmlschema-2/#negativeInteger
<i>xs:nonNegativeInteger</i>	see: https://www.w3.org/TR/xmlschema-2/#nonNegativeInteger
<i>xs:nonPositiveInteger</i>	see: https://www.w3.org/TR/xmlschema-2/#nonPositiveInteger
<i>xs:positiveInteger</i>	see: https://www.w3.org/TR/xmlschema-2/#positiveInteger
<i>xs:short</i>	see: https://www.w3.org/TR/xmlschema-2/#short
<i>xs:string</i>	see: https://www.w3.org/TR/xmlschema-2/#string
<i>xs:time</i>	see: https://www.w3.org/TR/xmlschema-2/#time
<i>xs:unsignedByte</i>	see: https://www.w3.org/TR/xmlschema-2/#unsignedShort
<i>xs:unsignedInt</i>	see: https://www.w3.org/TR/xmlschema-2/#unsignedInt
<i>xs:unsignedLong</i>	see: https://www.w3.org/TR/xmlschema-2/#unsignedLong
<i>xs:unsignedShort</i>	see: https://www.w3.org/TR/xmlschema-2/#unsignedShort

Enumeration:	DataTypeDefRdf
Explanation:	Enumeration listing all RDF types
Set of:	—
ID:	https://admin-shell.io/aas/3/2/DataTypeDefRdf
Literal	Explanation
<i>rdf:langString</i>	String with a language tag

RDF requires IETF BCP 47^[8] language tags. Simple two-letter language tags for locales like "de" conformant to ISO 639-1 are allowed, as well as language tags plus extension like "de-DE" for country code, dialect, etc. like in "en-US" for English (United States) or "en-GB" for English (United Kingdom). IETF language tags are referencing ISO 639, ISO 3166 and ISO 15924.

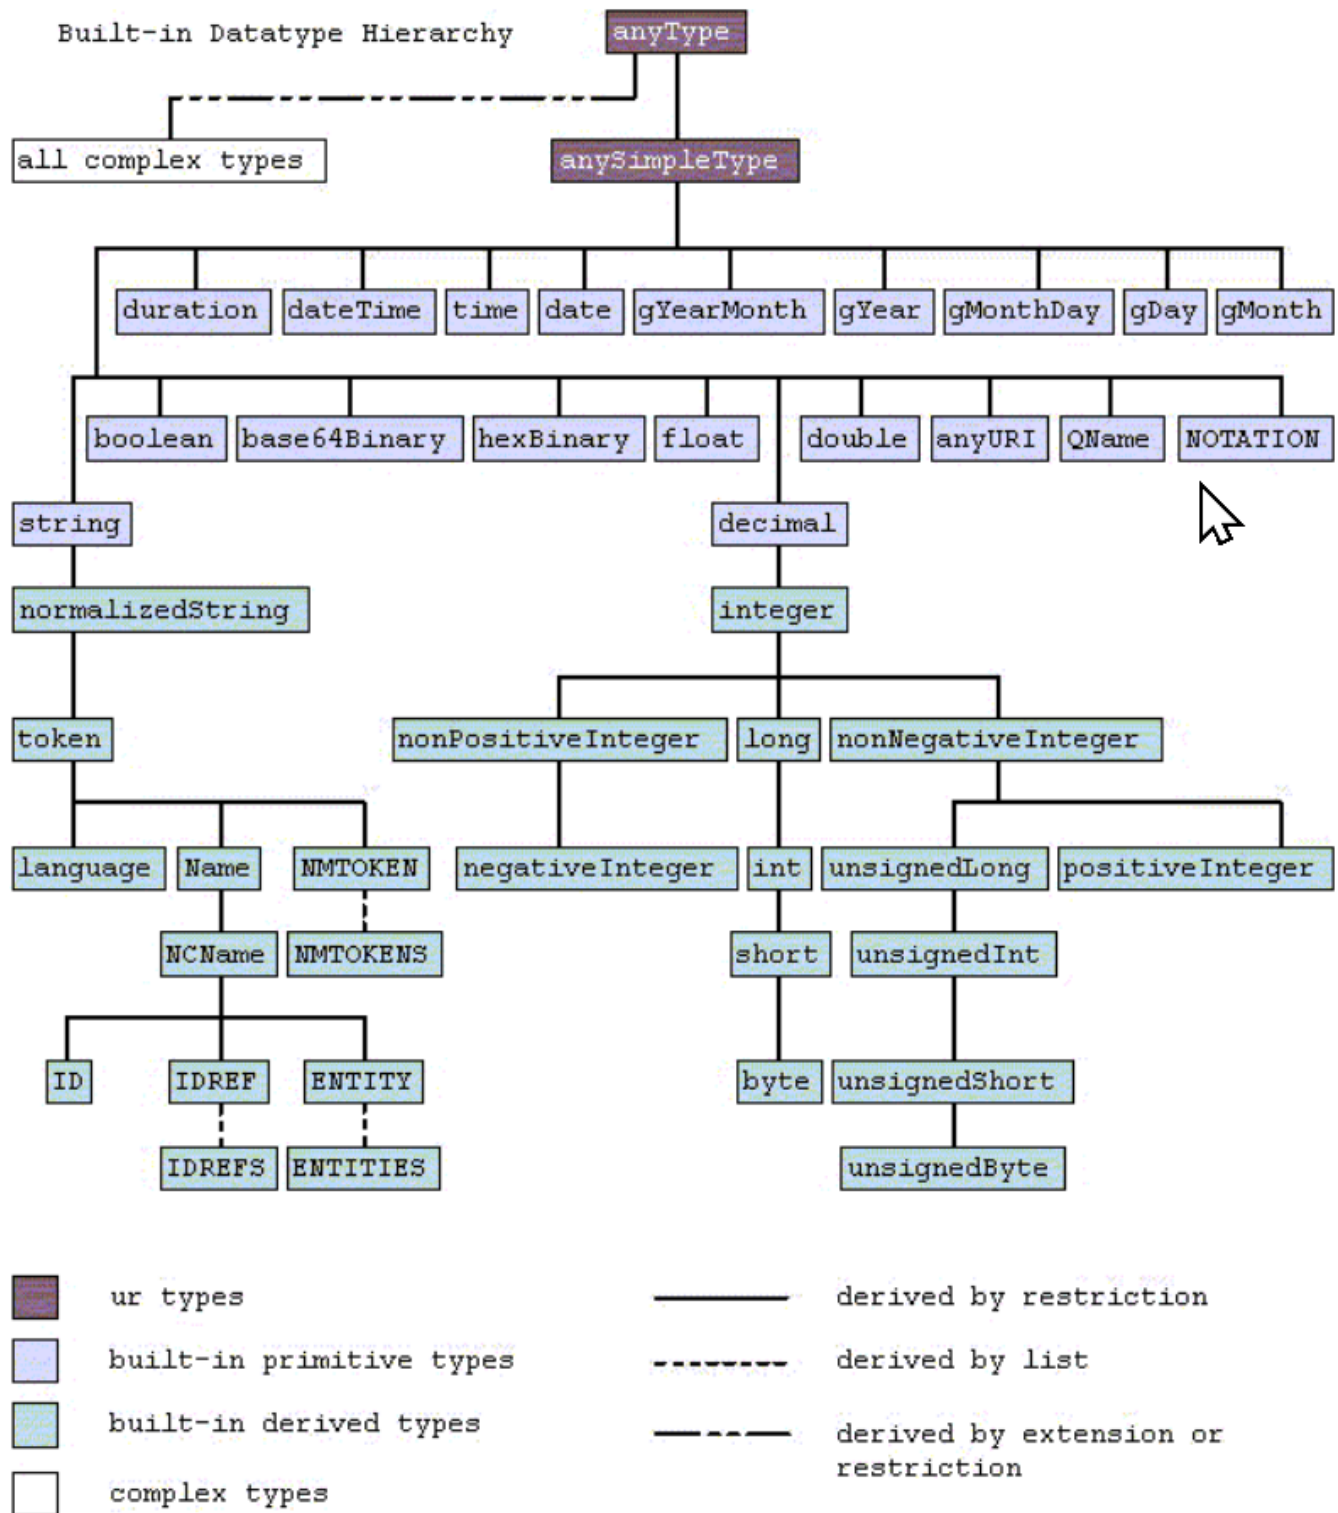


Figure 47. Built-In Types of XML Schema Definition 1.0 (XSD)^[5]

Constraints

Introduction

This clause documents constraints that represent global invariants, i.e. constraints that cannot be assigned to a single class.

In contrast, a class invariant is a constraint that must be true for all instances of a class at any time. They are documented as part of the class specification.

Constraints for Referables and Identifiables

Constraint AASd-117: [idShort](#) of non-identifiable [Referables](#) not being a direct child of a [SubmodelElementList](#) shall be specified.

Note: in other words (AASd-117), *idShort* is mandatory for all *Referables* except for referables being direct childs of *SubmodelElementLists* and for all *Identifiables*.

Constraint AASd-022: [idShort](#) of non-identifiable referables within the same name space shall be unique (case-sensitive).

Note: AASd-022 also means that *idShorts* of referables shall be matched sensitive to the case.

Constraints for Qualifiers

Constraint AASd-021: Every qualifiable shall only have one qualifier with the same [Qualifier/type](#).

Constraint AASd-119: If any [Qualifier/kind](#) value of a [Qualifiable/qualifier](#) is equal to [TemplateQualifier](#) and the qualified element inherits from [HasKind](#), the qualified element shall be of kind `_Template_` (`_HasKind/kind_ = Template`)

Constraint AASd-129: If any [Qualifier/kind](#) value of a [SubmodelElement/qualifier](#) (attribute `_qualifier_` inherited via [Qualifiable](#)) is equal to [TemplateQualifier](#), the SubmodelElement shall be part of a Submodel template, i.e. a `_Submodel_` with [Submodel/kind](#) (attribute `_kind_` inherited via [HasKind](#)) value equal to [Template](#). Exception: the SubmodelElement is part of an OperationVariable.

Constraints for Extensions

Constraint AASd-077: The name of an extension ([Extension/name](#)) within [HasExtensions](#) shall be unique.

Constraints for Asset-Related Information

Constraint AASd-116: "globalAssetId" (case-insensitive) is a reserved key for [SpecificAssetId/name](#) with the semantics as defined in <https://admin-shell.io/aas/3/x/AssetInformation/globalAssetId>, x being the minor version of the used specification.

Note: AASd-116 is important to enable a generic search across global and specific asset IDs (e.g. in IDTA-01002-3-0 discovery operations like GetAllAssetLinksById). In the future the constraint might become more strict in stating that the name "globalAssetId" shall not be used as SpecificAssetId/name.

Constraints for Types

Constraint AASd-130: An attribute with data type "string" shall be restricted to the characters as defined in XML Schema 1.0, i.e. the string shall consist of these characters only: `^[x09\x0A\x0D\x20-\uD7FF\uE000-\uFFFD\u00010000-\u0010FFFF]*$`.

Constraint AASd-130 ensures that encoding and interoperability between different serializations is possible. See <https://www.w3.org/TR/xml/#charsets> for more information on XML Schema 1.0 string handling.

Therefore, we need to restrict an attribute of data type 'string' to the characters that can be represented in any exchange format and language. Otherwise, strings in other formats such as JSON could not be converted to XML.

The string contains only valid Unicode characters in the range of encoded in UTF-16 format. The character set of XML includes (given as numerical code points and/or ranges in Unicode):

- 0x09: ASCII horizontal tab,
- 0x0A: ASCII linefeed (newline),
- 0x0D: ASCII carriage return.
- 0x20: ASCII space,
- 0x20 - 0xD7FF: all the characters of the Basic Multilingual Plane, and
- 0x00010000-0x0010FFFF: all the characters beyond the Basic Multilingual Plane (e.g., emoticons).

This leads to the following regular expression:

```
^[\x09\x0A\x0D\x20-\uD7FF\uE000-\uFFFF\u00010000-\u0010FFFF]*$
```

Where:

^: asserts the start of the string.

[\x09\x0A\x0D\x20-\uD7FF\uE000-\uFFFF\u00010000-\u0010FFFF]: defines a character class that allows various Unicode characters, with the following elements:

- \x09: ASCII horizontal tab.
- \x0A: ASCII linefeed (newline). \x0D: ASCII carriage return.
- \x20: ASCII space. -: Represents a range. \uD7FF: The upper limit of the Basic Multilingual Plane (BMP) in UTF-16.
- \uE000-\uFFFF: Represents the range of characters from the start of the supplementary planes up to the last valid Unicode character (excluding surrogate pairs).
- \u00010000-\u0010FFFF: Represents the range of valid surrogate pairs used for characters beyond the BMP.
- *: Allows for zero or more occurrences of the characters within the character class.
- \$: Asserts the end of the string.

[1] see: <https://www.w3.org/TR/rdf11-concepts/>

[2] Corresponds to [xs:dateTime](#) in XML Schema 1.0

[3] E.g. Property/valueType

[4] see <https://www.w3.org/XML/Schema>, <https://www.w3.org/TR/xmlschema-2/#built-in-primitive-datatypes>

[5] see: <https://www.w3.org/TR/rdf11-concepts/>

[6] See <https://www.w3.org/TR/rdf11-concepts/#xsd-datatypes>

[7] Corresponds to xs:dateTimeStamp in XML Schema 1.1

[8] see <https://tools.ietf.org/rfc/bcp/bcp47.txt>

Data Specifications

Introduction

A data specification template specifies which additional attributes, which are not part of the metamodel, shall be added to an element instance. Typically, data specification templates have a specific scope. For example, templates for concept descriptions differ from templates for operations, etc. More than one data specification template can be defined and used for an element instance. *HasDataSpecification* defines, which templates are used for an element instance.

[Figure 48](#) shows the concept of data specification for a predefined data specification conformant to IEC61360 [\[1\]](#) that, for example, can be used for concept descriptions for single properties.

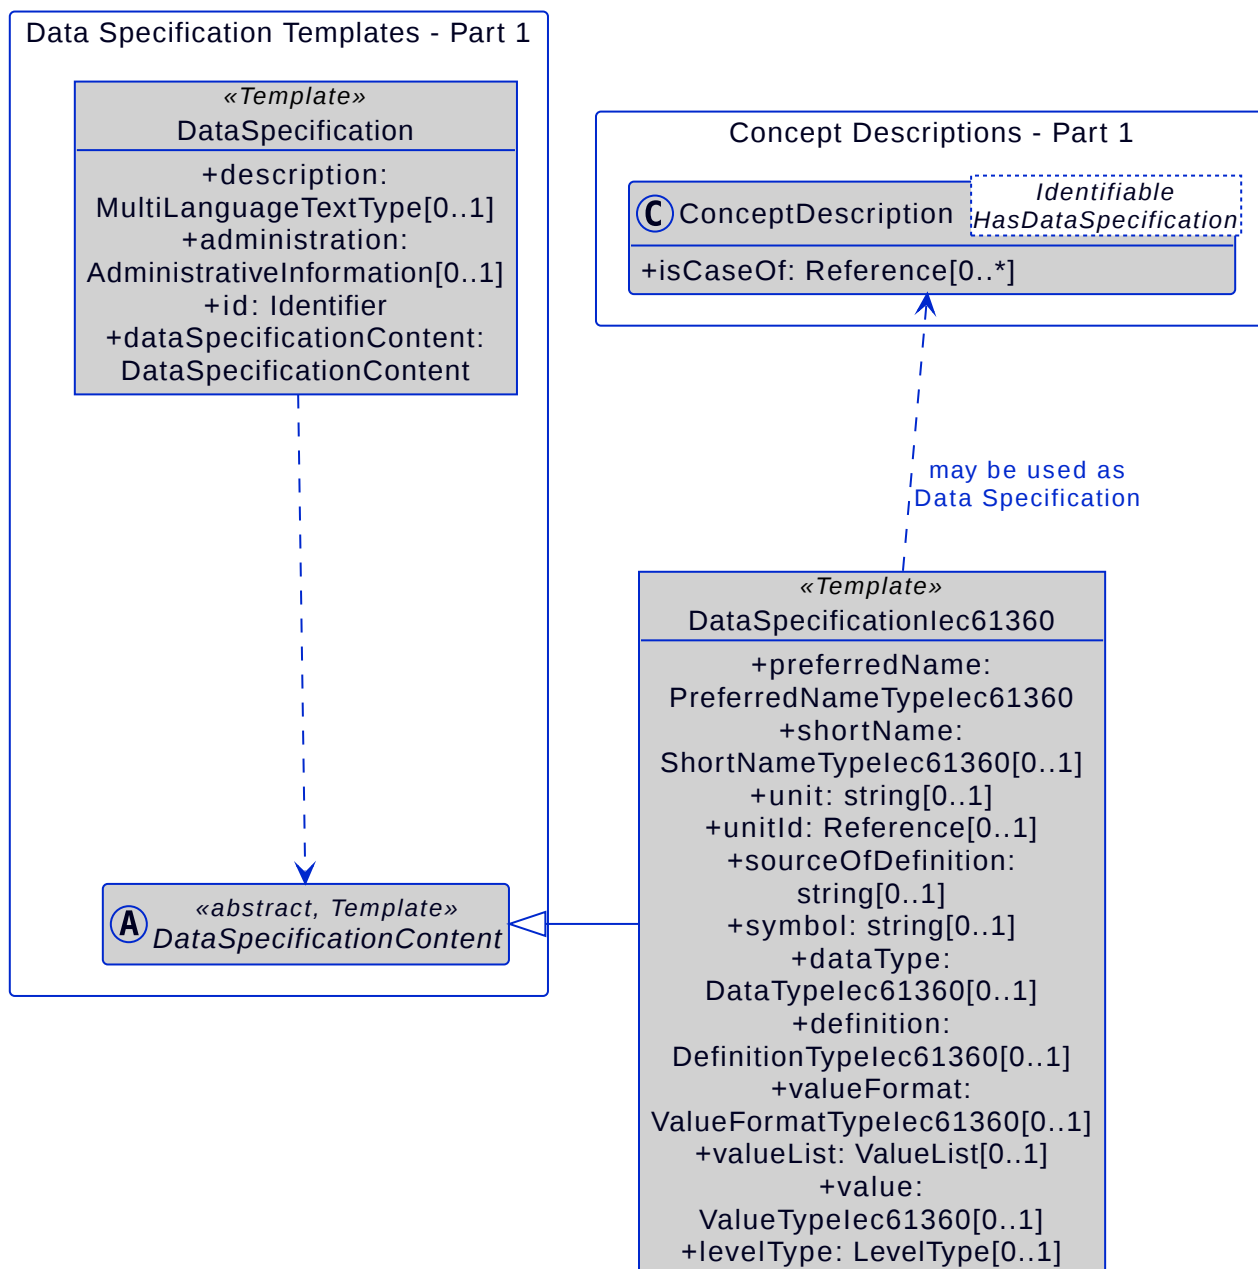


Figure 48. Core Elements of Using Data Specifications (non-normative)

The template introduced to describe the concept of a property, a value list, or a value is based on IEC 61360. [Figure 48](#) also shows how concept descriptions and the predefined data specification templates are related to each other.

Data Specification Template Attributes

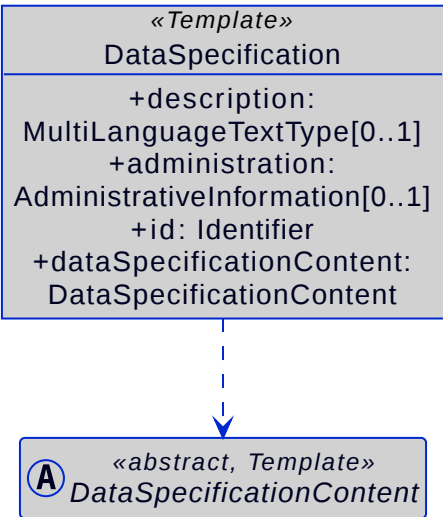


Figure 49. Data Specification Templates

Note: the data specification templates do not belong to the metamodel of the Asset Administration Shell. In serializations that choose specific templates, the corresponding data specification content may be directly incorporated.

Predefined data specification templates including their ID can be found in the Part 3 series (IDTA-01003) of the specification of the Asset Administration Shell.

It is required that a data specification template has a global unique ID so that it can be referenced via [HasDataSpecification/dataSpecification](#).

A template consists of the *DataSpecificationContent* containing the additional attributes to be added to the element instance that references the data specification template, as well as meta information about the template itself. These are two separate classes in UML.

Class:	DataSpecification <<Template>>		
Explanation:	Data specification template		
Inherits from:	—		
ID:	https://admin-shell.io/aas/3/2/DataSpecification		
Attribute	ID		
	Explanation	Type	Card.
description	https://admin-shell.io/aas/3/2/DataSpecification/description		
	Description of how and in which context the data specification template is applicable; can be provided in several languages.	MultiLanguageTextType	0..1

<i>administration</i>	https://admin-shell.io/aas/3/2/DataSpecification/administration		
	Administrative information of the data specification template Note: some of the administrative information like the version number might need to be part of the identification.	AdministrativeInformation	0..1
<i>id</i>	https://admin-shell.io/aas/3/2/DataSpecification/id		
	The globally unique identification of the data specification Note: This identifier is used as value for HasDataSpecification/dataSpecification	Identifier	1
<i>dataSpecificationContent</i>	https://admin-shell.io/aas/3/2/DataSpecification/dataSpecificationContent		
	The content of the template without metadata	DataSpecificationContent	1

Class:	<i>DataSpecificationContent</i> <<Template>><<abstract>>		
Explanation:	Data specification content is part of a data specification template and defines, which additional attributes shall be added to the element instance that references the data specification template and meta information about the template itself.		
Inherits from:	—		
ID:	https://admin-shell.io/aas/3/2/DataSpecificationContent		
Attribute	ID		
	Explanation	Type	Card.

[1] Since the data specification templates are specified and maintained in separate documents, these templates are considered as examples only, although there is a similarity to existing data specifications.

Mappings (normative)

Technical Data Formats

This document specifies the Asset Administration Shell in a technology-neutral format, UML. Different data formats are used or recommended to be used in the different life cycle phases of a product^[4].

The Asset Administration Shell supports three widely used formats:

- XML
- JSON
- RDF

Note: the schemata for XML, JSON and RDF are part of <https://github.com/admin-shell-io/aas-specs-metamodel/tree/master>.

Content Format Types

For different use case scenarios different formats are suitable to fulfill the needs. Besides technical formats like JSON and XML also different content formats are available.

Table 6. Format Types

Format	Explanation
Normal	The standard serialization of the model element or child elements is applied.
Metadata	Only metadata of an element or child elements is returned; the value is not.
Value	Only the raw value of the model element or child elements is returned; it is commonly referred to as <i>ValueOnly</i> -serialization.
Reference	Only applicable to Referables. Only the reference to the found element is returned; potential child elements are ignored.
Path	Returns the idShort of the requested element and a list of idShortPath to child elements if the requested element is a Submodel, a SubmodelElementCollection, a SubmodelElementList, a AnnotatedRelationshipElement, or an Entity.

Encoding

Blobs require the following encoding: base64 string.

Text Serialization of Values of Type "Reference"

Grammar for Text Serialization Type "Reference"

Some mappings or serializations convert the type "Reference" into a single string. In this case, the following serialization is required:

Grammar:

```
<Reference> ::= "[" <ReferenceType> [ "-" <referredSemanticId> "-" ] "]" <Key> {(" ", "  
<Key> ")*
```

```

<ReferenceType> ::= "ExternalRef" | "ModelRef"      value of AAS:Reference/type

<referredSemanticId> ::= <SemanticId>      value of AAS:Reference/referredSemanticId      value
of AAS:Reference/referredSemanticId

<SemanticId> ::= "[" <ReferenceType> "]" <Key> {(" " <Key> }*

<Key> ::= "(" <KeyType> ")" <KeyValue>

<KeyType> ::= value of AAS:Key/type

<KeyValue> ::= value of AAS:Key/value

```

Note 1: an IRI may also contain special symbols like "(", ",", and "[". A blank is added before the new key or value to distinguish beginning and end of a new key.

Note 2: *ReferenceType* is optional. It is clear from the first key in the key chain whether the reference is a global or a model reference. Most examples in this document therefore do not use this prefix.

Examples for Text Serialization Type "Reference"

Valid Examples for External References:

```

(GlobalReference)0173-1#02-BAA120#008

[ExternalRef](GlobalReference)0173-1#02-BAA120#008

(GlobalReference)https://example.com/specification.html (FragmentReference)Hints

```

Valid Examples for Model References:

```

(ConceptDescription)0173-1#02-BAA120#008

[ModelRef](ConceptDescription)0173-1#02-BAA120#008

(Submodel)https://example.com/aas/1/1/1234859590, (Property)Temperature

(Submodel)https://example.com/aas/1/1/1234859590, (SubmodelElementList)Documents,
(SubmodelElementCollection)0, (MultiLanguageProperty)Title

[ModelRef- 0173-1#02-BAA120#008 -](Submodel)https://example.com/aas/1/1/1234859590,

```

In the last example the [semanticId](#) of the property with idShort "Temperature" is expected to be "0173-1#02-BAA120#008", the [referredSemanticId](#).

For further examples including invalid examples please see [Constraints for Referencing in Asset Administration Shells](#).

Embedded Data Specifications

The document series "Specification Asset Administration Shell" predefines data specifications that can be used within an Asset Administration Shell to ensure interoperability (see Part 3 documents).

Consequently, some serializations or mappings support exactly the data descriptions defined in this specification, although the metamodel as such is more flexible and would also support proprietary data specifications.

In the case of restricted use of data specifications, we speak of "embedded data specifications". [Figure 50](#) explains the realization: instead of a set of external global references to externally defined data specifications, a set of pairs consisting of an external global reference to a data specification and the data specification content itself are directly "embedded". Here, the data specification content belongs to the schema, while the data specification including its content are not part of the schema in the general concept.

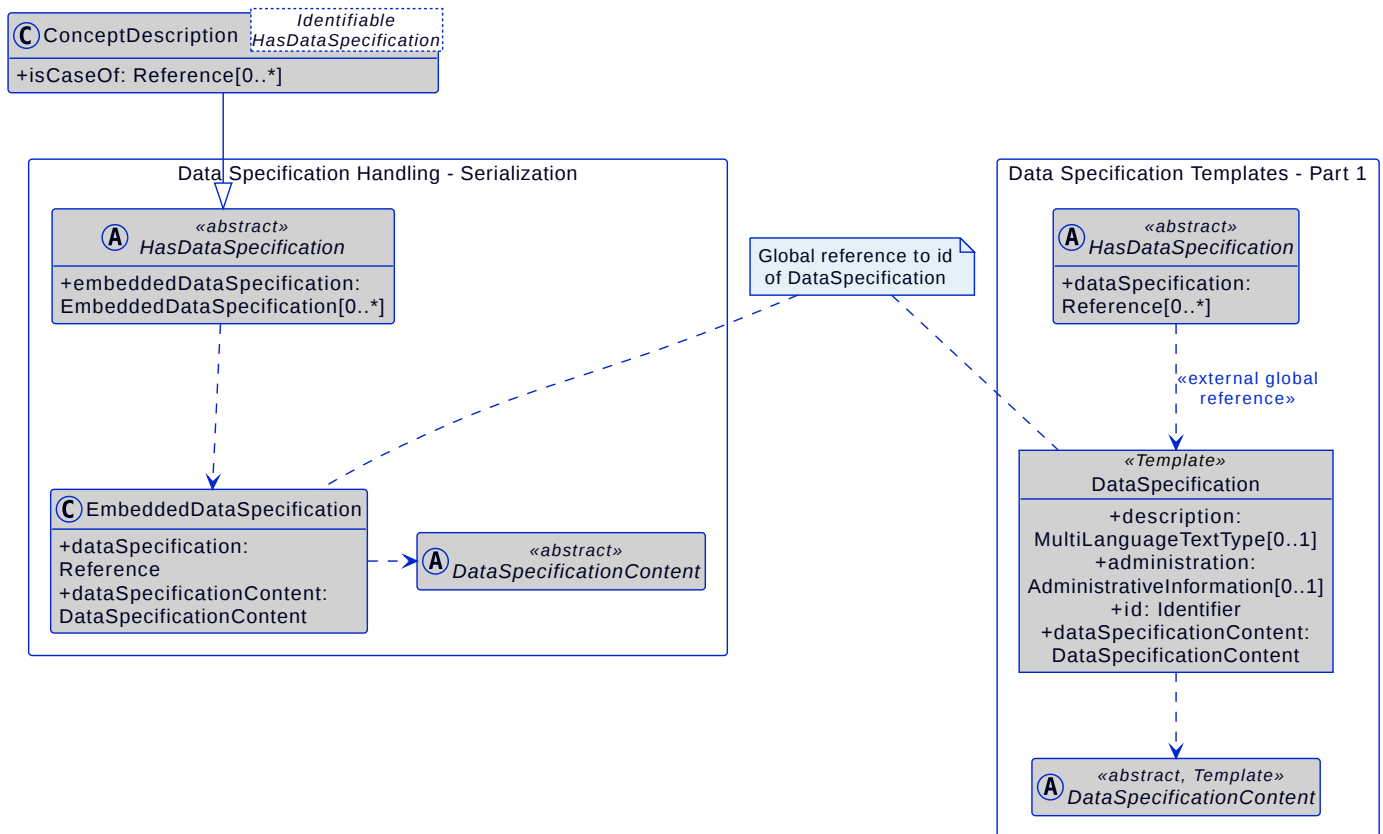


Figure 50. Realization of Embedded Data Specifications

Format "Metadata" (Metadata-Serialization)

Metadata objects are defined for scenarios where a client only wants to access the metadata of an object, but not the value. Metadata objects are used to reduce the payload response to a minimum and to avoid the recursive traversing through the data model when not needed. In many cases, a client is not interested in each child element or value of a resource, but only in the resource itself.

A metadata object does not contain any additional fields in relation to its full object representation, only some fields are left off. The left off fields are fields which could be requested by an own API call and may consist of a recursive or potentially large substructure. The serialization of a metadata object is the same as for the original full object, but without the left off fields.

For elements in the metamodel that are not listed in the table no "Metadata"-serialization is available.

Table 7. Metadata Attributes

Class Name	Fields not available in metadata representation
Identifiabiles	
AssetAdministrationShell	assetInformation, submodels
Submodel	submodelElements
SubmodelElements	
SubmodelElementCollection	value
SubmodelElementList	value
Entity	statements, globalAssetId, specificAssetId
BasicEventElement	observed
Capability	—
Operation	—
DataElements	
Property	value, valueId
MultilanguageProperty	value, valueId
Range	min, max
ReferenceElement	value
RelationshipElement	first, second
AnnotatedRelationshipElement	first, second, annotations
Blob	value, contentType
File	value, contentType

Example

The example shows a JSON serialization of an AssetAdministrationShell object in its full representation and how it looks like in a metadata representation.

Note: for editorial reasons, some fields which are the same for both representations are omitted.

Table 8. AssetAdministrationShell JSON Serialization Example

```
{
  "idShort": "TestAssetAdministrationShell",
  "description": [...],
  "id": "idTestAAS",
  ...
  "derivedFrom": {...},
  "assetInformation": {...},
  "submodels": [...]
}
```

Table 9. AssetAdministrationShell Metadata JSON Serialization Example

```
{
  "idShort": "TestAssetAdministrationShell",
  "description": [...],
  "id": "idTestAAS",
  ...
  "derivedFrom": {...}
}
```

Format "Value" (Value-Only Serialization) in JSON

Overview of Value-Only Serialization Attributes

In many cases, applications using data from Asset Administration Shells already know the Submodel regarding its structure, attributes, and semantics. Consequently, there is not always a need to receive the entire model information, which can be requested separately via *Content* modifier set to *Metadata* (see IDTA-01002), in each request since it is constant most of the time. Instead, applications are most likely only interested in the values of the modelled data. Furthermore, having limited processing power or limited bandwidth, one use case of this format is to transfer data as efficiently as possible. Semantics and data might be split into two separate architecture building blocks. For example, a database would suit the needs for querying semantics, while a device would only provide the data at runtime. Two separate requests make it possible to build up a user interface (UI) and show new upcoming values highly efficiently.

Values are only available for

- All subtypes of abstract type [DataElement](#),
- [SubmodelElementList](#) and [SubmodelElementCollection](#) resp. for their included [SubmodelElements](#),
- [ReferenceElement](#),
- [RelationshipElement](#) + [AnnotatedRelationshipElement](#),
- [Entity](#),
- [BasicEventElement](#),
- [Submodel](#).

[Capabilities](#) and [Operations](#) are excluded from the serialization scope since only data containing elements are in the focus. They are consequently omitted in the serialization.

Abstract SubmodelElements are not contained in payload.

The following rules shall be adhered to when serializing a submodel, a SubmodelElement collection or a

SubmodelElement list with the format "Value"^[2]:

- A Submodel or a SubmodelElement collection is serialized as an unnamed JSON object.
- A SubmodelElement list is serialized as an JSON array.
- A SubmodelElement is considered a leaf SubmodelElement if it does not contain other SubmodelElements. A leaf SubmodelElement follows the rules for the different SubmodelElements considered in the serialization, as described below. If it is not a leaf element, the serialization rules must be transitively followed until the value is a leaf SubmodelElement.
- [Reference](#) is serialized in format "Normal".
- [SpecificAssetId](#) is serialized in format "Normal".
- [SubmodelElements](#) without a value are not serialized.
- For each SubmodelElement within the submodel, the SubmodelElement collection or SubmodelElement list:
 - [Property](#) is serialized as `${Property/idShort}: ${Property/value}` where `${Property/value}` is the JSON serialization of the respective property's value in accordance with the data type to value mapping (see [Table 10](#)).
 - [MultiLanguageProperty](#) is serialized as named JSON object with `${MultiLanguageProperty/idShort}` as the name of the containing JSON property. The JSON object contains an array of JSON objects for each language of the *MultiLanguageProperty* with the language as name and the corresponding localized string as value of the respective JSON property. The language name is defined as two chars according to ISO 639-1.
 - [Range](#) is serialized as named JSON object with `${Range/idShort}` as the name of the containing JSON property. The JSON object contains two JSON properties. The first is named "min". The second is named "max". Their corresponding values are `${Range/min}` and `${Range/max}`.
 - [File](#) and [Blob](#) are serialized as named JSON objects with `${File/idShort}` or `${Blob/idShort}` as the name of the containing JSON property. The JSON object contains two JSON properties. The first refers to the content type named `${File/contentType}` resp. `${Blob/contentType}`. The latter refers to the value named "value" `${File/value}` resp. `${Blob/value}`. The resulting ValueOnly object is indistinguishable whether it contains File or Blob attributes. Therefore, the receiver needs to take the type of the target resource into account. Since the receiver knows in advance if a File or a Blob SubmodelElement shall be manipulated, it can parse the transferred Value-Only object accordingly as a File or Blob object.
 - [SubmodelElementCollection](#) is serialized as named JSON object with `${SubmodelElementCollection/idShort}` as the name of the containing JSON property. The elements contained within the struct, i.e. the elements in `SubmodelElementCollection/value`, are serialized according to their respective type with `${SubmodelElement/idShort}` as the name of the containing JSON property.
 - [SubmodelElementList](#) is serialized as a named JSON array with `${SubmodelElementList/idShort}` as the name of the containing JSON property. The elements in the JSON array, i.e. the elements in `SubmodelElementList/value`, are the ValueOnly serializations of the elements contained in the SubmodelElementList while preserving the order, i.e. index n in the JSON array is the ValueOnly serialization of the element at index n of the SubmodelElementList.
 - [ReferenceElement](#) is serialized as `${ReferenceElement/idShort}: ${ReferenceElement/value}` where `${ReferenceElement/value}` is the serialization of the *Reference* class in format "Normal" (see above).
 - [RelationshipElement](#) is serialized as named JSON object with `${RelationshipElement/idShort}` as the name of the containing JSON property. The JSON object contains two JSON properties. The first is named "first". The second is named "second". Their corresponding values are `${RelationshipElement/first}` resp. `${RelationshipElement/second}`. The values are serialized according to the serialization of a *ReferenceElement* (see above).
 - [AnnotatedRelationshipElement](#) is serialized according to the serialization of a *RelationshipElement* (see above). Additionally, a third named JSON object is introduced with "annotations" as the name of the containing JSON property. The value is `${AnnotatedRelationshipElement/annotations}`. The values of the array items are serialized depending on the type of the annotation data element. Annotations are optional.
 - [Entity](#) is serialized as named JSON object with `${Entity/idShort}` as the name of the containing JSON property. The JSON object contains four JSON properties. The first is named "statements" `${Entity/statements}` and

contains an array of the serialized SubmodelElements according to their respective serialization mentioned in this clause. The second is named "globalAssetId" and the third "specificAssetIds". Either a "globalAssetId" value or a "specificAssetIds" value shall exist. The other attributes are optional. "specificAssetIds" is an array of objects serializing [SpecificAssetId](#). A single *SpecificAssetId* in the array corresponds to the serialization of the *SpecificAssetId* class in format "Normal". The forth property is named "entityType" and contains a string representation of $\{Entity/entityType\}$. *statements* and the *entityType* are optional.

- [BasicEventElement](#) is serialized as named JSON object with $\{BasicEventElement/idShort\}$ as the name of the containing JSON property. The JSON object contains one JSON property named "observed" with the corresponding value of $\{BasicEventElement/observed\}$ as the standard serialization of the *Reference* class.

The following rules shall be adhered to when serializing a single SubmodelElement with the format "Value":

- *Property* is serialized as $\{Property/value\}$ where $\{Property/value\}$ is serialized as described above.
- *MultiLanguageProperty* is serialized as JSON object. The JSON object is serialized as described above.
- *Range* is serialized as JSON object. The JSON object is serialized as described above.
- *File* and *Blob* are serialized as JSON objects. The JSON object is serialized as described above.
- *ReferenceElement* is serialized as $\{ReferenceElement/value\}$ where $\{ReferenceElement/value\}$ is is serialized as described above.
- *RelationshipElement* is serialized as JSON object. The JSON object is serialized as described above.
- *AnnotatedRelationshipElement* is serialized as JSON object. The JSON object is serialized as described above.
- *Entity* is serialized as JSON object. The JSON object is serialized as described above.
- *BasicEventElement* is serialized as JSON object. The JSON object is serialized as described above.

SubmodelElements defined in the Submodel other than the ones mentioned above are not subject to the Value-Only serialization.

Optional elements (like for example globalAssetId for an Entity SubmodelElement) with no value shall be omitted in the serialization.

Note: Elements within a SubmodelElementList are neither optional or mandatory per se. So in Value-Only all elements within a SubmodelElementList shall be displayed even if they are empty (handled as if they are mandatory).

Rationale: index of elements within a SubmodelElementList shall be identical in Normal and Value-Only format.

Data type to value mapping

The serialization of SubmodelElement values is described in the following table. The left column "Data Type" shows the data types which can be used for SubmodelElement values. The data types are defined according to the W3C XML Schema (<https://www.w3.org/TR/xmlschema-2/#built-in-datatypes> and <https://www.w3.org/TR/xmlschema-2/#built-in-derived>). "Value Range" further explains the possible range of data values for this data type. The right column comprises related examples of the serialization of SubmodelElement values.

Table 10. Mapping of Data Types in ValueOnly-Serialization^[9]

	Data Type	JSON Type	Value Range	Sample Values
Core Types	xs:string	string	Character string	"Hello world", "העולם של היום", "היום"

	Data Type	JSON Type	Value Range	Sample Values
	xs:boolean	boolean	true, false	true, false
	xs:decimal	number	Arbitrary-precision decimal numbers	-1.23, 126789672374892739424.543233, 100000.00, 210
	xs:integer	number	Arbitrary-size integer numbers	-1, 0, 126789675432332938792837429837429837429, 100000
IEEE-floating-point numbers	xs:double	number	64-bit floating point numbers	-1.0, -0.0, 0.0, 234.567e8, 234.567e+8, 234.567e-8
	xs:float	number	32-bit floating point numbers	-1.0, -0.0, 0.0, 234.567e8, 234.567e+8, 234.567e-8
Time and data	xs:date	string	Dates (yyyy-mm-dd) with or without time zone	"2000-01-01", "2000-01-01Z", "2000-01-01+12:05"
	xs:time	string	Times (hh:mm:ss.sss...) with or without time zone	"14:23:00", "14:23:00.527634Z", "14:23:00+03:00"
	xs:dateTime	string	Date and time with or without time zone	"2000-01-01T14:23:00", "2000-01-01T14:23:00.66372+14:00"
	xs:dateTimeStamp	string	Date and time with required time zone	"2000-01-01T14:23:00.66372+14:00"
Recurring and partial dates	xs:gYear	string	Gregorian calendar year	"2000", "2000+03:00"
	xs:gMonth	string	Gregorian calendar month	"--04", "--04+03:00"
	xs:gDay	string	Gregorian calendar day of the month	"---04", "---04+03:00"
	xs:gYearMonth	string	Gregorian calendar year and month	"2000-01", "2000-01+03:00"
	xs:gMonthDay	string	Gregorian calendar month and day	"--01-01", "--01-01+03:00"
	xs:duration	string	Duration of time	"P30D", "-P1Y2M3DT1H", "PT1H5M0S"

	Data Type	JSON Type	Value Range	Sample Values
	xs:yearMonthDuration	string	Duration of time (months and years only)	"P10M", "P5Y2M"
	xs:dayTimeDuration	string	Duration of time (days, hours, minutes, seconds only)	"P30D", "P1DT5H", "PT1H5M0S"
Limited-range integer numbers	xs:byte	number	-128...+127 (8 bit)	-1, 0, 127
	xs:short	number	-32768...+32767 (16 bit)	-1, 0, 32767
	xs:int	number	2147483648...+2147483647 (32 bit)	-1, 0, 2147483647
	xs:long	number	-9223372036854775808...+9223372036854775807 (64 bit)	-1, 0, 9223372036854775807
	xs:unsignedByte	number	0...255 (8 bit)	0, 1, 255
	xs:unsignedShort	number	0...65535 (16 bit)	0, 1, 65535
	xs:unsignedInt	number	0...4294967295 (32 bit)	0, 1, 4294967295
	xs:unsignedLong	number	0...18446744073709551615 (64 bit)	0, 1, 18446744073709551615
	xs:positiveInteger	number	Integer numbers >0	1, 7345683746578364857368475638745
	xs:nonNegativeInteger	number	Integer numbers ≥0	0, 1, 7345683746578364857368475638745
	xs:negativeInteger	number	Integer numbers <0	-1, -23487263847628376482736487263847
	xs:nonPositiveInteger	number	Integer numbers ≤0	-1, 0, -93845837498573987498798987394

	Data Type	JSON Type	Value Range	Sample Values
Encoded binary data	xs:hexBinary	string	Hex-encoded binary data	"6b756d6f77617368657265"
	xs:base64Binary	string	base64-encoded binary data	SGVsbG8sIFdvcmxkIQ==
Miscellaneous types	xs:anyURI	string	Absolute or relative URIs and IRIs	"http://customer.com/demo/aas/1/1/1234859590", "urn:example:company:1.0.0"
	rdf:langString	string	Strings with language tags	""Hello'@en", ""Hallo'@de" Note: the examples are written in RDF/Turtle syntax, and only "Hello" and "Hallo" are the actual values.

The following types defined by the XSD and RDF specifications are explicitly omitted for serialization - they are not element of [DataTypeDefXsd](#) or [DataTypeDefRdf](#): xs:language, xs:normalizedString, xs:token, xs:NMTOKEN, xs:Name, xs:NCName, xs:QName, xs:ENTITY, xs:ID, xs:IDREF, xs:NOTATION, xs:IDREFS, xs:ENTITIES, xs:NMTOKENS, rdf:HTML and rdf:XMLLiteral.

Note 1: due to the limits in the representation of numbers in JSON, the maximum integer number that can be used without losing precision is $2^{53}-1$ (defined as Number.MAX_SAFE_INTEGER). Even if the used data type would allow higher or lower values, they cannot be used if they cannot be represented in JSON. Affected data types are unbounded numeric types xs:decimal, xs:integer, xs:positiveInteger, xs:nonNegativeInteger, xs:negativeInteger, xs:nonPositiveInteger and the bounded type xs:unsignedLong. Other numeric types are not affected. ^[3]

Note 2: the ValueOnly-serialization uses JSON native data types, AAS in general uses XML Schema Built-in Datatypes for Simple Data Types and ValueDataType. In case of booleans, JSON accepts only literals true and false, whereas xs:boolean also accepts 1 and 0, respectively. In case of double, JSON number is used in ValueOnly, but JSON number does not support INF/-INF (positive Infinity/negative), which is supported by xs:double. Furthermore, NaN (Not a Number) is also not supported.

(See <https://datatracker.ietf.org/doc/html/rfc8259#section-6>)

Note 3: language-tagged strings (rdf:langString) containing single quotes (') or double quotes (") are not supported.

Note 4: Roundtrip conversion from "Normal" to "ValueOnly" format may not result in the original payload because "Normal" is using string whereas "ValueOnly" is using the JSON type closest to the xsd datatype (see [Table 10](#)).

Example Value-Only serialization for a Submodel

The following example shows the JSON Value-Only serialization for a Submodel with name "Example" and two direct SubmodelElements "ProductClassifications" and "MaxRotationSpeed". "ProductClassifications" is represented by a SubmodelElementList with SubmodelElementCollections as its elements. Each of the SubmodelCollections has two mandatory elements "ProductClassificationSystem" and "ProductClassId" and one optional element "ProductClassificationVersion". All of these elements have data type "xs:string". "MaxRotationSpeed" is a property with data type "xs:int".

```
{ "ProductClassifications":  
  [  
    {  
      "ProductClassificationSystem": "ECLASS",  
      "ProductClassId": "27-01-88-77",  
      "ProductClassificationVersion": "9.0"  
    },  
    {  
      "ProductClassificationSystem": "IEC CDD",  
      "ProductClassId": "0112/2///61987#ABA827#003"  
    }  
  ],  
  "MaxRotationSpeed": 5000  
}
```

The JSON Value-Only serialization for the element "ProductClassifications", a SubmodelElementList, within the Submodel above looks like this:

```
[  
  {  
    "ProductClassificationSystem": "ECLASS",  
    "ProductClassId": "27-01-88-77",  
    "ProductClassificationVersion": "9.0"  
  },  
  {  
    "ProductClassificationSystem": "IEC CDD",  
    "ProductClassId": "0112/2///61987#ABA827#003"  
  }  
]
```

The JSON Value-Only serialization for the first element, a SubmodelElementCollection, within the "ProductClassifications" list above looks like this:

```
{  
  "ProductClassificationSystem": "ECLASS",  
  "ProductClassId": "27-01-88-77",  
  "ProductClassificationVersion": "9.0"  
}
```

The JSON Value-Only serialization for the Property "MaxRotationSpeed" of the Submodel above looks like this:

5000

The Format "Normal" in comparison to this Value-Only serialization of the property "MaxRotationSpeed" would look like this:

```
{
  "idShort": "MaxRotationSpeed",
  "semanticId": {
    "type": "ExternalReference",
    "keys": [
      {
        "type": "GlobalReference",
        "value": "0173-1#02-BAA120#008"
      }
    ]
  },
  "modelType": "Property",
  "valueType": "xs:int",
  "value": "5000"
}
```

Example Value-Only serialization for a SubmodelElementCollection with non-serialized elements

The following SubmodelElementCollection in simplified notation

```
{
myCollection:
{
  "prop1": string,
  "capability1": Capability,
  "operation1": Operation,
  "list": SubmodelElementList(typeofElements:Operation)
}
}
```

is serialized to

```
{
  "prop1": "value of prop1"
}
```

in Format "Value".

Since Capability and Operation are not part of Value-Only serialization they are omitted. Also a List containing elements that are omitted is omitted. This is even the case if the SubmodelElementList is mandatory.

Note: Similar handling is required in case there are access rules disallowing access to specific

SubmodelElements: The protected elements shall not be serialized.

Examples Value-Only serialization for all SubmodelElement types

In the following examples for Value-Only serializations for all SubmodelElement types are given.

Property

For a single *Property* named "MaxRotationSpeed", the value-Only payload is minimized to the following (assuming its value is 5000):

```
5000
```

SubmodelElementCollection

For a *SubmodelElementCollection* named "ProductClassification" or being part of a list "ProductionClassifications", the Value-Only payload is minimized to the following, i.e. the name of the SubmodelElementCollection or its index in the list is not part of the Value-Only serialization:

```
{
  "ProductClassificationSystem": "ECLASS",
  "ProductClassId": "27-01-88-77",
  "ProductClassificationVersion": "9.0"
}
```

SubmodelElementList

For a *SubmodelElementList* named "Authors" with string Properties as its value, the Value-Only payload is minimized to the following (idShort of values within a SubmodelElementList are ignored):^[4]:

```
[
  "Martha",
  "Jonathan",
  "Clark"
]
```

For a *SubmodelElementList* named "ListOfLists" with string SubmodelElementList as its value, the Value-Only payload is minimized to the following (empty lists are included):

```
[
  [ "A" ],
  [],
  [ "B", "C" ]
]
```

MultiLanguageProperty

For a *MultiLanguageProperty* the Value-Only payload is minimized to the following:

```
[
  {"de": "Das ist ein deutscher Bezeichner"},
  {"en": "That's an English label"}
]
```

Range

For a *Range* named "TorqueRange", the Value-Only payload is minimized to the following:

```
{
  "min": 3,
  "max": 15
}
```

ReferenceElement

For a *ReferenceElement* named "MaxRotationSpeedReference", the Value-Only payload is minimized to the following:

```
{
  "type": "ExternalReference",
  "keys": [
    {
      "type": "GlobalReference",
      "value": "0173-1#02-BAA120#008"
    }
  ]
}
```

File

For a *File* named "Document", the Value-Only payload is minimized to the following:

```
{
  "contentType": "application/pdf",
  "value": "https://myDomain/SafetyInstructions.pdf"
}
```

Blob

For a *Blob* named "Library", there are two possibilities for the Value-Only payload. In case the Blob value - that can be very large - shall not be part of the payload, the payload is minimized to the following^[5]:

```
{
  "contentType": "application/octet-stream"
}
```

In the second case the Blob value is part of the payload.^[6], there is an additional attribute containing the base64-

encoded value:

```
{
  "contentType": "application/octet-stream",
  "value": "VGhpcyBpcyBteSBibG9i"
}
```

RelationshipElement

For a *RelationshipElement* named "CurrentFlowsFrom", the Value-Only payload is minimized to the following:

```
{
  "first": {
    "type": "ModelReference",
    "keys": [
      {
        "type": "Submodel",
        "value": "http://customer.com/demo/aas/1/1/1234859590"
      },
      {
        "type": "Property",
        "value": "PlusPole"
      }
    ]
  },
  "second": {
    "type": "ModelReference",
    "keys": [
      {
        "type": "Submodel",
        "value": "http://customer.com/demo/aas/1/0/1234859123490"
      },
      {
        "type": "Property",
        "value": "MinusPole"
      }
    ]
  }
}
```

AnnotatedRelationshipElement

For an *AnnotatedRelationshipElement* named "CurrentFlowFrom", with an annotated *Property-DataElement* "AppliedRule", the Value-Only-payload is minimized to the following:

```
{
  "first": {
    "type": "ModelReference",
    "keys": [
      {
```

```

        "type": "Submodel",
        "value": "http://customer.com/demo/aas/1/1/1234859590"
    },
    {
        "type": "Property",
        "value": "PlusPole"
    }
]
},
"second": {
    "type": "ModelReference",
    "keys": [
        {
            "type": "Submodel",
            "value": "http://customer.com/demo/aas/1/0/1234859123490"
        },
        {
            "type": "Property",
            "value": "MinusPole"
        }
    ]
},
"annotations": [
    {
        "AppliedRule": "TechnicalCurrentFlowDirection"
    }
]
}

```

Entity

For an *Entity* named "MySubAssetEntity", the Value-Only-payload is minimized to the following:

```

{
    "statements": {
        "MaxRotationSpeed": 5000
    },
    "entityType": "SelfManagedEntity",
    "globalAssetId": {
        "type": "ExternalReference",
        "keys": [
            {
                "type": "GlobalReference",
                "value": "http://customer.com/demo/asset/1/1/MySubAsset"
            }
        ]
    }
}

```

BasicEventElement

For a BasicEventElement named "MyBasicEvent", the Value-Only-payload is minimized to the following:

```
{
  "observed": {
    "type": "ModelReference",
    "keys": [
      {
        "type": "Submodel",
        "value": "http://customer.com/demo/aas/1/1/1234859590"
      },
      {
        "type": "Property",
        "value": "MaxRotation"
      }
    ]
  }
}
```

Value-Only for Invoking of Operations

Although Operations are omitted in Value-Only there is one exception: invoking of operations.

Note: [Operation/inputVariables](#) is renamed to "inputArguments" etc. in the JSON Value-Only Schema.

Same holds for the specification of the invoke operations in IDTA-01002 (InvokeOperationSync and InvokeOperationAsync).

This would be the payload conformant to the metamodel specification as would be used in a Submodel Template Specification:

```
{
  "idShort": "add",
  "inputVariables": [
    {
      "value": {
        "idShort": "arg1",
        "modelType": "Property",
        "valueType": "xs:int"
      }
    },
    {
      "value": {
        "idShort": "arg2",
        "modelType": "Property",
        "valueType": "xs:int"
      }
    }
  ],
  "outputVariables": [
    {
```

```

        "value": {
            "idShort": "out1",
            "modelType": "Property"
            "valueType": "xs:int"
        }
    },
    "modelType": "Operation"
}

```

This would be the payload as defined in the API OpenAPI specification for the invocation of an operation ([InvokeOperationSync](#) with data type [OperationRequest](#)) with idShort "add" in Format "Normal" with input arguments "arg1" and "arg2" of type "xs:int" and a return argument with name "out1" of type "xsd:int":

```

{
  "inputArguments": [
    {
      "value": {
        "idShort": "arg1",
        "modelType": "Property",
        "valueType": "xs:int",
        "value": "5000"
      }
    },
    {
      "value": {
        "idShort": "arg2",
        "modelType": "Property",
        "valueType": "xs:int",
        "value": "2"
      }
    }
  ]
}

```

The operation result would look like this:

```

{
  "outputArguments": [
    {
      "value": {
        "idShort": "out1",
        "modelType": "Property",
        "valueType": "xs:int",
        "value": "5002"
      }
    }
  ]
}

```

Arguments in an operation are handled like a `SubmodelElementCollection`, not like a `SubmodelElementList` because they may differ in type and semantics. The arguments in an operation are not ordered.

When invoking the same operation in Value-Only format the request body would therefore look like this:

```
{
  "inputArguments": {
    "arg1": 5000,
    "arg2": 2
  }
}
```

with return object

```
{
  "outputArguments": {
    "out1": 5002
  }
}
```

JSON-Schema for the Value-Only Serialization

The following JSON-Schema represents the validation schema for the ValueOnly-Serialization of SubmodelElements. This holds true for all SubmodelElements mentioned in the previous clause except for [SubmodelElementCollections](#). Since *SubmodelElementCollections* are treated as objects containing SubmodelElements of any kind, the integration into the same validation schema would result in a circular reference or ambiguous results ignoring the actual validation of SubmodelElements other than *SubmodelElementCollections*. Hence, the same validation schema must be applied for each *SubmodelElementCollection* within a SubmodelElement hierarchy. In this case, it may be necessary to create a specific JSON-Schema for the individual use case. The *SubmodelElementCollection* is added to the following schema for completeness and clarity. It is, however, not referenced from the *SubmodelElementValue-oneOf-Enumeration* due to the reasons mentioned above.

See [Annex ValueOnly-Serialization Example](#) for an example that validates against this schema.

Note: OpenAPI 3.0 does not support patternProperties and propertyNames, OpenAPI 3.1 probably will. This is why this schema is not yet used in the openAPI specifications of the API.

```
{
  "$schema": "https://json-schema.org/draft/2019-09/schema",
  "title": "ValueOnly-Serialization-Schema",
  "$id": "https://admin-shell.io/schema/valueonly/json/V3.0",
  "definitions": {
    "AnnotatedRelationshipElementValue": {
      "type": "object",
      "properties": {
        "first": {
          "$ref": "#/definitions/ReferenceValue"
        },
        "second": {
          "$ref": "#/definitions/ReferenceValue"
        }
      }
    }
  }
}
```

```

    },
    "annotations": {
      "$ref": "#/definitions/ValueOnly"
    }
  },
  "additionalProperties": false
},
"BasicEventElementValue": {
  "type": "object",
  "properties": {
    "observed": {
      "$ref": "#/definitions/ReferenceValue"
    }
  },
  "required": [
    "observed"
  ],
  "additionalProperties": false
},
"BlobValue": {
  "type": "object",
  "properties": {
    "contentType": {
      "type": "string",
      "minLength": "1",
      "maxLength": "128"
    },
    "value": {
      "type": "string",
      "minLength": 1
    }
  },
  "additionalProperties": false
},
"BooleanValue": {
  "type": "boolean",
  "additionalProperties": false
},
"EntityValue": {
  "type": "object",
  "properties": {
    "statements": {
      "$ref": "#/definitions/ValueOnly"
    },
    "entityType": {
      "enum": [
        "SelfManagedEntity",
        "CoManagedEntity"
      ]
    }
  },
  "globalAssetId": {
    "type": "string"
  }
}

```

```

    },
    "specificAssetIds": {
      "type": "array",
      "items": {
        "$ref": "#/definitions/SpecificAssetIdValue"
      }
    }
  },
  "additionalProperties": false
},
"FileValue": {
  "type": "object",
  "properties": {
    "contentType": {
      "type": "string",
      "minLength": "1",
      "maxLength": "128"
    },
    "value": {
      "type": "string",
      "minLength": "1",
      "maxLength": "2048"
    }
  },
  "additionalProperties": false
},
"Identifier": {
  "type": "string"
},
"Key": {
  "type": "object",
  "properties": {
    "type": {
      "type": "string"
    },
    "value": {
      "type": "string"
    }
  },
  "required": [
    "type",
    "value"
  ],
  "additionalProperties": false
},
"LangString": {
  "type": "object",
  "patternProperties": {
    "^[a-z]{2,4}(-[A-Z][a-z]{3})?(-([A-Z]{2}|[0-9]{3}))?$": {
      "type": "string"
    }
  }
},

```

```

    "additionalProperties": false
  },
  "MultiLanguagePropertyValue": {
    "type": "array",
    "items": {
      "$ref": "#/definitions/LangString"
    },
    "additionalProperties": false
  },
  "NumberValue": {
    "type": "number",
    "additionalProperties": false
  },
  "OperationRequestValueOnly": {
    "inoutputArguments": {
      "$ref": "#/definitions/ValueOnly"
    },
    "inputArguments": {
      "$ref": "#/definitions/ValueOnly"
    },
    "timestamp": {
      "type": "string",
      "pattern": "^-?(([1-9][0-9][0-9][0-9]+)|(0[0-9][0-9][0-9]))-((0[1-9])|(1[0-2]))-((0[1-9])|([12][0-9])|(3[01]))T((((0[1][0-9])|(2[0-3])):[0-5][0-9]:([0-5][0-9])(\\.([0-9]+)?)|24:00:00(\\.0+)?)(Z|\\+00:00|-00:00))$"
    },
    "additionalProperties": false
  },
  "OperationResultValueOnly": {
    "executionState": {
      "type": "string",
      "enum": ["Initiated", "Running", "Completed", "Canceled", "Failed", "Timeout"]
    },
    "inoutputArguments": {
      "$ref": "#/definitions/ValueOnly"
    },
    "outputArguments": {
      "$ref": "#/definitions/ValueOnly"
    },
    "additionalProperties": false
  },
  "PropertyValue": {
    "oneOf": [
      {
        "$ref": "#/definitions/StringValue"
      },
      {
        "$ref": "#/definitions/NumberValue"
      },
      {
        "$ref": "#/definitions/BooleanValue"
      }
    ]
  }
}

```

```

    }
  ]
},
"RangeValue": {
  "type": "object",
  "properties": {
    "min": {
      "$ref": "#/definitions/RangeValueType"
    },
    "max": {
      "$ref": "#/definitions/RangeValueType"
    }
  },
  "additionalProperties": false
},
"RangeValueType": {
  "oneOf": [
    {
      "$ref": "#/definitions/StringValue"
    },
    {
      "$ref": "#/definitions/NumberValue"
    },
    {
      "$ref": "#/definitions/BooleanValue"
    }
  ]
},
"ReferenceElementValue": {
  "$ref": "#/definitions/ReferenceValue"
},
"ReferenceValue": {
  "type": "object",
  "properties": {
    "referredSemanticId": {
      "$ref": "#/definitions/ReferenceValue"
    },
    "type": {
      "type": "string",
      "enum": ["ModelReference", "ExternalReference"]
    },
    "keys": {
      "type": "array",
      "items": {
        "$ref": "#/definitions/Key"
      }
    }
  },
  "additionalProperties": false
},
"RelationshipElementValue": {
  "type": "object",

```

```

    "properties": {
      "first": {
        "$ref": "#/definitions/ReferenceValue"
      },
      "second": {
        "$ref": "#/definitions/ReferenceValue"
      }
    },
    "additionalProperties": false
  },
  "SpecificAssetIdValue": {
    "type": "object",
    "patternProperties": {
      "(.*?)": {
        "type": "string"
      }
    }
  },
  "StringValue": {
    "type": "string",
    "additionalProperties": false
  },
  "SubmodelElementCollectionValue": {
    "$ref": "#/definitions/ValueOnly"
  },
  "SubmodelElementListValue": {
    "type": "array",
    "items": {
      "$ref": "#/definitions/SubmodelElementValue"
    }
  },
  "SubmodelElementValue": {
    "oneOf": [
      {
        "$ref": "#/definitions/BasicEventElementValue"
      },
      {
        "$ref": "#/definitions/RangeValue"
      },
      {
        "$ref": "#/definitions/MultiLanguagePropertyValue"
      },
      {
        "$ref": "#/definitions/FileBlobValue"
      },
      {
        "$ref": "#/definitions/ReferenceElementValue"
      },
      {
        "$ref": "#/definitions/RelationshipElementValue"
      }
    ]
  }

```

```

        "$ref": "#/definitions/AnnotatedRelationshipElementValue"
      },
      {
        "$ref": "#/definitions/EntityValue"
      },
      {
        "$ref": "#/definitions/PropertyValue"
      },
    ],
    {
      "$ref": "#/definitions/SubmodelElementCollectionValue"
    },
    {
      "$ref": "#/definitions/SubmodelElementListValue"
    }
  ],
  "ValueOnly": {
    "propertyNames": {
      "pattern": "^[A-Za-z_][A-Za-z0-9_-]*$"
    },
    "patternProperties": {
      "^[A-Za-z_][A-Za-z0-9_-]*$": {
        "$ref": "#/definitions/SubmodelElementValue"
      }
    }
  },
  "additionalProperties": false
}
}
}

```

Format "Path" (idShortPath Serialization) in JSON

To get only the idShortPaths of a SubmodelElement hierarchy, the serialization format is specified in terms of an idShortPath notation to be returned in an JSON array. The notation differs depending on whether a [SubmodelElementCollection](#) or a [SubmodelElementList](#) is present. In the first case, the SubmodelElement's [idShort](#) is separated by "." (dot) from top level down to child level. In the second case, square brackets with an index "<Index>" are appended after the idShort of the containing SubmodelElementList. In any case, the first item of any idShortPath is the idShort of the requested element.

Note: Although idShort may be defined for elements within a SubmodelElementList, only the index shall be used within the idShortPath serialization.

Grammar:

```

<idShortPath> ::= <idShort> { [ "." <idShort> | "["<Index>"]" ] }*

<Index> ::= <Zero> | <PositiveNumber>

<PositiveNumber> ::= <NonZeroDigit>{<Digit>}*
<Digit> ::= <Zero> | <NonZeroDigit>
<Zero> ::= "0"

```

```
<NonZeroDigit> ::= "1" | "2" | "3" | "4" | "5" | "6" | "7" | "8" | "9"
```

In the following example, a request for idShort paths targeting a *MySubmodelElementCollection* with *SerializationModifier* level = deep, the list of idShort paths is returned as follows:

EXAMPLE Submodel

Submodel: MySubmodel

- Property: MyTopLevelProperty
- SMC: MySubmodelElementCollection
 - Property: MySubProperty1
 - Property: MySubProperty2
 - SMC: MySubSubmodelElementCollection
 - Property: MySubSubProperty1
 - Property: MySubSubProperty2
 - SML: MySubSubmodelElementList1
 - Property: "MySubTestValue1"
 - Property: "MySubTestValue2"
 - SML: MySubSubmodelElementList2
 - SML: MySubSubmodelElementList3
 - SMC: MySubmodelElementCollectionInSML3
 - Property: "MySubTestValue3"
 - SML: MySubSubmodelElementList3
 - SMC: MySubmodelElementCollection2InSML3
 - Property: "MySubTestValue3"

idShortPaths for SMC MySubmodelElementCollection within the Submodel above:

```
[  
  "MySubmodelElementCollection",  
  "MySubmodelElementCollection.MySubProperty1",  
  "MySubmodelElementCollection.MySubProperty2",  
  "MySubmodelElementCollection.MySubmodelElementCollection",  
  "MySubmodelElementCollection.MySubmodelElementCollection.MySubProperty1",  
  "MySubmodelElementCollection.MySubmodelElementCollection.MySubProperty2",  
  "MySubmodelElementCollection.MySubSubmodelElementList1",  
  "MySubmodelElementCollection.MySubSubmodelElementList1[0]",  
  "MySubmodelElementCollection.MySubSubmodelElementList1[1]",  
  "MySubmodelElementCollection.MySubSubmodelElementList2",  
  "MySubmodelElementCollection.MySubSubmodelElementList2[0]",  
  "MySubmodelElementCollection.MySubSubmodelElementList2[0][0]",  
  "MySubmodelElementCollection.MySubSubmodelElementList2[0][1]",  
  "MySubmodelElementCollection.MySubSubmodelElementList2[0][0].MySubTestValue3",  
  "MySubmodelElementCollection.MySubSubmodelElementList2[0][1].MySubTestValue3"  
]
```

]

"MySubmodelElementCollection.MySubSubmodelElementList1" has exactly 2 values in this example and "MySubmodelElementCollection.MySubSubmodelElementList2" has 1 element in the first row and two in the second row.

Note: There is no idShortPath for [Identifiable](#) because idShort is optional for Identifiables.

Format "Reference"

In some use cases only the (model) reference to the object is needed in the first place.

References are possible for Referables, only. Potential child elements are ignored.

For references see [\[spec-metamodel::referencing::referencing-in-aas\]](#).

Format "Reference" - Example in JSON

```
{
  "keys": [
    {
      "type": "AssetAdministrationShell",
      "value": "urn:an-example08:f3f73640"
    }
  ],
  "type": "ModelReference"
}
```

Format "Normal" in XML

The metamodel of an Asset Administration Shell needs to be serialized for import and export scenarios. XML is a possible serialization format.

eXtensible Markup Language (XML^[7]) is very well suited to derive information from an IT system, e.g. to process it manually and then feed it into another IT system. XML provides the possibilities of scheme definitions, which can be used to syntactically validate the represented information in each step.

While there are many possibilities to represent a model of an Asset Administration Shell in XML, we provide our "official" XML schema definition ([XSD](#)) to foment interoperability between different tools and systems.

Below we explain in more detail how our schema is constructed, point the user to the examples and finally give some background information on our particular schema design.

Note 1: the xml schema (.xsd files) is maintained in the repository "aas-specs" of the GitHub project admin-shell-io [\[51\]](#) in folder [schemas/xml](#)

Note 2: example files can be found in the repository "aas-specs" in the GitHub project admin-shell-io [\[51\]](#) in folder : [schemas/xml/examples](#)

Top-Level Structure

The root element of our XML is an XML element representing the instance of [Environment](#). This environment contains three aggregations, corresponding to all [Identifiable](#) classes:

- [AssetAdministrationShell](#)'s,
- [Submodel](#)'s, and
- [ConceptDescription](#)'s.

To simplify exploration of the XML data, identifiable instances are only available at the level of the environment, and nowhere else.

We now continue to see how to serialize the instances and their properties.

XML Mapping Rules

Building blocks of an XML document include only [XML elements](#), [XML attributes](#) and [text enclosed in an element](#). XML elements can nest children elements. Using these building blocks, we map an AAS model to XML.

UML Property to XML Element

Before we look into how to represent instances of classes, let us start bottom-up and see first how individual properties are represented.

We represent each property of a class with an XML element whose name corresponds to the property in the metamodel. The name is given in camel-case where all abbreviations are left as capitalized (dataSpecificationIec61360 instead of dataSpecificationIEC61360).

It is common in UML to use singular form for aggregations, which is the case for the metamodel. This is, however, in contrast to programming code, where plural form for sequences is common. Since the naming of XML elements has direct influence on the programming code, we name the properties in plural form diverging from the name in the metamodel. For example, submodelElements instead of submodelElement in case of [Submodel/submodelElement](#) property in the metamodel.

In cases where plural form made no sense for a property, we kept it as-is in singular form (e.g., isCaseOf). The full list of exceptions is available [as code in aas-core-meta](#).

Why no XML attributes?

While some metamodel properties are indeed very apt to be succinctly represented as XML attributes, we decided *not* to use XML attributes at all for three reasons.

First, the XML attribute must be a string, and therefore does not allow for structured data to be represented with it. As the metamodel evolves, we need to be able to gracefully evolve the schema with as little breakages as possible. An XML attribute puts a limit in so far that an attribute can only be represented as string. Moreover, as the schema evolves, making [diff](#)'s is important to trace the changes. This is much harder when the attributes switch from an XML attribute to an XML element.

Second, many classes contain a mix of primitive properties and structured properties. If we allowed XML attributes, the former would be represented as XML attributes, while the latter would be represented as XML elements. This leads to confusion where the writer is forced to go back and forth in the specification, and always double-check whether a property should be represented as an XML attribute or an XML element.

Third, we automatically generate the schema from a machine-readable metamodel representation (see [Background](#) below). The mix of XML attributes and elements would have complicated the code and prolonged the development.

We finally decided that the drawbacks outlined above outweighed the advantage in form of succinct representation.

Optional Properties

If a property has cardinality 0..1 or 0..* and is not specified in the instance, the element is simply omitted.

Properties of Simple Data Types

The property values given in the metamodel as simple data types (see [Primitive Data Types](#)) are serialized as text enclosed in the XML element corresponding to the property. Please see [Why no XML attributes?](#) on why we do not serialize them as XML attributes.

The byte arrays (BlobType in metamodel) are serialized as Base64-encoded text.

Simple type `rdf:langString` is serialized as if it were a proper metamodel class with properties `language` and `text`. See the following [Instances of Classes as Property Values](#) about how to serialize instances of classes in general as that section directly applies to `rdf:langString`.

Instances of Classes as Property Values

To serialize instances of metamodel classes as values of properties, we need to nest them somehow within the XML element corresponding to the property. This is not as trivial as it seems.

If the property type is a concrete or abstract class with descendants, the deserializer needs to know the exact concrete class at the time of de-serialization. However, this information is obviously missing in the metamodel. For example, the property [Submodel/submodelElement](#) tells the deserializer that its items are instances of [SubmodelElement](#), but the deserializer does not know which *concrete* deserialization method to apply to understand the nested XML data: is it [Property](#), [Range](#) or some other descendant of [SubmodelElement](#)?

Therefore, the information about the concrete type of the serialized instance must be encoded somehow in XML when the type in the metamodel is too vague. This nugget of information is usually called a *discriminator* (e.g., see [OpenAPI 3 specification on polymorphism](#)).

On the other hand, when the metamodel mandates the type of property as a concrete class without descendants, the deserializer needs no additional information as the deserialization method is given by the metamodel. There is thus no need to include the discriminator in the serialization, and a redundant discriminator would only clutter the XML document.

We therefore distinguish two serializations of instances: one with discriminator, and one without, respectively.

Instances Serialized with Discriminator

We use the XML element named according to the concrete class at the serialization as the discriminator. The properties of the instance are nested below this discriminator XML element.

Let us make an example. The example will be agnostic of the particular metamodel version, so that it can age well across different versions. We fantasize a metamodel class `SomeAbstractClass` and assume it has two descendant classes, `SomeConcreteClass` and `AnotherConcreteClass`. Let us assume yet another class, `YetAnotherClass`, entails the property `someProperty` of type `SomeAbstractClass`.

Here is how the XML structure corresponding to `YetAnotherClass/someProperty` would look like in this fantasized case, where the value is an instance of `SomeConcreteClass`:

```
<someProperty>
  <SomeConcreteClass>
    <!--
      Serialized properties of SomeConcreteClass
    -->
  </SomeConcreteClass>
```

```
</someProperty>
```

If the value is an instance of `AnotherConcreteClass`, the serialization becomes:

```
<someProperty>
  <AnotherConcreteClass>
    <!--
      Serialized properties of AnotherConcreteClass
    -->
  </AnotherConcreteClass>
</someProperty>
```

The abstract class, `SomeAbstractClass`, does not show up in the serialization at all, as it is redundant information.

While this approach is succinct in terms of additional XML elements, but it comes with a caveat. Namely, if we introduce descendants to `AnotherConcreteClass`, the property `someProperty` becomes polymorph, and we need to introduce backwards-incompatible schema changes to allow for the [discriminator].

Instances Serialized without Discriminator

If the concrete type of the property at deserialization is unambiguous by the metamodel, we omit the discriminator to reduce the clutter. The instance is simply serialized as a sequence of XML elements corresponding to its properties.

Let us fantasize yet another example, similar to the one in [Instances of Classes as Property Values](#). We will again draw an example such that it is agnostic of metamodel version for better evolution of this document. Assume a class `SomeClass` with a property `SomeClass/someProperty`. Now imagine the type of `someProperty` to be the class `AnotherClass`. The class `AnotherClass` has properties `AnotherClass/anotherProperty` and `AnotherClass/yetAnotherProperty`. The class `AnotherClass` has no descendants, so the concrete type of `SomeClass/someProperty` is unambiguous.

Here is how the XML structure would look like:

```
<someProperty>
  <anotherProperty>
    <!-- ... -->
  </anotherProperty>
  <yetAnotherProperty>
    <!-- ... -->
  </yetAnotherProperty>
</someProperty>
```

The type information about `AnotherClass` is omitted, as the type of the `SomeClass/someProperty` is fixed in the metamodel.

Properties as Aggregations

Many properties in the metamodel do not represent a single value (be it primitive or structured as a class), but aggregate instances of metamodel classes. For example, [Submodel/submodelElement](#) aggregates instances of [SubmodelElement](#)'s.

If we just concatenated all the properties of the instances, we would not know which property belongs to which instance (or such distinction would be complicated). We need a delimiter!

Following the approach described in [Instances Serialized with Discriminator](#), we delimit the instances simply by nesting them beneath the discriminator elements. If the type of the list items is a concrete class, we nest beneath the discriminator element regardless.

For example, here is an XML snippet of an example SubmodelElements, where the first element is a [Property](#), the second one is a [Range](#) and the third is a [Property](#):

```
<submodel>
  <submodelElements>
    <!-- First element -->
    <property>
      <!-- ... some properties ... -->
    </property>

    <!-- Second element -->
    <range>
      <!-- ... another properties ... -->
    </range>

    <!-- Third element -->
    <property>
      <!-- ... yet another properties ... -->
    </property>
  </submodelElements>
</submodel>
```

We explicitly forbid empty lists in XML to avoid confusion about properties of cardinality 0..*. Namely, an empty list is semantically equal to an omitted property (according to the metamodel). Thus, the XML element representing an aggregation must be omitted if the aggregation is empty.

The following snippet is therefore invalid:

```
<submodel>
  <submodelElements/>
  <!-- other properties -->
</submodel>
```

... and should be written as:

```
<submodel>
  <!-- other properties -->
</submodel>
```

Order of the Properties

We fixed the order of the properties to match the metamodel for readability.

This is reflected in usage of `xs:sequence` throughout the XML schema.

Enumerations

Enumerations are serialized according to the exact values of enumeration literals in the metamodel as text.

For example, the enumeration literal [EntityType/CoManagedEntity](#) is serialized as `CoManagedEntity`, while the literal [Direction/input](#) as `input`.

Embedded Data Specifications

There is an abstract definition of data specifications as templates in the metamodel (see [Data Specification Templates](#)). This definition does not specify, though, how to access them from within an [Environment](#), which is a requirement for many systems. To address this practical issue, the metamodel indicates that they should be embedded in serializations (see [Embedded Data Specifications](#)).

We therefore add additional XML element, named `embeddedDataSpecifications`, in the XML representations of [HasDataSpecification](#) class, and omit `dataSpecification` property by design. The embedded data specifications are serialized just as all the other classes of the metamodel, following the procedure outlined above.

Namespace

The XML elements representing the AAS model are explicitly required to live in our namespace. The namespace corresponds to the version of the metamodel.

For example, the serialization for the metamodel V3.2 lives in the namespace <https://admin-shell.io/aas/3/2>.

Structure of the Schema

XML schemas tend to grow very complex, very quickly. Our schema is no exception. While we described so far how an XML document looks like for a concrete AAS model, let us briefly give you an overview of the schema beneath it.

At this point, we only outline its structure in broad brushes. Please refer to the actual file [schema/xml/AAS.xsd](#) for more details.

For each class, we define a `xs:group` which lays out the order (as a nested `xs:sequence`) and type of the XML elements corresponding to the properties of the class. The inheritance is dealt by nesting an additional `xs:group` element within the sequence with the `ref` attribute.

The individual properties are defined with `xs:element` in the `xs:sequence`.

For example:

```
<xs:group
  name="administrativeInformation">
  <xs:sequence>
    <xs:group
      ref="hasDataSpecification"/>
    <xs:element
      name="version"
      minOccurs="0"
      maxOccurs="1">
      <xs:simpleType>
        <xs:restriction
          base="xs:string">
            <xs:minLength
              value="1"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
  </xs:sequence>
</xs:group>
```

```

        </xs:element>
        <!-- ... More elements come here ... -->
    </xs:sequence>
</xs:group>

```

For each class, we define a `xs:complexType`, name it with an `_t` prefix and refer the complex type to the corresponding group. The complex types are necessary so that we can use them to specify aggregations.

For example, here is the definition of `submodel_t`:

```

<xs:complexType
    name="submodel_t">
    <xs:sequence>
        <xs:group
            ref="submodel"/>
    </xs:sequence>
</xs:complexType>

```

Here it is used in the definition of the aggregation:

```

<xs:group
    name="environment">
    <!-- ... -->
    <xs:element
        name="submodels"
        minOccurs="0"
        maxOccurs="1">
        <xs:complexType>
            <xs:sequence>
                <xs:element
                    name="submodel"
                    type="submodel_t"
                    minOccurs="1"
                    maxOccurs="unbounded"/>
            </xs:sequence>
        </xs:complexType>
    </xs:element>
    <!-- ... -->
</xs:group>

```

If a class has one or more descendants, we define an `xs:group` with the `_choice` suffix. This is necessary so that we can enforce a closed set of concrete classes at the de/serialization. In particular, we want to ensure that the discriminator is given correctly (see [Instances Serialized with Discriminator](#)).

Here is an example of a choice:

```

<xs:group
    name="submodelElement_choice">
    <xs:choice>
        <!-- ... -->
    </xs:choice>
</xs:group>

```

```

    <xs:element
      name="property"
      type="property_t"/>
    <xs:element
      name="range"
      type="range_t"/>
    <!-- ... -->
  </xs:choice>
</xs:group>

```

Here the choice is enforced in another group:

```

<xs:group
  name="submodel">
  <xs:sequence>
    <!-- ... -->
    <xs:element
      name="submodelElements"
      minOccurs="0"
      maxOccurs="1">
      <xs:complexType>
        <xs:sequence>
          <xs:group
            ref="submodelElement_choice"
            minOccurs="1"
            maxOccurs="unbounded"/>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
    </xs:sequence>
  </xs:group>

```

Examples

Examples of the XML serializations can be found in [schemas/xml/examples/](#) folder.

Background

Handwritten Schema

When we started with the project, the schema had been manually written. One or two schema designers would sit down, follow the book and translate it into XML schema by best effort. This allowed for a lot of artistic freedom, but eventually caused problems due to mismatches with other serializations or internal inconsistencies. Especially as the metamodel evolved, maintaining the schema and keeping it up-to-date with the metamodel proved to be difficult.

Generated Schema

While the handwritten schema is arguably elegant, the maintenance is too demanding. Therefore, we developed a schema generator based on the machine-readable representation of the metamodel. The generator is provided in [aas-core-codegen](#) project, while the metamodel lives in [aas-core-meta](#).

This allowed us to evolve the XML schema more quickly while keeping it in sync with other serialization schemas and SDKs. However, we had to give up on elegant parts of the schema, and had to straightjacket the schema into form that can be programmatically generated. For example, all properties are serialized as XML elements, and we could not use XML attributes.

Format "Normal" in JSON

JSON[®] (JavaScript Object Notation) is a further serialization format that serializes the metamodel of an Asset Administration Shell for import and export scenarios.

Additionally, JSON format is used to describe the payload in the http/REST API for active Asset Administration Shells [\[37\]](#).

Since JSON is a very versatile format, there are many ways how we could map an AAS model to it. Below we explore our particular design of the serialization schema based on [JSON schema 2019-09](#) , and explain in detail the rules how we mapped the AAS metamodel to it.

Note 1: the JSON schema (.json files) is maintained in the repository "aas-specs" of the GitHub project admin-shell-io [\[51\]](#) in folder [schemas\json](#)

Note 2: example files can be found in the repository "aas-specs" in the GitHub project admin-shell-io [\[51\]](#) in folder [schemas\json\examples](#)

Top-Level Structure

The root of our serialization is a JSON object representing the instance of [Environment](#). This environment contains three aggregations, corresponding to all [identifiable](#) classes:

- [AssetAdministrationShell](#)'s,
- [Submodel](#)'s, and
- [ConceptDescription](#)'s.

The JSON properties of the environment correspond to these three aggregations.

To simplify exploration of the JSON data, identifiable instances are only available at the level of the environment, and nowhere else.

JSON Mapping Rules

Classes to JSON definitions

For each class of the AAS metamodel, we provide a [definition](#) in the JSON schema. The instances of the classes, abstract and concrete alike, are modeled as [JSON objects](#).

UML properties to JSON properties

The class properties of the metamodel (attributes and aggregations) correspond directly to [JSON properties](#).

Optional attributes, *i.e.*, the attributes with the cardinality 0..1, are modeled as [non-required properties](#).

Aggregations, *i.e.*, the properties with the cardinality 0.., 1.. *etc.*, are modeled as [JSON arrays](#).

We explicitly forbid empty JSON arrays to avoid confusion about properties which have cardinality 0..*. Namely, an empty array is semantically equal to an omitted attribute (according to the metamodel). Thus, the JSON property

representing an aggregation attribute must be omitted if the aggregation is empty.

In UML, it is the convention to name associations and aggregations in singular form. The cardinality is to be taken into account to decide on whether there are none, a single or several elements in the corresponding association or aggregation. In JSON, it is best practice to use plural form for array in class properties. The singular name is used for its discriminator (see section on discriminators). Typically, the plural name is derived by just adding an "s" to the name. For example, `submodelElements` instead of `submodelElement` in case of [Submodel](#) class.

If plural form made no sense for a property, we kept it as-is (e.g., `isCaseOf`). The full list of exceptions is available [as code in aas-core-meta](#).

Primitive attribute values

The UML specification uses XSD types. For the mapping of XSD to JSON types please refer to [Format "Value" \(Value-Only Serialization\) in JSON](#).

There are the following exceptions:

[Property](#)/value and [Range](#)/min and [Range](#)/max are mapped to a JSON string. The type it needs to be converted to by the data consumer is declared in [Property](#)/valueType or [Range](#)/valueType, resp.

Primitive type [BlobType](#) (group of `byte`s) is mapped to a JSON string with base64 encoding.

Note: in [valueOnly Format](#) value has the JSON type as declared in [Property](#)/valueType taking the [mapping of XSD to JSON types](#) into account.

Hint: Round-Trip Conversions

Round-trip conversions XML to JSON to XML or RDF to JSON to RDF may not result in the original file.

The result of a model saved as XML is different to the model saved as JSON. For example, if the user typed in `1` for a boolean UML attribute (e.g. for `SubmodelElementList /orderRelevant`) in the editor, saved the model as JSON and opened it again, she would suddenly see `true` instead of `1` (since the JSON library would silently convert `1` to a [JSON boolean](#) `true`).

Inheritance

The inheritance relationships between the classes are modeled using [allOf composition](#). While JSON schema knows no inheritance, we enforce through `allOf` that all the properties of the parent are defined in the descendants.

Discriminator

Many attributes in the metamodel refer to an abstract class. When we de-serialize such attributes, we need to know the concrete class at runtime, since otherwise the de-serialization algorithm would not know how to interpret the properties of the object.

For example, consider the attribute [Submodel](#) which contains instances of [SubmodelElement](#). When the de-serializer encounters the property `submodelElements` as an array and starts de-serializing its items, how can it know which constructor to call to parse the item? This necessary nugget of information is commonly called "discriminator" (e.g., see [OpenAPI 3 specification on polymorphism](#)).

We define the discriminator for our serialization as an additional property, `modelType`, which do not correspond to any attribute in the metamodel. Every class which has one or more descendants will have the discriminator `modelType` in its definition.

When a deserializer needs to de-serialize an instance of an abstract class, it can do so by dispatching the de-serialization to the appropriate de-serialization method based on `modelType`.

Enumerations

The enumerations of the metamodel are directly mapped to [enumerated values in JSON schema](#). Each enumeration is defined separately, and we do not in-line enumerations for readability.

Enumerations which are not directly used in the schema are omitted. For example, subsets of [KeyTypes](#) are omitted since only [KeyTypes](#) is used to define value of an attribute.

Embedded Data Specifications

The metamodel defines data specifications in abstract (see [Data Specification Templates](#)). However, the metamodel omits data specifications in an [Environment](#), and data specifications are intentionally non-identifiable.

For practical applications, we need to access them *somehow*. Therefore, the metamodel mandates to embed them in serializations (see [Embedded Data Specifications](#)).

We consequently embed the data specifications by adding `embeddedDataSpecifications` property to the definition corresponding to [HasDataSpecification](#), and deliberately omit the attribute [HasDataSpecification/dataSpecification](#) in the schema.

Examples

Examples of the JSON serializations can be found in the [GitHub Repository](#) in the [/schemas/json/examples](#) folder.

Background

From Manual Transcription ...

The serialization to and from JSON changed over the course of different versions of the metamodel. Originally, the schema had been manually designed, where a group of authors combed "the book" and manually transcribed it to JSON schema. This was obviously error-prone as it often caused mismatches between other serializations (e.g., XML and RDF), contained inconsistencies etc.

... to Automatic Generation

We eventually moved over to generate the serialization schemas based on a single-point-of-truth. The current source is [aas-core-meta](#), a domain-specific Python representation of the metamodel. The schemas are generated using [aas-core-codegen](#), a translating tool which transpiles `aas-core-meta` into different schemas and other targets such as SDKs.

While this approach reduced the rate of errors significantly, it also imposed certain limits on our schema design. For example, the classes and enumerations are now programmatically mapped to JSON definitions, allowing for no exceptions. Where we could in-line some of them for better readability, we are now forced to stick with the programmatic definitions.

Format "Normal" in RDF

The Resource Description Framework (RDF) [\[32\]](#) is the recommended standard of the W3C to unambiguously model and present semantic data. RDF documents are structured in the form of triples, consisting of subjects, relations, and objects. The resulting model is often interpreted as a graph, with the subject and object elements as the nodes and the relations as the graph edges.

RDF is closely related to web standards, illustrated by the fact that all elements are encoded using (HTTP-)IRIs. As a common practice, the provision of additional information at the referenced location of an RDF entity directly allows the interlinking of entities^[9] based on the web. This process – following links in order to discover related information – is called dereferencing a resource and is supported by any browser or web client. Connecting distributed data sources through the web in the described manner is referred to by the term "Linked Data". Connecting the available resources and capabilities of linked data with the expressiveness of the Asset Administration Shell is one motivation for the RDF

serialization.

In addition, RDF is the basis of a wide range of logical inference and reasoning techniques. Vocabularies like RDF Schema (RDFS) and the Web Ontology Language (OWL) combine the graph-based syntax of RDF with formal definitions and axioms. This allows automated reasoners to understand the relation between entities to some extent and draw conclusions.

Combining both features, the RDF mapping of the Asset Administration Shell can provide the basis for complex queries and requests. SPARQL, the standard query language for the Semantic Web, can combine reasoning features with the integration of external data sources. In order to benefit of these abilities, the Asset Administration Shell requires a clear scheme of its RDF representation. In the following, the necessary transformation rules are presented, followed by an illustration of relevant parts of the scheme and an example.

The complete data model (rdf-ontology.ttl) together with the schema (shacl-schema.ttl) are listed in this [GitHub Repository](#) in the [/schemas/rdf](#) folder.

Note 1: the RDF scheme/OWL files (.ttl files) are maintained in the repository "aas-specs" of the GitHub project admin-shell-io [\[51\]](#) in folder [/schemas/rdf](#)

Note 2: example files can be found in the repository "aas-specs" of the GitHub project admin-shell-io [\[51\]](#) in folder [/schemas/rdf/examples](#)

RDF Mapping Rules

The concepts of the RDF and the derived RDF serialization of the AAS are explained by the mapping rules. These rules are implemented by the [generators](#) used to create the ontology and shacl files based on the independent project [aas-core-works](#). The main design rules are the following:

- The default serialization format is Turtle - also for the ontology and the shapes. However, several equivalent serializations exist for RDF. Among them, the Turtle syntax is regarded as the most appropriate compromise between readability and tool-support. Other formats (RDF/XML, JSON-LD, N3, etc.) can be used without any loss of information.
- [Shape Graphs](#) represent the validation schema. The data model itself is an [RDF ontology](#). As RDF itself is following the open-world-assumption, [SHACL](#) constraints are necessary in order to enable schema validation. Similarly to XSD for XML, the SHACL format can be used to describe constraints (called shapes) of RDF graphs.
- Every entity is encoded as either an IRI or a Literal. RDF uses IRIs for both entities and relations. If no IRI is predefined, a globally unique IRI is generated. Primitive values are encoded as Typed Literals.
- Entities are enhanced with well-known RDF attributes. Interoperability of concepts and attributes is the main advantage of the RDF mapping. Therefore, applying common attributes (`rdf:type` (similar to `modelType` discriminator in JSON), `rdfs:label`, and `rdfs:comment`) enables the usage of standard tools and interfaces.
- Repeating elements are described once and then linked using their IRI identifier. If a distinct element appears more than one time in the original model but in a different context, for instance in more than one submodel, the RDF entity represents the combination of all attributes.
- Multilanguage Strings are split into distinct language strings (`rdf:langString`). Objects are expected to contain a singular information entity, and the currently available tools would not recognize the AAS LangString pattern.
- Multiple object values are represented by repeating the property, one for each value object.
- Abstract AAS classes are modeled in the ontology, nevertheless, using them leads to validation errors in the shapes. RDF does not contain a concept for abstract classes, therefore custom checks using SPARQL queries are supplied.

Example Overview

RDF is often regarded as a graph model, as it provides the flexibility to interlink entities at any stage. In the following, the `./examples/Complete_Example.ttl` [complete example] is originally provided in Turtle but accompanied with visualizations of the represented graph (see [Figure 51](#)): Attributes referencing non-literal values are shown as directed links while Literal values are drawn together with the corresponding entity itself. In order to increase readability, the namespace declaring sections are omitted. The complete example with all namespaces can be found in the [example folder](#). One can see the additionally inserted triples for `rdf:type`, `rdfs:label`, and `rdfs:comment` as determined by Rule 4. The first attribute states the instance' class. The second provides its commonly used name, for instance based on the `idShort` attribute. `rdfs:comment` supplies a short description about the regarded entity, based on the description value. The generally available tools, for instance the open source tool [Protégé](#), render these attributes and display the correct class hierarchy, render the elements with their labels or supply short explanations based on the comments.

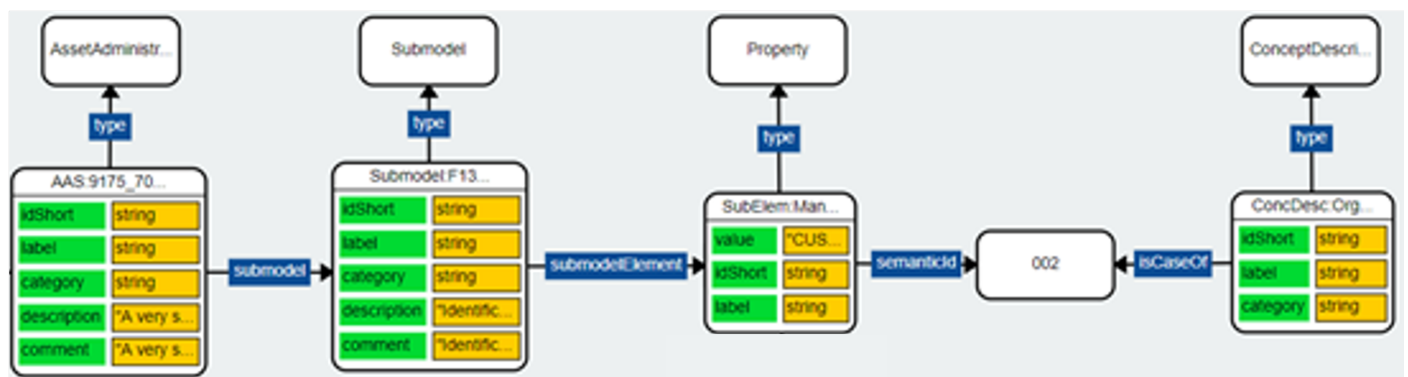


Figure 51. Simplified graph of the core classes in the example

A comprehensive set of generated examples is also provided in the [GitHub Repository](#), always containing a complete and a minimal version of each class. The files have been created using the [aas-core3.0-testgen](#) project to simplify the maintenance process and to stick directly to the efforts made at [aas-core-meta](#).

[1] The word "data formats" is used as shortcut and includes the use of conceptual advantages such as information models, schemes, transmission protocols, etc.

[2] see `SerializationModifier` in Part 2 - IDTA-01002 - of the Specification of the Asset Administration Shell

[3] cf. <https://eclipse-esmf.github.io/samm-specification/2.0.0/payloads.html> (with adjustments for +/-INF, NaN, and language-typed literal support)

[4] The Value-Only serialization of the product classification example can be seen above

[5] for the API a special JSON query parameter, the `SerializationModifier Extent`, is set to **WithoutBLOBValue** for this case (see IDTA-01002)

[6] in this case the JSON query parameter `SerializationModifier Extent` is set to **WithBlobValue** (see IDTA-01002)

[7] see: <https://www.w3.org/TR/2008/REC-xml-20081126/>

[8] see: <https://tools.ietf.org/html/rfc8259> or <https://www.ecma-international.org/publications/standards/Ecma-404.htm>

[9] Note: entity as a generic term and entity as a specific `SubmodelElement` subtype need to be distinguished.

Summary and Outlook

This document has defined the metamodel for the structural viewpoint of the Asset Administration Shell using the technology-neutral modelling language UML.

Several serializations and mappings are offered for the Asset Administration Shell based on this specification:

- XML, mainly used for file exchange between partners via the exchange format .aasx,
- JSON, mainly used for API definition, but also for file exchange as alternative to XML, and
- RDF for reasoning.

Additional parts of the document series cover (see [\[46\]](#)):

- interfaces and APIs for accessing the information of Asset Administration Shells (access, modify, query, and execute information and active functionality), Part 2; the payload of these APIs is based on the definitions of the information model in this document, Part 1,
- predefined data specification templates (Part 3 series), for example for concept descriptions of properties conformant to IEC61360 (Part 3a),
- the infrastructure, which hosts and interconnects multiple Asset Administration Shells, implementing registry, discovery services, endpoint handling, and more,
- security aspects including access control, Part 4.

Annex

Concepts AAS

General

Annex A provides general information about sources of information and relevant concepts for the Asset Administration Shell. Some of these concepts are explained in a general manner. Some concepts are update in order to reflect actual design decisions. No new concepts are introduced. Thus, this clause can be seen as a fully informative annex to the specifications of the Administration Shell.

Relevant Sources and Documents

The following documents were used to identify requirements and concepts for the Administration Shell:

- implementation strategy of Plattform Industrie 4.0 [1][2],
- aspects of the research roadmap in application scenarios [7],
- continuation of the application scenarios [8],
- structure of the Administration Shell [4] [19],
- examples for the Administration Shell of the Industrie 4.0 Components [6],
- technical overview "Secure identities" [9],
- security of the Administration Shell [15],
- relationships between I4.0 components – composite components and smart production [13].

Note 1: the global Plattform Industrie 4.0 glossary can be found at: <https://www.plattform-i40.de/PI40/Navigation/EN/Industrie40/Glossary/glossary.html>

Note 2: the online library of the Plattform Industrie 4.0 can be found at: <https://www.plattform-i40.de/PI40/Navigation/EN/Downloads-News/downloads-news.html>

Note 3: the online library of the Industrial Digital Twin Association can be found at: <https://industrialdigitaltwin.org/en/content-hub/downloads>

Basic Concepts for Industry 4.0

Industry 4.0 describes concepts and definitions for the domain of smart manufacturing. For Industry 4.0, the term asset, being any "object which has a value for an organization", is of central importance [2] [21]. Industry 4.0 assets can take almost any form, e.g. a production system, a product, a software installation, intellectual properties, or even human resources.

According to [21], the "reference architecture model Industry 4.0 (RAMI4.0) provides a structured view of the main elements of an asset using a level model consisting of three axes [...]. Complex interrelationships can thus be broken down into smaller, more manageable sections by combining all three axes at each point in the asset's life to represent each relevant aspect."

Assets shall have a logical representation in the "information world", e.g. managed by IT systems. Consequently, an asset needs a precise identification as an entity, shall have a "specific state within its life (at least a type or instance)", shall have communication capabilities, shall be represented by means of information and shall be able to provide technical functionality [21]. This logical representation of an asset is called Administration Shell [4]. The combination of

asset and Administration Shell forms the so-called I4.0 component. In international papers [\[19\]](#), the term smart manufacturing replaces the term Industry 4.0.

As far as the large variety of assets in Industry 4.0 are concerned, the Asset Administration Shell allows these assets to be handled in the same manner within the information world. This reduces complexity and allows for scalability. Additional motivation can be found in [\[2\]](#) [\[4\]](#) [\[7\]](#) [\[8\]](#).

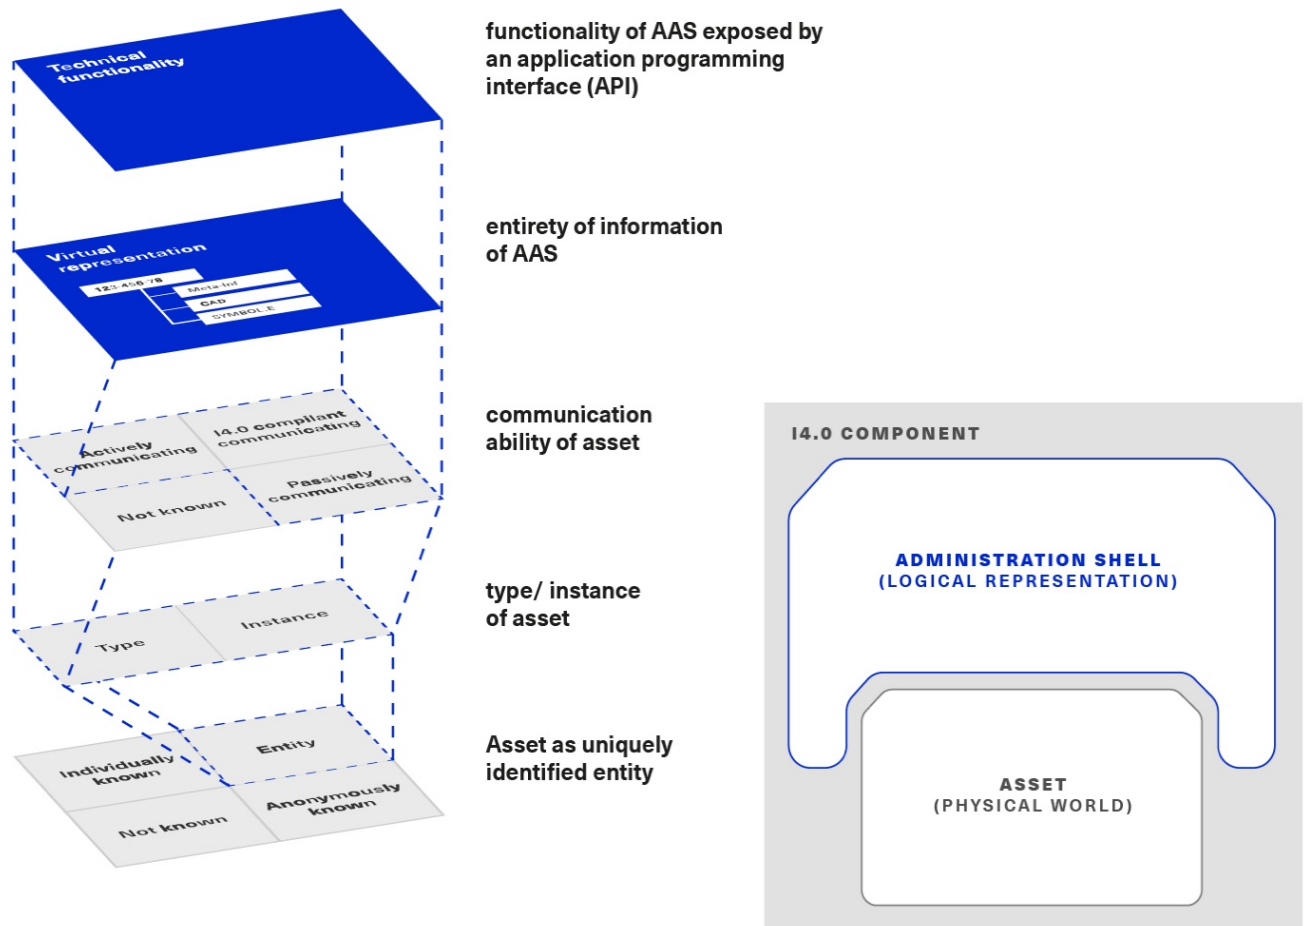


Figure 52. Important Concepts of Industry 4.0 attached to the Asset [\[2\]](#) [\[21\]](#)

The Concept of Properties

According to [\[20\]](#), the "IEC 61360 series provides a framework and an information model for product dictionaries. The concept of product type is represented by 'classes' and the product characteristics are represented by 'properties'".

Standardized data elements are an example for such properties. The definitions can be found in a range of repositories, such as IEC CDD (common data dictionary) or ECLASS. The definition of a property (aka standardized data element type, property type) associates a worldwide unique identifier with a definition, which is a set of well-defined attributes. Relevant attributes for the Administration Shell are, amongst others, the preferred name, the symbol, the unit of measure, and a human-readable textual definition of the property.

Code:	0112/2///62683#ACE424
Version:	001
Revision:	01
IRDI:	0112/2///62683#ACE424#001
Preferred name:	rated current
Synonymous name:	
Symbol:	In
Synonymous symbol:	
Short name:	
Definition:	maximum uninterrupted current equal to the conventional free-air thermal current (Ith)
Note:	
Remark:	
Primary unit:	A
Alternative units:	
Level:	
Data type:	LEVEL(MAX) OF REAL_MEASURE_TYPE

Figure 53. Exemplary Definition of a Property the IEC CDD

The instantiation of such a definition (just 'property', property instance) typically associates a value to the property. This mechanism makes it possible to convey semantically well-defined information to the Administration Shell.

Note: Industry 4.0 and smart manufacturing in general will require many properties, which are beyond the current scope of IEC CDD, ECLASS, or other repositories. It is expected that these sets of properties will be introduced, as more and more domains are modelled and standardized (see next clause).

The Concept of Submodels

"The Administration Shell is the standardized digital representation of the asset, corner stone of the interoperability between the applications managing the manufacturing systems" [\[19\]](#). Hence, it should provide a minimal but sufficient description according to the different application scenarios in Industry 4.0 [\[7\]](#) [\[8\]](#). Many different (international) standards, consortia and manufacturer specifications can already contribute to this description [\[19\]](#).

As the figure shows, information from many different domains can be associated with a respective asset, and many different properties are required to be represented in Administration Shells of future I4.0 components. The architectural principle "separation of concerns" is supported by submodels.

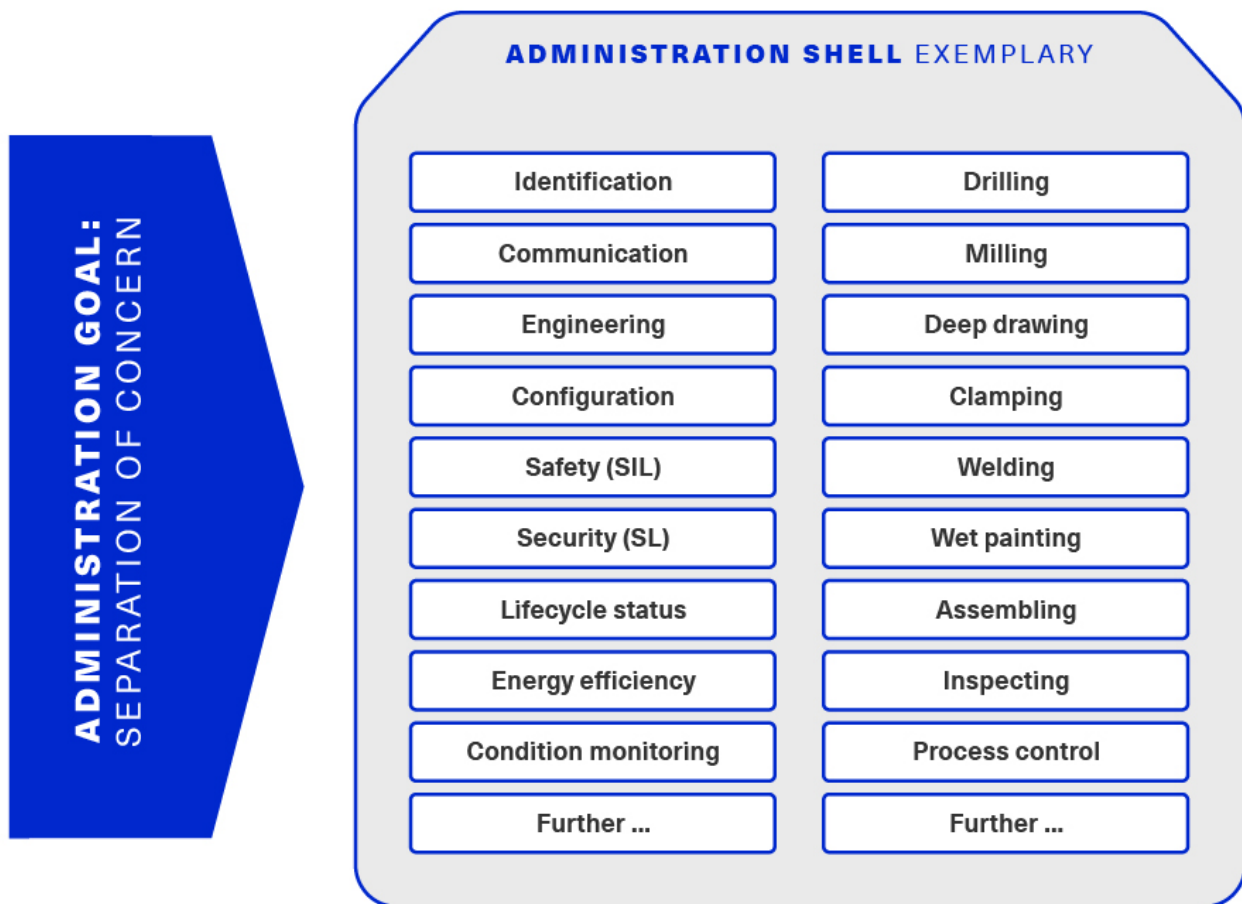


Figure 54. Examples of Different Domains Providing Properties for Submodels of the Administration Shell

The Administration Shell is made up of a series of submodels [4]. These represent different aspects of the asset concerned. For example, they may contain a description relating to safety or security [15] but they could also outline various process capabilities such as drilling or installation [6].

From an interoperability perspective, the goal is to standardize only a single Submodel for each aspect/ technical domain. For example, it will be possible to find a drilling machine by searching for an Administration Shell containing a Submodel "Drilling" with appropriate properties. Certain properties can then be assumed to exist for communication between different I4.0 components. In our example, a second Submodel "energy efficiency" could make sure the drilling machine is able to cut its electricity consumption when out of operation.

Note: a side benefit of the Administration Shell will be to simplify the update of properties from product design (and in particular system design) tools, update properties from real data collected in the instances of assets, improve traceability of assets along the life cycle, and help certify assets from data.

Basic Structure of the Asset Administration Shell

The document on the structure of the Asset Administration Shell [4] [19] presents a rough, logical view of the Asset Administration Shell's structure. The Asset Administration Shell – shown in blue in the following figure – comprises different sets of information. Both the asset and the Administration Shell are identified by a globally unique identifier. It comprises a number of submodels, which characterize the Asset Administration Shell.

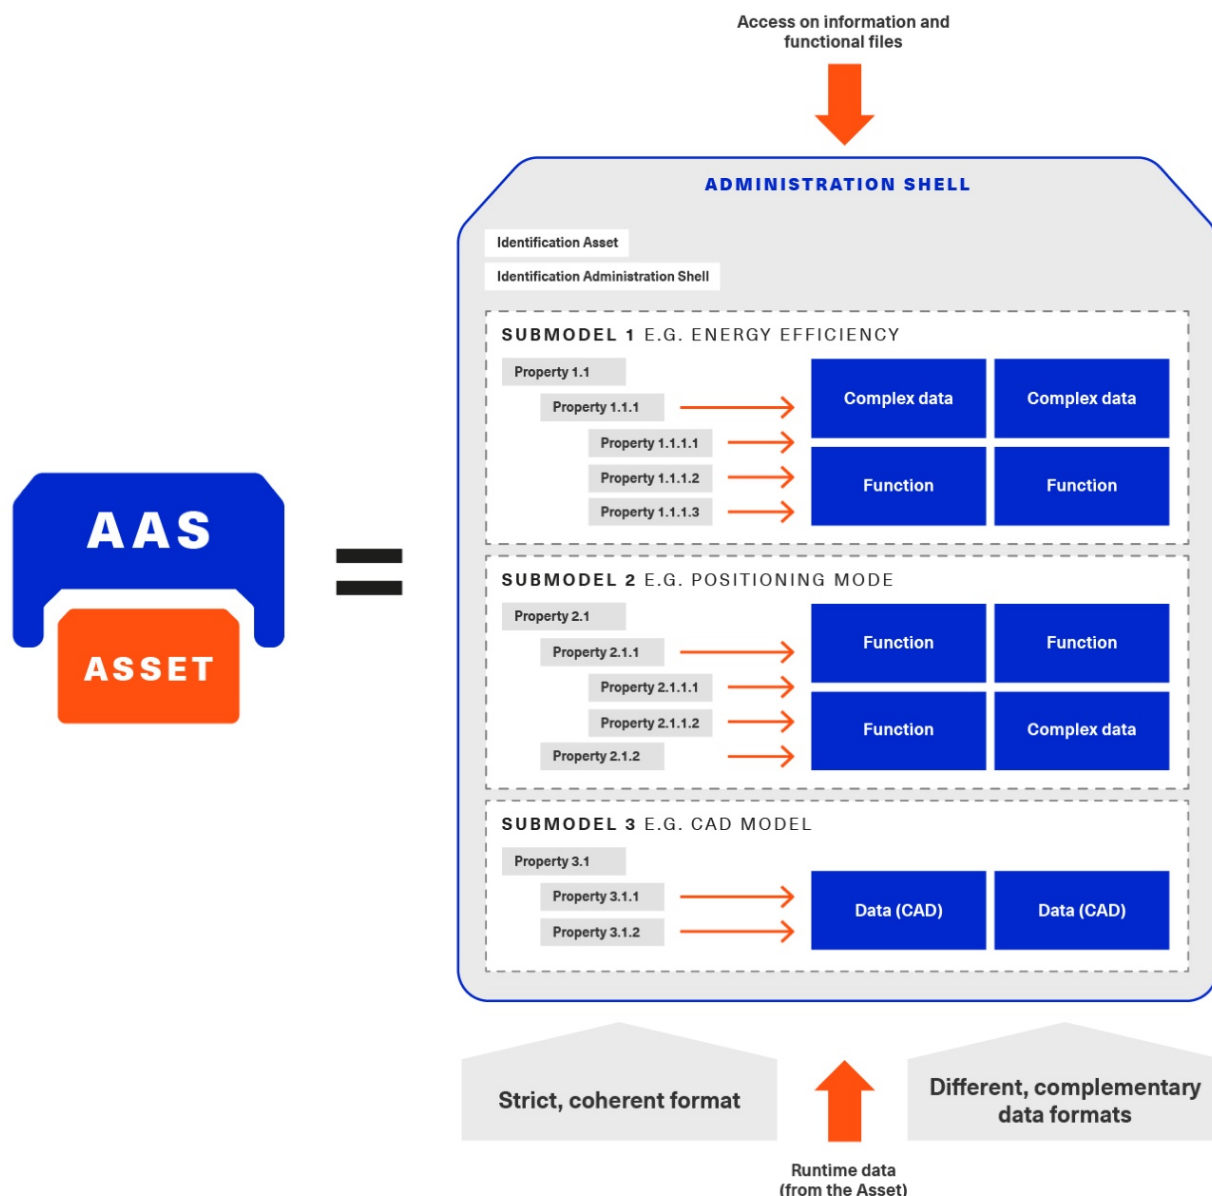


Figure 55. Basic Structure of the Asset Administration Shell

Properties, data, and functions will contain information that not every partner within a value-added network or even within an organizational unit should be able to access; its integrity and availability should be guaranteed. Therefore, the structure of the Administration Shell shall be able to handle aspects such as access protection, visibility, identity, and rights management, confidentiality, and integrity. Information security needs to be respected and has to be aligned with an overall security concept. Security implementation must go together with the implementation of other components of an overall system.

Each Submodel contains a structured quantity of properties that can refer to data and functions. A standardized format based on IEC 61360-1/ ISO 13584-42 is envisaged for the properties. Property value definition shall follow the same principles as ISO 29002-10 and IEC 62832-2. Data and functions may be available in various complementary formats.

The properties of all the submodels therefore result in a constantly readable key information directory of the Administration Shell and hence of the I4.0 component. To enable binding semantics, Administration Shells, assets, submodels, and properties must all be clearly identified. For identification of these elements the following types of global identifiers are allowed: IRDIs (used for example in ISO TS 29002-5, ECLASS and IEC CDD) and IRIs (Internationalized Resource Identifier, used for example in ontologies).

It should be possible to filter elements of the Administration Shell or submodels according to different given views (see example C.4 in [19]). This facilitates different perspectives or use cases to access the Administration Shell's information.

How Are New Identifiers Created?

Following the different identification types from [Which Identifiers for Which Elements?](#), it can be stated that:

- a. IRDIs are assumed to already exist due to an external specification and standardization process in the creation of a certain Administration Shell. To bring such IRDI identifiers to life, please refer to Clause 5 of this document [\[4\]](#).
- b. URIs and URLs can easily be created by developers when forming a certain Administration Shell. All they need is a valid-authenticated URL, for example of the company. They also need to make sure that the domain (e.g. admin-shell.io) appended to the host's name is reserved in a semantically unique way for these identifiers. This way, each developer can create an arbitrary URI or URL by combining the host name and some chosen path, which only needs to be unique in the developer's organization.
- c. Custom identifiers can also be easily formed by developers. They only need to make sure that internal custom identifiers can be clearly distinguished from (a) or (b).
- d. Local identifiers can also be created on the fly. They have to be unique within their namespace.

Best Practice for Creating URI Identifiers

The approach for semantics and interaction for I4.0 components [\[18\]](#) suggests the use of the following structure (see [Table 11](#)) for URIs^[4], which is slightly modified here. The idea is to always structure URIs following a scheme of different elements. However, this is just a recommendation and by no means mandatory.

Table 11. Proposed Structure for URIs

Element	Description	Syntax component
Organization	Legal body, administrative unit, or company issuing the ID	A
Organizational subunit/document ID/document subunit	Sub entity in organization above, released specification, or publication of organization above	P
Submodel/domain ID	Submodel of functional or knowledge-wise domain of asset or Administration Shell, which the identifier belongs to	P
Version	Version number in line with release of specification or publication of identifier	P
Revision	Revision number in line with release of specification or publication of identifier	P
Property/element ID	Property or further structural element ID of the Administration Shell	P
Instance number	Individual numbering of the instances within release of specification or publication	P

In the table, syntax component "A" refers to authority of RFC 3986 (URI) and namespace identifier of RFC 2141 (URN); "P" refers to path of RFC 3986 (URI) and namespace specific string of RFC 2141 (URN).

Grammar:

```
<AAS URI> ::= <scheme> ":" <authority> [ <path> ]
```

```
<scheme> ::= a valid URI scheme
```

```

<authority> ::= Organization

<path> ::= <subunit> <domain> <release> <element>

<subunit> ::= \{ ("/" | ":") <Organizational Subunit/Document ID/Document subunit> }*

<domain> ::= [ ("/" | ":") <Submodel / Domain-ID>

<release> ::= [ ("/" | ":") <Version> [ ("/" | ":") <Revision> ]* ]

<element> ::= [ ("/" | ":" | "#") \{( <Property/Element-ID> | <Instance number> )}* ]

```

Using this scheme, valid URNs and URLs can be both created as URIs. The latter are preferred for Administration Shells, as functionality (such as REST services) can be bound to the identifiers. Examples of such identifiers are given in [Table 12](#).

Table 12. Example URN and URL-based Identifiers of the Asset Administration Shell

Identifier	Examples
Administration Shell ID	urn:com.example:demo.aas.1.1#73BA55B11FKDAVO http://example.com/demo/aas/1/1/73BA55B11FKDAVO
Submodel ID (Template)	urn:GMA:7.20:contractnegotiation:1:1 http://www.vdi.de/gma720/contractnegotiation/1/1
Submodel ID (Instance)	urn:GMA:7.20:contractnegotiation:1:1#001 http://www.vdi.de/gma720/contractnegotiation/1/1#001
ID of type or Concept Description of a Property etc.	urn:PROFIBUS:PROFIBUS-PA:V3-02:Parameter:1:1:MaxTemp https://admin-shell.io/idta/cds/manufacturerName/1
Property, etc. (not used by metamodel)	urn:PROFIBUS:PROFIBUS-PA:V3-02:Parameter:1:1:MaxTemp#0002 http://purl.org/dc/terms/created https://admin-shell.io/idta/CarbonFootprint/ProductCarbonFootprint/1/2

Note: the last row of [Table 12](#) is only used for completion; the metamodel does not foresee own unique identifiers for property/parameter/status instances.

General Topics

Introduction

Before specifying the information metamodel of the Asset Administration Shell, some general topics relevant for the Asset Administration Shell are explained.

[Types and Instances](#) describes some general aspects of handling type and instance assets.

[Identification of Elements](#) explains the very important aspects of identification in the context of the Asset

Administration Shell.

[Matching Strategies](#) provides matching strategies for semantic identifiers and references.

[Submodel Instances and Templates](#) explains the difference between Submodel instances and templates.

[Events](#) discusses aspects of event handling.

Types and Instances

Life Cycle with Type Assets and Instance Assets

Industry 4.0 utilizes an extended understanding of assets, comprising elements such as factories, production systems, equipment, machines, components, produced products and raw materials, business processes and orders, immaterial assets (such as processes, software, documents, plans, intellectual property, standards), services, human personnel, etc..

The RAMI4.0 model [3] defines a generalized life cycle concept derived from IEC 62890. The basic idea is to distinguish between possible types and instances for all assets within Industry 4.0. This makes it possible to apply the type/instance distinction for all elements such as material type/material instance, product type/product instance, machine type/ machine instance, etc. Business-related information is handled on the 'business' layer of the RAMI4.0 model. The business layer also covers order details and workflows, again for both type and instance assets.

Note 1: to distinguish asset [type](#) and asset [instance](#), the term [asset kind](#) is used in this document. The three different relationship classes between assets, especially type assets and instance assets, explained below show why the distinction is so important. The attribute "derivedFrom" in the metamodel is used to explicitly state a relationship between assets that are being derived from one another. Other relationships are not explicitly supported by the metamodel of the Asset Administration Shell, but they can be modelled via the ["RelationshipElement"](#) SubmodelElement type.

Note 2: Besides asset types and asset instances there are also other kinds of assets (see [enumeration AssetKind](#)). However, in the following examples we do not consider them.

[Table 13](#) gives an overview of the different life cycle phases and the role of type assets and instance assets as well as their relationship in these phases.

This important relationship should be maintained throughout the life of the instance assets. It makes it possible to forward updates from the type assets to the instance assets, either automatically or on demand.

Table 13. Life Cycle Phases and Roles of Type and Instance Assets

Asset Kind	Life Cycle Phase	Description
Type asset	Development	Valid from the ideation/conceptualization to the first prototypes/test. The 'type' of an asset is defined; distinguishing properties and functionalities are defined and implemented. All (internal) design artefacts associated with the type asset are created, such as CAD data, schematics, embedded software.
	Usage/ Maintenance	Ramping up production capacity. The 'external' information associated to the asset is created, such as technical data sheets, marketing information. The selling process starts.

Asset Kind	Life Cycle Phase	Description
Instance asset	Production	Instance assets are created/produced, based on the type asset information. Specific information about production, logistics, qualification, and test are associated with the instance assets.
	Usage/ Maintenance	Usage phase by the purchaser of the instance assets. Usage data is associated with the instance asset and might be shared with other value chain partners, such as the manufacturer of the instance asset. Also included: maintenance, re-design, optimization, and de-commissioning of the instance asset. The full life cycle history is associated with the asset and might be archived/shared for documentation.

The second class of relationships are feedback loops/information within the life cycle of the type asset and instance asset. For product assets, for example, information on usage and maintenance of product instances may be used to improve product manufacturing as well as the design of the (next) product type.

The third class of relationships are feedforward/information exchange with assets of other asset classes. For example, sourcing information from business assets can influence design aspects of products; or the design of the products affects the design of the manufacturing line.

Note 3: the NIST model [\[49\]](#) provides an illustration of the second/third class of relationships.

A fourth class of relationships consists between assets of different hierarchy levels. For example, these could be the (dynamic) relationships between manufacturing stations and currently produced products. They could be also the decomposition of production systems in physical, functional, or safety hierarchies. In this class of relationships, automation equipment is seen as a complex, interrelated graph of automation devices and products, performing intelligent production and self-learning/optimization tasks.

Details and examples for composite I4.0 Components can be found in [\[12\]](#). A composite I4.0 Component is the combination of a complex asset and its Asset Administration Shell. The hierarchy, typically a Bill of Material (BOM) but also any other relationship between different assets, can be represented in one of its submodels.

Note 4: for submodels representing the Bill of Material of a complex asset, the metamodel not only provides the possibility to define relationships (via the SubmodelElement [RelationshipElement](#), see above), it also explicitly supports the representation of another asset (via the SubmodelElement [Entity](#)). The term "Entity" is chosen as superordinate concept in this context and refers to either an asset or another item that is not an asset but may be part of a more complex item or asset.

Asset Administration Shells Representing Type Assets and Instance Assets

An Asset Administration Shell typically either represents a [type asset](#) or an [instance asset](#). Typically, there is a relationship between instance assets and a type asset. However, not every instance asset is required to have a corresponding type asset.

[Figure 56](#) gives an example of how to handle type assets and their derived instance assets. The attribute "assetKind" indicates whether the Asset Administration Shell (denoted by the ":AAS" UML notation for a class instance of the class "AAS") represents a type asset or an instance asset. Additionally, attributes are added to show that the attributes of type asset and instance assets typically differ from each other.

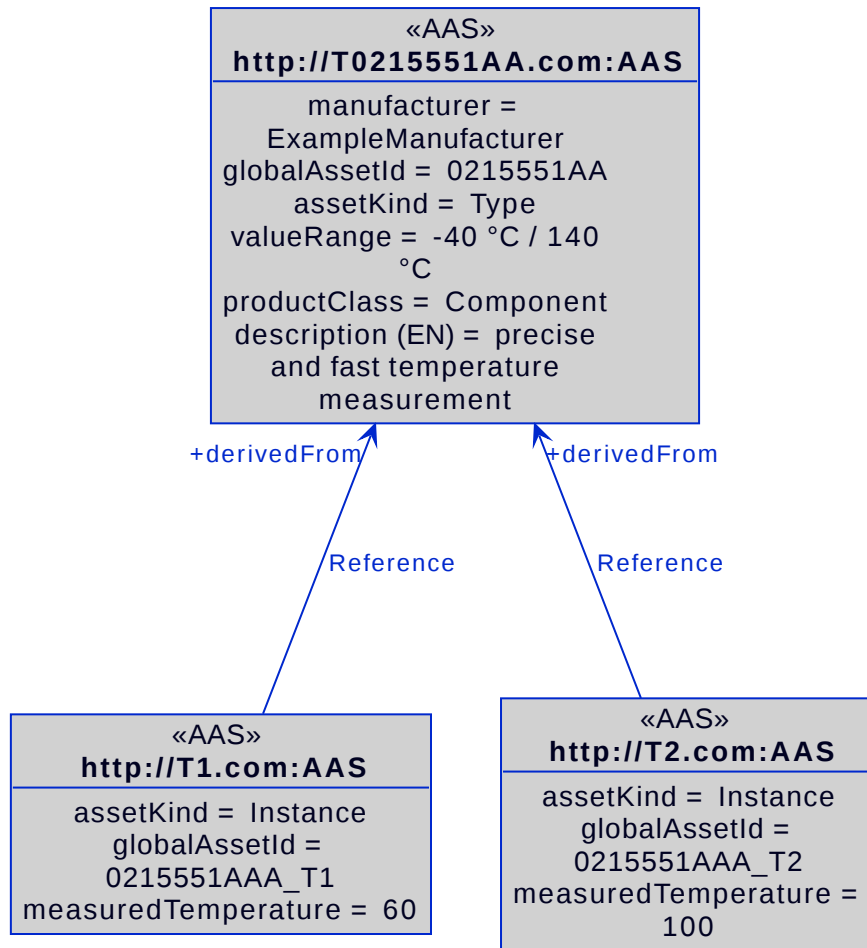


Figure 56. Example: Asset Administration Shells for Type and Instance Assets

Note 1: the example is simplified for ease of understanding and only roughly complies with the metamodel as specified in [Specification \(normative\)](#). The ID handling is simplified as well: the names of the classes correspond to the unique global identifier of the Asset Administration Shells.

Note 2: in the context of Plattform Industrie 4.0, types and instances typically refer to "type assets" and "instance assets". When referring to types or instances of an Asset Administration Shell, this is explicitly denoted as "Asset Administration Shell types" and "Asset Administration Shell instances" to not mix them up. Asset Administration Shell types are synonymously used with the term "Asset Administration Shell template".

Note 3: please refer to [Terms and Definitions](#) for the IEC definition of types and instances. Within the scope of this document, there is no full equivalency between these definitions and the type/instance concepts of object-oriented programming (OO).

There shall be a concrete type asset of a temperature sensor and two uniquely identifiable physical temperature sensors of this type. The intention is to provide a separate Asset Administration Shell for the type asset as well as for every single instance asset.

In the example, the first sensor has the unique ID "0215551AAA_T1" and the second sensor has the unique ID "0215551AAA_T2". "0215551AAA_T1" and "0215551AAA_T2" are the global asset IDs of the two assets, i.e. sensors. The Asset Administration Shell for the first sensor has the unique URI "http://T1.com" and the Asset Administration Shell for the second sensor has the unique URI "http://T2.com". The asset kind of both is "Instance". The example shows that the measured temperature at operation time of the two sensors is different: for T1 it is 60 °C, for T2 it is 100 °C. The relationship "derivedFrom" of the two Asset Administration Shells "http://T1.com " and "http://T2.com" with

Asset Administration Shell "http://T0215551AA.com" will be explained later.

Note 1: even though the HTTP scheme is used for the identifier, please be aware that these identifiers are logical ones. Identifiers do not have to be URLs. At the same time, URLs used as identifiers do not have to refer to accessible content.

Note 2: the physical unit can be obtained by the semantic reference of the element "measuredTemperature". This is not shown in the example for simplicity reasons.

These two instance assets share a lot of information on the type asset (in this example a sensor type), for which an own Asset Administration Shell is created. The unique ID for this Asset Administration Shell is "http://T0215551AA.com", the unique ID of the sensor type is "0215551AA". The asset kind is "Type" and not "Instance". The information shared by all instances of this temperature sensor type is the product class (= "Component"), the manufacturer (= "ExampleManufacturer"), the English Description (= "precise and fast temperature measurement"), and the value range ("-40 °C / 140 °C").

Now the two Asset Administration Shells of the two instance assets may refer to the Asset Administration Shell of the type asset "0215551AA" using the relationship attribute "derivedFrom".

Note 1: in the UML sense, "attribute" refers to the property or characteristic of a class (instance).

Note 2: if a specific type asset exists, it typically exists in time before the respective instance assets.

Note 3: the term Asset Administration Shell is used synonymously with the term Asset Administration Shell instance. An Asset Administration Shell may be realized based on an Asset Administration Shell type. Asset Administration Shell types are out of the scope of this document.

Note 4: in the domain of the Internet of Things (IoT), instance assets are typically denoted as "Things" whereas type assets are denoted as "Product".

Asset Administration Shell Types and Instances

In the previous clause, type assets and instance assets were explained. The obvious question now is how to harmonize Asset Administration Shells and Asset Administration Shell types. The example in [Figure 57](#) shows that the attributes "globalAssetId" and "assetKind" as well as the global Asset Administration Shell identifier (*id*, represented as name of the class) are present for all Asset Administration Shells. However, if there is no standard, the semantics of "id", "globalAssetId" or "kind" are not clear, although they are the same for all Asset Administration Shells. It is also not clear, which of the attributes are mandatory and which are specific for the asset (type or instance), as illustrated in [Figure 57](#).

This is the purpose of this document: the definition of a metamodel that defines which attributes are mandatory and which are optional for all Asset Administration Shells. The metamodel for Asset Administration Shells is defined in [Specification](#).

The metamodel of the Asset Administration Shell is suitable for type assets or instance assets. An alternative approach could have been to define two metamodels, one for type assets and one for instance assets. However, the large set of similarities led to the decision of only one metamodel.

The metamodel itself does not require the existence of mandatory submodels. This is another step of standardization similar to the standardization of submodels of the Asset Administration Shell type level.

An Asset Administration Shell type shall be realized based on the metamodel of an Asset Administration Shell as defined in this document. This metamodel is referred to as "Asset Administration Shell Metamodel".

It is not mandatory to define an Asset Administration Shell type before defining an Asset Administration Shell (instance). An Asset Administration Shell instance that does not realize an Asset Administration Shell type shall be realized based on the metamodel of an Asset Administration Shell as defined in this document.

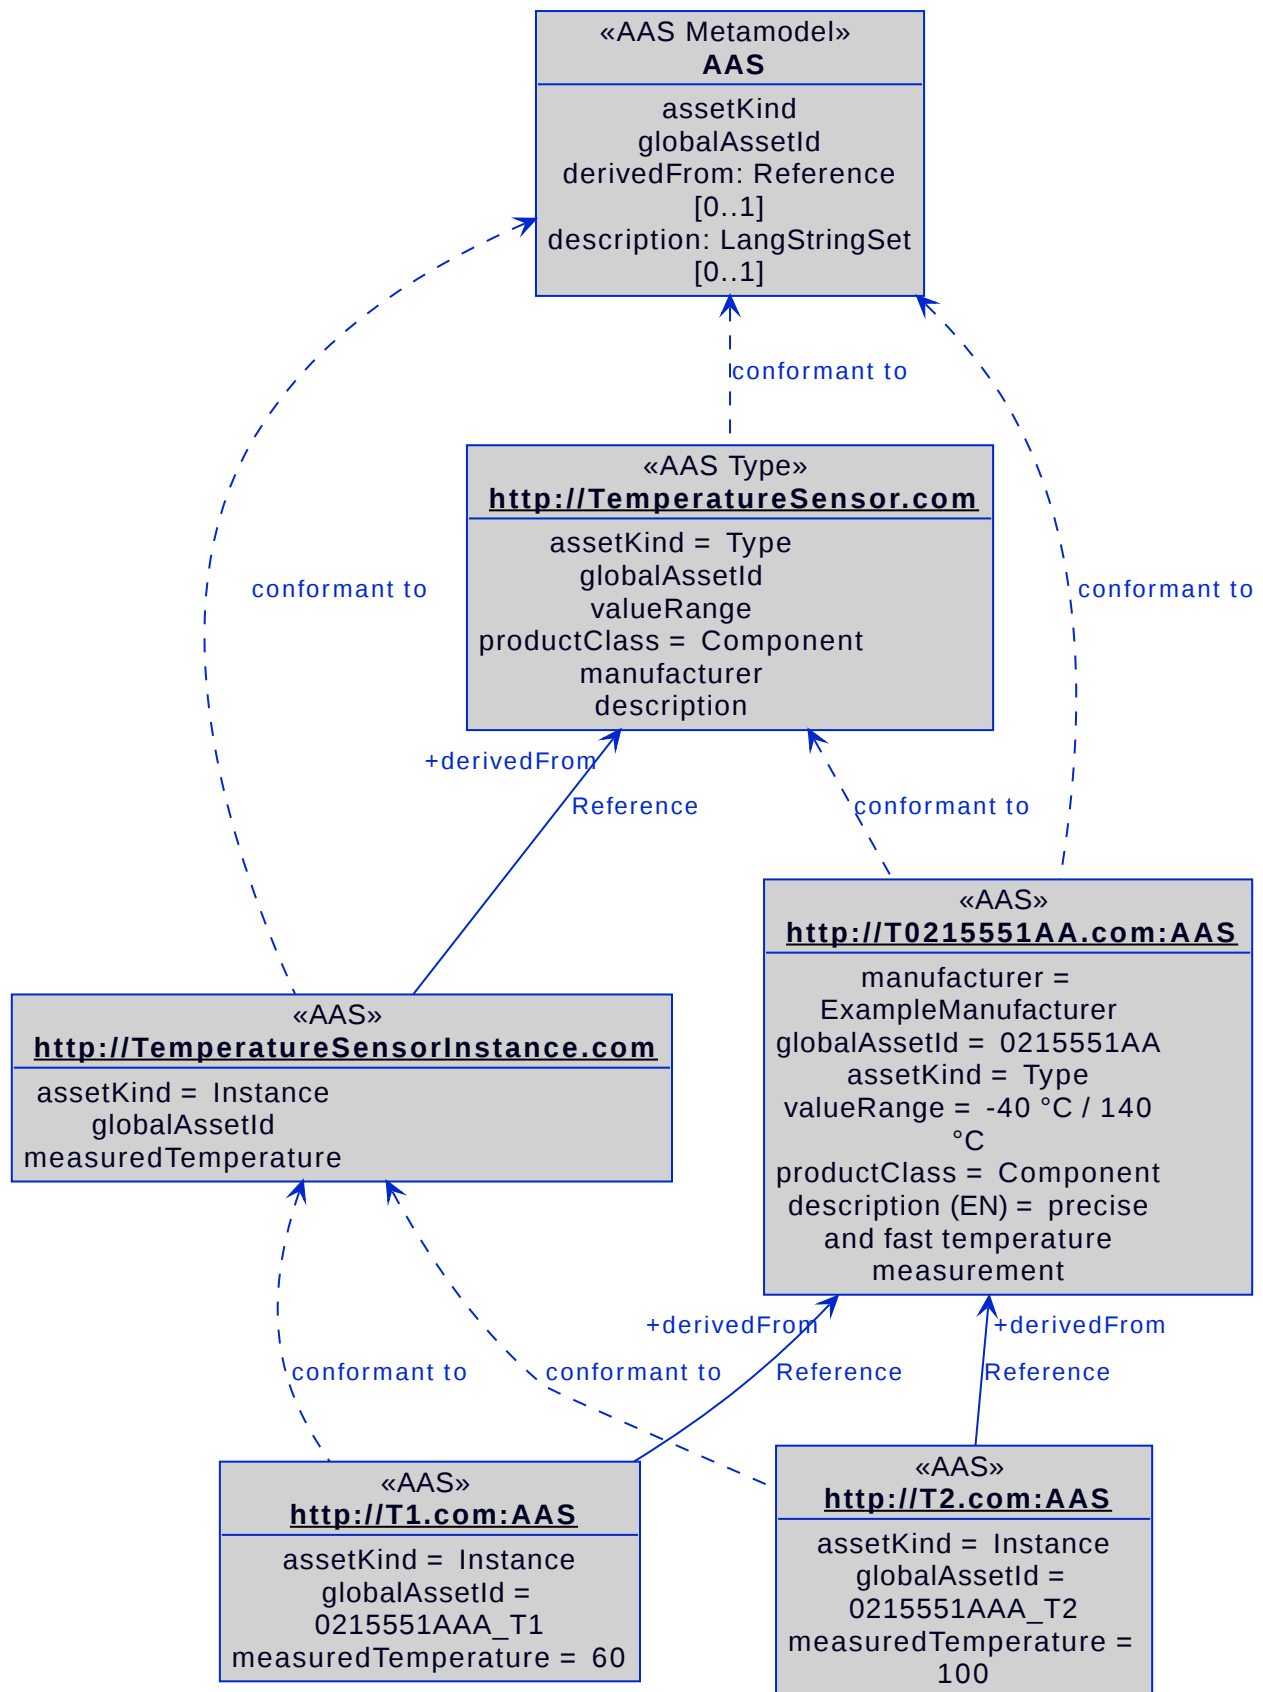


Figure 57. Example: Asset Administration Shell, Asset Administration Shell Types and Instances

Identification of Elements

Overview

According to [4], identifiers are needed for the unique identification of many different elements within the domain of smart manufacturing. They are a fundamental element of a formal description of the Administration Shell. Identification

is especially required for

- Asset Administration Shells,
- assets,
- Submodel instances and Submodel templates,
- property definitions/concept descriptions in external repositories, such as ECLASS or IEC CDD.

Identification will take place for two purposes

- to uniquely distinguish all elements of an Administration Shell and the asset it is representing, and
- to relate elements to external definitions, such as Submodel templates and property definitions, in order to bind semantics to this data and the functional elements of an Administration Shell.

Identifiers for Assets and Administration Shells

In the domain of smart manufacturing, the assets need to be uniquely identified worldwide [4] [20] by the means of identifiers (IDs). The Administration Shell also has a unique ID (see Figure 58).




Figure 58. Unique Identifier for Administration Shell and Asset (Modified Figure from [4])

An Administration Shell represents exactly one asset, with a unique asset ID. In a batch-based production, the batches will become the assets and will be described by a respective Administration Shell. If a set of assets shall be described by an Administration Shell, a unique ID for the composite asset needs to be created [13].

The ID of the asset needs to comply with the restrictions for global identifiers according to [4][20]. If the asset features further identifications like serial numbers and alike, they are not to be confused with the unique global identifiers of the asset itself[2].

What Type of Identifiers Exist?

In [4][20], two standard-conforming global identification types are defined:

- **IRDI** – ISO29002-5, ISO IEC 6523 and ISO IEC 11179-6 [20] as an identifier scheme for properties and classifications. They are created in a process of consortium-wise specification or international standardization. To this end, users come together and feed their ideas into the consortia or standardization bodies. Properties in ISO, IEC help to safeguard key commercial interests. Repositories like ECLASS and others make it possible to standardize a relatively large number of identifiers in an appropriately short time.
- **IRI** – IRI (RFC 3987) or URI and URL according to RFC 3986 as identification of assets, Administration Shells and other (probably not standardized, but globally unique) properties and classifications.

The following is also permitted:

- **Custom** – internal custom identifiers such as UUIDs/GUIDs (universally unique identifiers/globally unique identifiers), which a manufacturer can use for all sorts of in-house purposes within the Administration Shell.

This means that the IRIs/URIs/URLs and internal custom identifiers can represent and communicate manufacturer-specific information and functions in the Administration Shell and the 4.0 infrastructure just as well as standardized information and functions. One infrastructure can serve both purposes.

Besides the global identifiers, there are also identifiers that are unique only within a defined namespace, typically its parent element. These identifiers are also called local identifiers. For example, properties within a Submodel have local identifiers.

Besides absolute URIs there are also relative URIs.

See also DIN EN IEC 61406 [31] for further information on identification.

Which Identifiers for Which Elements?

Not every identifier is applicable for every element of the UML model representing the Asset Administration Shell. [Table 14](#) therefore gives an overview on the different constraints and recommendations on the various entities, which implement [Identifiable](#) or [HasSemantics](#).

See Annex [How Are New Identifiers Created?](#) for more information on how to create new identifiers and best practices for creating URI identifiers.

Table 14. Elements with Allowed Identifying Values

Elements with identifying values	Attribute	Allowed identifiers (recommended or typical)	Remarks
AssetAdministrationShell	id	IRI (URL)	mandatory Typically, URLs will be used.
	idShort	string	optional ³⁾
	displayName	multi language string	optional
AssetInformation	globalAssetId	IRI	recommended As soon as the Asset Administration Shell is "released" for production or operation, a globalAssetId should be assigned. An Asset ID may be retrieved e.g., by a QR code on the asset, by an RFID for the asset, from the firmware of the asset, or from an asset database. IEC 61406 (formerly DIN SPEC 91406) defines the format of such Asset IDs.
	specificAssetId	IRI, Custom	recommended An asset typically may be represented by several different identification properties like for example the serial number, its RFID code etc. They are used for lookup of Asset Administration Shells in cases the globalAssetId is not available. However, they do not need to be globally unique.

Elements with identifying values	Attribute	Allowed identifiers (recommended or typical)	Remarks
	assetType	IRI	recommended In case of AssetInformation/assetKind = Instance, specify the AssetInformation/globalAssetId of the type asset
Submodel with kind = Template	id	IRDI, IRI (URI)	mandatory IRDI, if the defined Submodel is standardized and has been assigned an IRDI.
	idShort	string	recommended Typically used as idShort for the Submodel of kind Instance as well
	displayName	multi language string	recommended Typically used as displayName for the Submodel of kind Instance as well
	semanticId	IRDI, IRI (URI)	recommended The semantic ID might refer to an external semantic model defining the semantics of the submodel.
	supplementalSemanticId	IRDI, IRI (URI)	optional
Submodel with kind = Instance	id	IRI (URI), Custom	mandatory
	idShort	string	recommended Typically, the idShort or English short name of the Submodel template that is referenced via semanticId.
	displayName	multi language string	optional
	semanticId	IRDI, IRI (URI)	recommended Typically, the semanticId is an external reference to an external standard defining the semantics of the submodel.
	supplementalSemanticId	IRDI, IRI (URI)	optional

Elements with identifying values	Attribute	Allowed identifiers (recommended or typical)	Remarks
SubmodelElement	idShort	string	mandatory with one exception: SubmodelElements within a SubmodelElementListList do not need to have an <i>idShort</i> but it is recommended that they do Typically, the English short name of the concept definition that is referenced via semanticId.
	displayName	multi language string	optional If no display name is defined in the language requested by the application, the display name may be selected in the following order, if available: • the preferred name in the requested language of the concept description defining the semantics of the element, • if there is a default language list defined in the application, the corresponding preferred name in the language is chosen according to this order, • the English preferred name of the concept description defining the semantics of the element, • the short name of the concept description, • the idShort of the element.
	semanticId	IRDI, IRI (URI), Custom	recommended link to a <i>ConceptDescription</i> or the concept definition in an external repository via a global ID
	supplementalSemanticId	IRDI, IRI (URI)	optional
ConceptDescription	id	IRDI, IRI, Custom	mandatory <i>ConceptDescription</i> needs to have a global ID. If the concept description is a copy from an external dictionary like ECLASS or IEC CDD, it may use the same global ID as it is used in the external dictionary.
	idShort	string	recommended e.g. same as English short name

Elements with identifying values	Attribute	Allowed identifiers (recommended or typical)	Remarks
	displayName	multi language string	optional
	isCaseOf	IRDI, IRI (URI)	optional links to the concept definition in an external repository, which the concept description is a copy from, or that it corresponds to
Qualifier	semanticId	IRDI, IRI (URI), Custom	recommended Links to the qualifier type definition in an external repository IRDI, if the defined qualifier type is standardized and has been assigned an IRDI.

Usage of Short ID for Identifiable Elements

The Administration Shell fosters the use of worldwide unique identifiers to a large degree. However, in some cases, this may lead to inefficiencies. Example: a property, which is part of a submodel, which in turn is part of an Administration Shell, each of which is identified by global identifiers [4].

In an application featuring a resource-oriented architecture (ROA), a worldwide unique resource locator (URL) might be composed of a series of segments, which do not need to be globally unique, see [Figure 59](#).

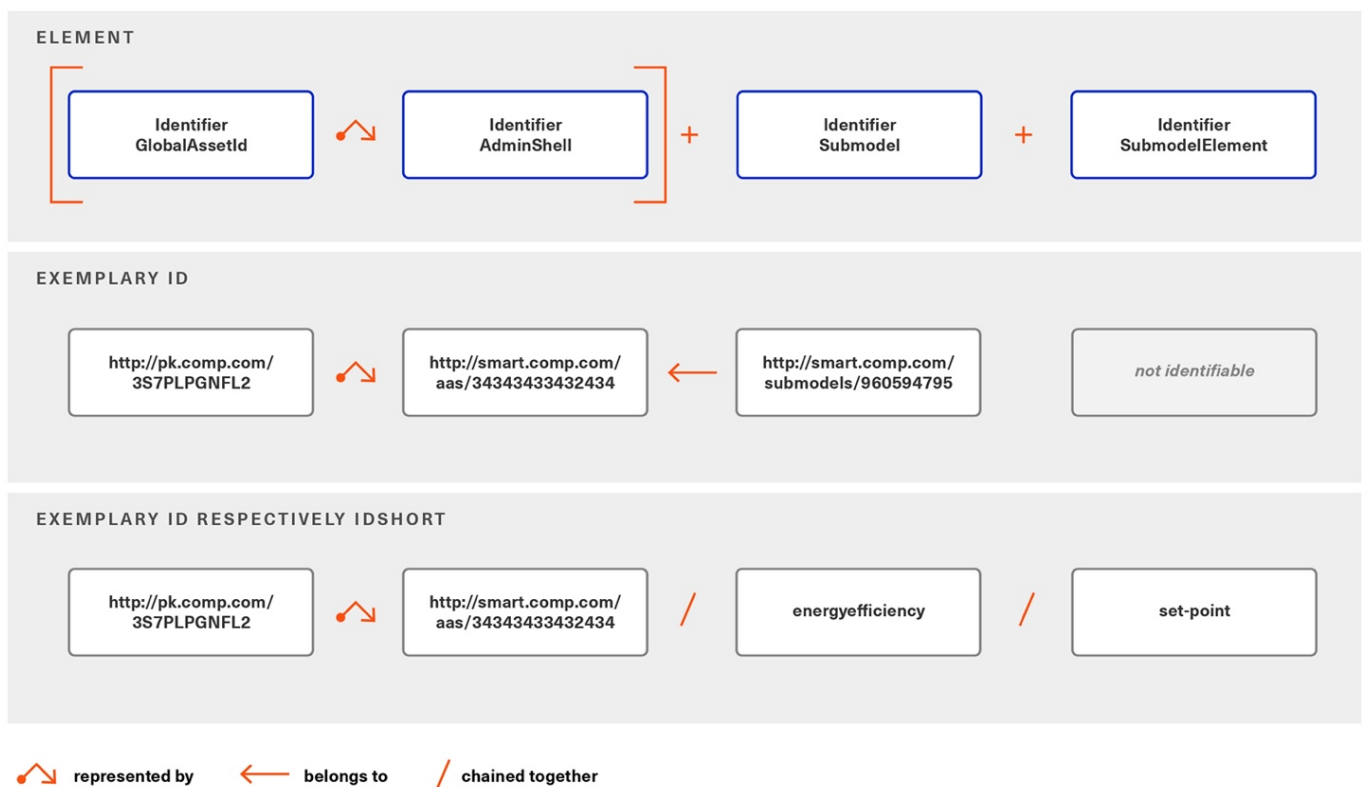


Figure 59. Motivation of Exemplary Identifiers and idShort

To allow such efficient addressing by the chaining of elements by an API of an Administration Shell, *idShort* is provided for a set of classes of the metamodel. It inherits from the abstract class [Referable](#), in order to refer to such

dependent elements.

Before accessing concrete data provided via a submodel, an application typically checks if the Submodel provides the required data, i.e. the semantics of the Submodel is checked for suitability. A so-called [semanticId](#) should be defined for this Submodel as well as the SubmodelElement. This semantic ID helps to easily find the semantic definition of the Submodel (see [Has Semantics Attributes](#)).

Matching Strategies

Matching Strategies for Semantic Identifiers

When comparing two elements, different use cases should be considered in order to define how these two elements are semantically related. This clause gives first hints on the aspects to consider when dealing with matching semantic identifiers. The actual implementations in applications may differ from the strategies presented here. For example, semantic references including context information as represented in IRDI-Path in ECLASS are not yet considered. Sometimes a concept description is derived from another concept description or is identical to or at least compatible with another concept description.

Exact Matching (identical semanticIds) – DEFAULT

- With exact matching, two semantic IDs need to represent two exact matching references (see [Matching Algorithm for References](#)).
 - Example: [Property](#) with [idShort](#) "ManufacturerName" + [semanticId](#) value "0173-1#02-AAO677#002" and [Property](#) with [idShort](#) "Herstellername" + [semanticId](#) value "0173-1#02-AAO677#002" have exactly equal semantics if the [Key/types](#) in both semanticIds are identical plus the other attributes of a [Reference](#) like [type](#) and [referredSemanticId](#) as well. So if the Reference types differ or if the first key type of property "ManufacturerName" is [GlobalReference](#) and the first key type of the semanticId of property "Herstellername" is [ConceptDescription](#) then the two semanticIds are no exact match. Or if the first reference contains a [referredSemanticId](#) value and the second does not the two semantic IDs are not exact matches.

Note 1: Typically, a [Reference](#) for a [semanticId](#) does not have a [referredSemanticId](#)

Value Matching

- With value matching, the key values of the two semantic IDs being compared need to be string-identical, i.e. the two references need to value match (see [Matching Algorithm for References](#)).
 - Example: [Property](#) with [idShort](#) "ManufacturerName" + [semanticId](#) 0173-1#02-AAO677#002 and [Property](#) with [idShort](#) "Herstellername" + [semanticId](#) 0173-1#02-AAO677#002 have value equal semantics.

Intelligent Matching (compatible semanticIds)

Different kinds of intelligent matching may be considered to be implemented. Some are explained in the following.

- Ignore Versioning
 - With intelligent matching, different versions of a concept definition may be matched. For example, if semantic versioning is used to version the concept description, then upward or backward compatible versions can be matched.
 - Example: [property](#) with [idShort](#) "ManufacturerName" + [semanticId](#) 0173-1#02-AAO677#002 and [Property](#) with [idShort](#) "Herstellername" + [semanticId](#) 0173-1#02-AAO677#003 have equal semantics.

Note 2: to compare two semantic IDs, knowledge about versioning needs to be available. In the example above, two IRDIs from ECLASS are compared. ECLASS rules ensure that the semantics is always backward compatible for new versions; a new IRDI would be created for breaking changes.

- Consider different syntax of identifiers
 - With intelligent matching, different syntax of the same identifier may be matched. For example ECLASS allows to specify an identifier of a concept definition as IRDI or as URL. ECLASS and IEC CDD both use IRDIs, however, the limiters are different.
 - Example: `https://api.eclass-cdp.com/0173-1-02-AAC895-008` matches `0173-1#02-AAC895#008`
 - Example: `0173-1#02-AAC895#008` matches `0173/1///02#AAC895#008`
- Consider supplemental semantic IDs (any)
 - With intelligent matching two sets of semantic IDs may be compared: Input is a set of semantic IDs, not distinguishing between `semanticId` and `ref:ROOT:spec-metamodel/common.adoc#HasSemantics[HasSemantics/supplementalSemanticId]`. SupplementalSemanticIds are not ordered, so index information is not relevant. The input matches to an element for which either its `semanticId` is in the Input set of semantic IDs or one of its supplemental IDs matches to ones of the semantic IDs in the Input set.
 - In addition exact or value matching of semantic IDs can be distinguished (see before)
 - Example: Input Set = { `0173/1///02#AAC895#008` } matches for a property with `semanticId` = `https://api.eclass-cdp.com/0173-1-02-AAC895-008` and `supplementalSemanticId` = `0173/1///02#AAC895#008`.
 - Example: Input Set = { `0173-1#02-AAC895#00`, `https://api.eclass-cdp.com/0173-1-02-AAC895-008`, `0173/1///02#AAC895#008` } would match for a property with `semanticId` = `https://api.eclass-cdp.com/0173-1-02-AAC895-008` and no supplemental semantic IDs.
- Consider supplemental semantic IDs (all)
 - With intelligent matching two sets of semantic IDs may be compared: Input is a set of semantic IDs, not distinguishing between `semanticId` and `supplementalSemanticId`. SupplementalSemanticIds are not ordered, so index information is not relevant. The input matches to an element for which all the semantic IDS of the input set are available, either as semantic ID or as supplementalSemanticId.
 - In addition exact or value matching of semantic IDs can be distinguished (see before)
 - Example: Input Set = { `0173/1///02#AAC895#008` } matches for a property with `semanticId` = `https://api.eclass-cdp.com/0173-1-02-AAC895-008` and `supplementalSemanticId` = `0173/1///02#AAC895#008`.
 - Example: Input Set = { `0173-1#02-AAC895#00`, `https://api.eclass-cdp.com/0173-1-02-AAC895-008`, `0173/1///02#AAC895#008` } does not match for a property with `semanticId` = `https://api.eclass-cdp.com/0173-1-02-AAC895-008` and no supplemental semantic IDs.
- Consider supplemental semantic IDs and isCaseOf
 - The two intelligent matching strategies "Consider supplemental semantic IDs (any)" and "Consider supplemental semantic IDs (all)" may be extended to also include the `ref:ROOT:spec-metamodel/concept-description.adoc#ConceptDescription[isCaseOf]` information of a `ref:ROOT:spec-metamodel/concept-description.adoc#ConceptDescription[ConceptDescription]` referenced via one of the semantic IDs (`semanticId` or `supplementalSemanticId`) of an element.
 - Example: Input Set = { `0173/1///02#AAC895#008` } matches for a property with `semanticId` = `[ModelRef](ConceptDescription) https://admin-shell.io.example` if the `isCaseOf` value of the referenced concept description with `id` = `https://admin-shell.io.example` is equal to `0173/1///02#AAC895#008`.
- Consider Semantic Mappings
 - Existing semantic mapping information can be considered for intelligent matching. Semantic mappings may exist within one and the same dictionary, but also between different dictionaries and ontologies.
 - Example: `0112/2///61360_4#AAE530` for nominal capacity of a battery in dictionary IEC CDD and `0173-1#02-AAI048#004` in ECLASS have equal semantics^[4] ^[5].

Note 3: this example does not represent an existing semantic mapping; it is only a candidate.

- Consider Domain Knowledge

- With intelligent matching, domain knowledge available in machine-readable form may be taken into account, such as an "is-a"-relationship between two concept definitions.
- Example: a Hammer drill (0173-1#01-ADS698#010) and a percussion drill (0173-1#01-ADS700#010) are drills for mineral material (0173-1#01-ADN177#005) and are compatible with a request or constraints asking for drills for mineral material.

Matching Algorithm for References

Clause [Matching Strategies for Semantic Identifiers](#) has discussed matching strategies for semantic identifiers. This clause explains matching strategies based on the reference concept (see [Referencing](#)) in more detail and covers other kinds of identifying elements.

For example, the string serialization of references as defined in [Text Serialization of Values of Type "Reference"](#) is used for easier understanding.

Note 4: Matching in this context means supporting a discovery query against an existing model.

A typical query would be to find some element with a specific semantic ID. In this case the data consumer only knows the external ID whereas the provider may have created a duplicate of the concept definition as `ConceptDescription` and a model reference could be used.

Matching does not mean to define equivalence classes that allow to overwrite constraints as defined in the specification for valid instances of the metamodel.

Exact matching of two references

- Two [References](#) are identical if all attributes values are identical.

[Examples for non-matching external references^{\[6\]}](#):

```
(GlobalReference)0173-1#01-ADS698#010, (GlobalReference)0173-1#01-ADS700#010
```

is no exact match for

```
(GlobalReference)0173-1#01-ADS698#010, (FragmentReference)0173-1#01-ADS700#010
```

but a value match.

Value matching of two references

- An external reference A matches an external reference B if all values of all [keys](#) are identical.

Note 5: it is unlikely that a fragment value is identical to a global reference value; it will reference something different.

- A model reference A matches a model reference B if all values of all keys are identical.

Note 6: the key type can be ignored since the fragment keys are always unique (e.g. all `idShorts` of `SubmodelElements` in a `Submodel` or all `SubmodelElements` in a `SubmodelElement` list or collection).

- An external reference A matches a model reference B and vice versa if all values of all keys are identical.
- The [Reference/type](#) and [Reference/referredSemanticId](#) are ignored for matching.

Note 7: since identifiables of the Asset Administration Shell are globally unique, model references are special cases of global references. The only difference is the handling of key types that are predefined for Asset Administration Shell elements. Other key types could be predefined, e.g. for IRDI-Paths etc. However, so far only generic key types are supported.

Note 8: if the values for attribute [referredSemanticId](#) of the two references compared are not identical then there is a mismatch between the two that should be resolved. However, the two are considered to match in the context of discovery.

Note 9 for model reference to model reference matching or external to external reference matching: if the [key types](#) are not identical although all [key values](#) follow the correct order of the key chain, then at least one of the references is buggy and a warning may be issued. Exception: one of the model references uses an abstract class as value for the key type, the other model reference uses a non-abstract class (e.g. SubmodelElement and Property).

The definition of [XML Schema](#) is used for matching

- (Of string or names:) Two strings or names being compared must be identical.
- Characters with multiple possible representations in ISO/IEC 10646 (e.g. characters with both precomposed and base+diacritic forms) match only if they have the same representation in both strings
- No case folding is performed.
- (Of strings and rules in the grammar:) A string matches a grammatical production if it belongs to the language generated by that production.

[Examples for matching external references^{\[7\]}:](#)

(GlobalReference)0173-1#01-ADS698#010, (GlobalReference)0173-1#01-ADS700#010

value-matches

(GlobalReference)0173-1#01-ADS698#010, (FragmentReference)0173-1#01-ADS700#010

[Examples for non-matching external references:](#)

(GlobalReference)https://example.com/aas/1/1/1234859590, (FragmentReference)Specification,
(FragmentReference)Bibliography

does not value-match

(GlobalReference)https://example.com/aas/1/1/1234859590, (FragmentReference)Specification,
(FragmentReference)Bibliographie

since the values of the last fragment differ.

[Examples for matching model references:](#)

Although these two model references would match according to the matching rules, other rules are violated, i.e. that the ID of the Submodel is unique. If the ID of a Submodel is unique, it is not possible that there are two direct SubmodelElement children with the same name (here: Specification). It is also not possible that two different versions of the same Submodel are compared here, because we would then assume that the ID also contains the version information (see [Administrative Information Attributes](#)). The matching algorithm would still identify these two model references as matching although one of them is buggy.

```
(Submodel)https://example.com/aas/1/1/1234859590, (File)Specification
```

matches

```
(Submodel)https://example.com/aas/1/1/1234859590, (Blob)Specification
```

[Examples for matching model and external references:](#)

```
(Submodel)https://example.com/aas/1/1/1234859590
```

matches

```
(GlobalReference)https://example.com/aas/1/1/1234859590
```

Note 10: this kind of Submodel matching might occur if a [SubmodelElement](#) of type [ReferenceElement](#) is matched against a query for this element. It is not allowed to substitute the Submodel references within [AssetAdministrationShell/submodels](#) with an external reference!

```
(Submodel)https://example.com/aas/1/1/1234859590, (File)Specification  
(FragmentReference)Bibliography
```

matches

```
(GlobalReference)https://example.com/aas/1/1/1234859590, (FragmentReference)Specification,  
(FragmentReference)Bibliography
```

Submodel Instances and Templates

Can New or Proprietary Submodels be Formed?

It is in the interest of Industry 4.0 for as many submodels as possible, including free and proprietary submodels, to be formed (see [\[4\]](#), "Free property sets"). A Submodel can be formed at any time for a specific Administration Shell of an asset. The provider of the Administration Shell can form in-house identifiers for the type and instance of the Submodel in line with [Identification of Elements](#). All I4.0 systems are called on to ignore submodels and properties that are not individually known. Hence, it is always possible to deposit proprietary – e.g. manufacturer-specific or user-specific –

information, submodels, or properties in an Administration Shell.

Note: it is the intention of the Administration Shell to include proprietary information, e.g. to link to company-wide identification schemes or information required for company-wide data processing. This way, a single infrastructure can be used to transport standardized and proprietary information at the same time. New information elements can also be conveyed and introduced (and standardized at a later stage).

Creating a Submodel Instance Based on an Existing Submodel Template

A public specification of a Submodel template (e.g. via publication by IDTA) should be available to instantiate an existing Submodel template. In special cases, a Submodel can also be instantiated from a non-public Submodel template, such as a manufacturer specification.

In November 2020, the first two Submodel templates for the Asset Administration Shell were published, one for a nameplate [\[40\]](#) and one for generic technical data [\[39\]](#). Others followed and will follow. Please see [\[45\]](#) for an overview of registered Submodel templates.

The identifiers of concept definitions to be used as semantic references are already predefined in each Submodel template. An instantiation of such a Submodel merely requires the creation of properties with a semantic reference to the property definition and an attached value. The same applies to other subtypes of SubmodelElements.

The only thing that cannot be defined in the template itself is the unique ID of the Submodel instance itself (it is not identical to the ID of the Submodel template), as well as the property values, etc. Templates also define cardinalities, for example whether an element is optional or not. SubmodelElement lists typically contain more than one element: the template contains an exemplary element template; the other elements can be created by copy/paste from this template.

Events

Overview

Events are a very versatile mechanism of the Asset Administration Shell. The following subclauses describe some use cases for events. They summarize different types of events to depict requirements, introduce a *SubmodelElement EventElement* to enable declaration of events of an Asset Administration Shell. Further, the general format of event messages is specified.

Note: the concept of event is still in the experimental phase. Please be aware that backward compatibility cannot be ensured for future versions of the metamodel.

Brief Use Cases for Events Used in Asset Administration Shells

Event use cases are briefly outlined in the following:

- An integrator has purchased a device. Later in time, the supplier of the device provides a new firmware. The integrator wants to detect the offer of a new firmware and wants to update the firmware after evaluating its suitability ("forward events"). A dependent Asset Administration Shell ("D4") detects events from a parent or type Asset Administration Shell ("D1"), which is described by the *derivedFrom* relation. An illustration of the use case is given in [Figure 60](#).
- An integrator/operator operates a motor purchased from a supplier. During operation, condition monitoring incidents occur. Both parties agree on a business model providing availability. The supplier wants to monitor device statuses which are located further in the value chain ("reverse events"). An illustration of the use case is given in [Figure 60](#).

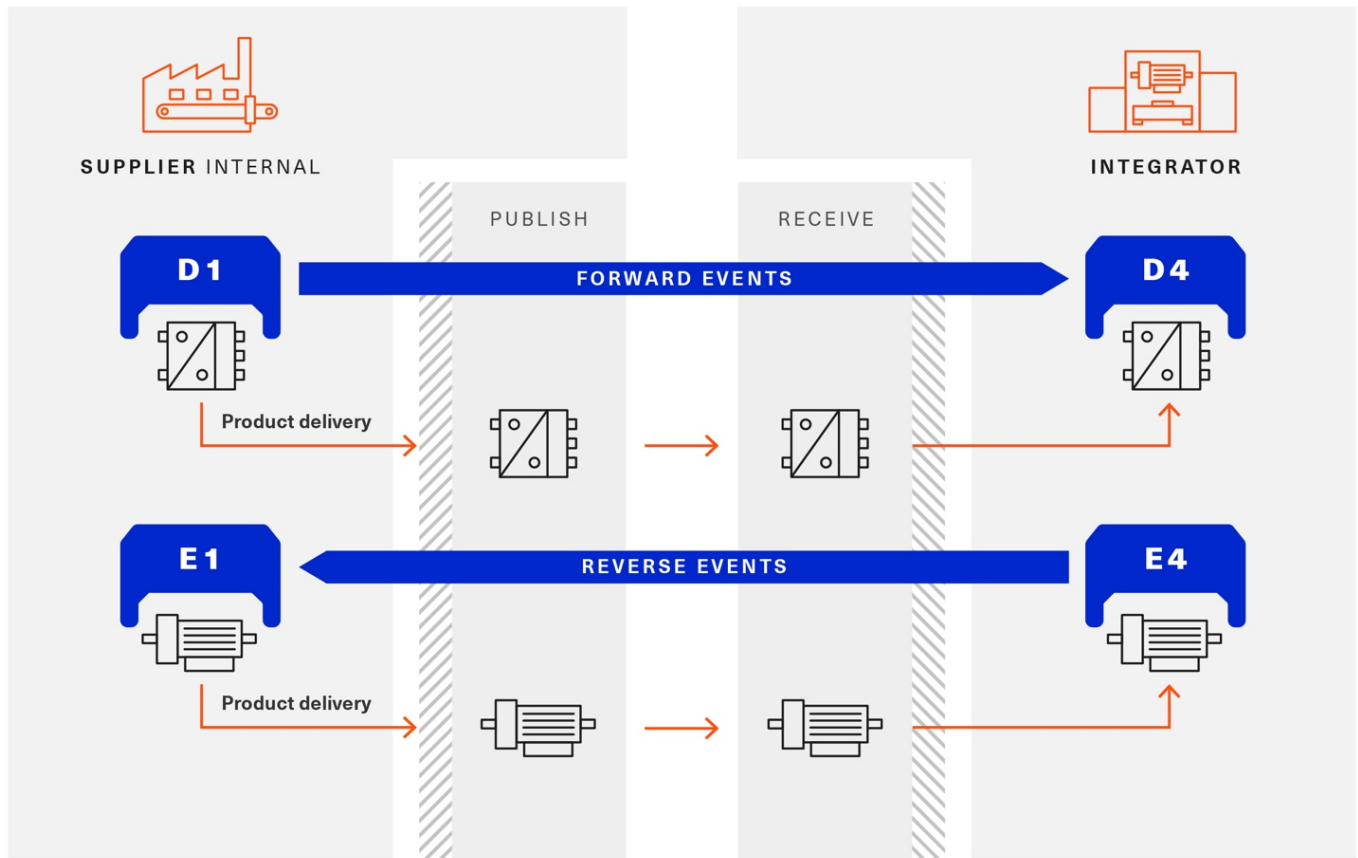


Figure 60. Forward and Reverse Events

- An operator is operating a certain I4.0 component over time. Changes that occasionally occur to these I4.0 components from different systems shall be tracked for documentation and auditing purposes. This can be achieved by recording events over time. An illustration of the use case is given in [Figure 61](#).

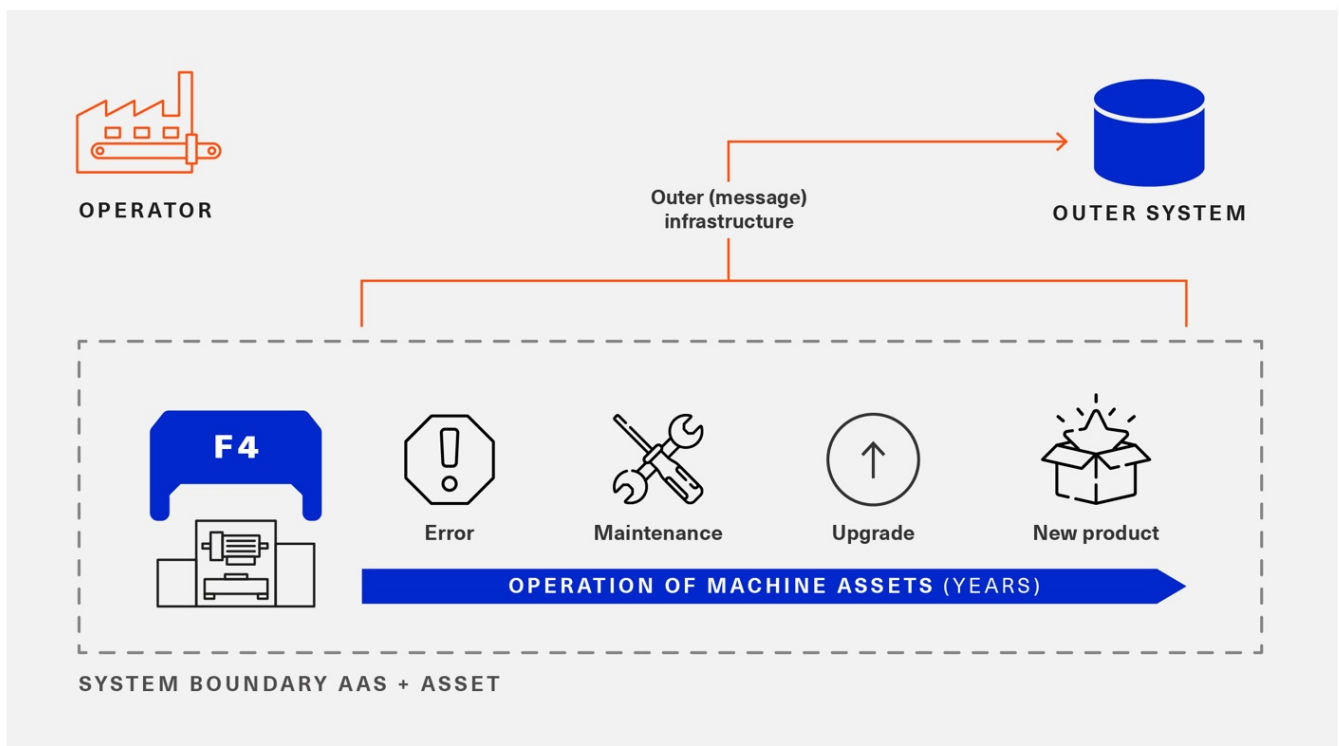


Figure 61. Tracking of Changes via Events

- An operator is operating different I4.0 components, which are deployed to manufacturer clouds. The operator

wants to integrate data from these components, according to DIN SPEC 92222. For this purpose, information needs to be forwarded to the operator cloud ("value push"). An illustration of the use case is given in [Figure 62](#).

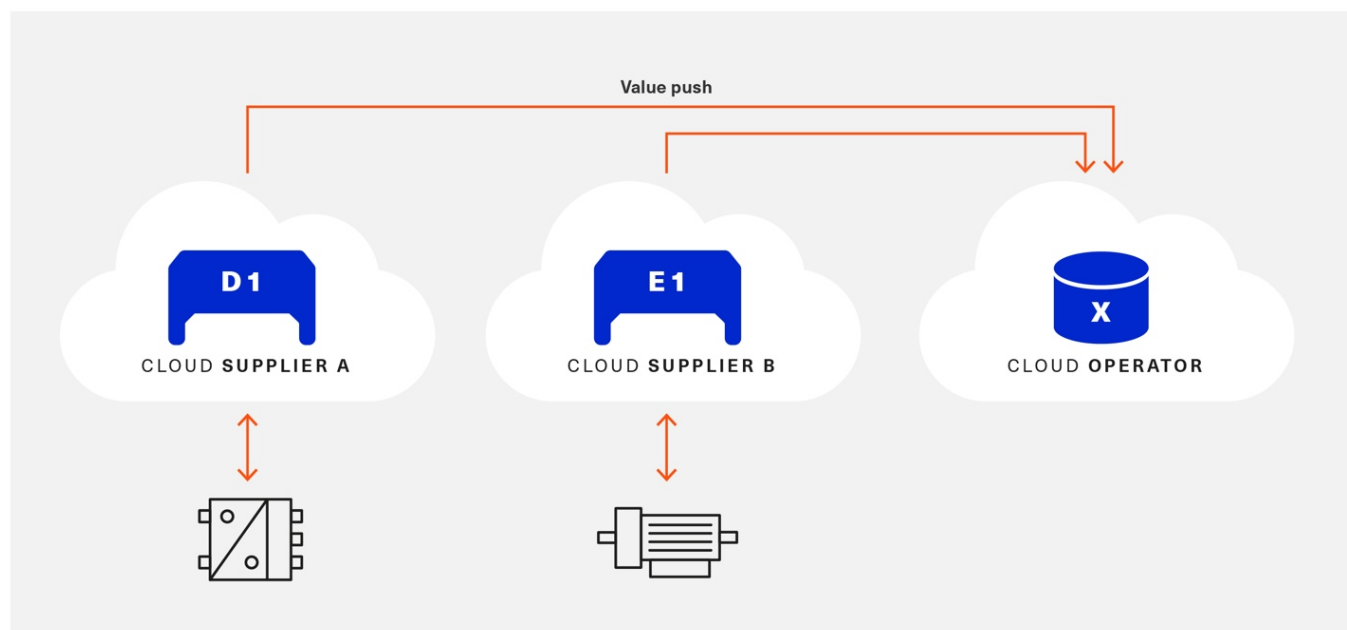


Figure 62. Value Push Events Across Clouds

Input and Output Directions of Events

We can distinguish between incoming and outgoing events. See [Table 15](#) for more information on the event directions.

Table 15. Directions of Events

Direction	Description
Out	The event is monitoring the <i>Referable</i> it is attached to. An outer message infrastructure, e.g. by OPC UA, MQTT or AMQP, will transport these events to other Asset Administration Shells, further outer systems and users.
In	The software entity, which implements the respective <i>Referable</i> , can handle incoming events. These incoming events will be delivered by an outer message infrastructure, e.g. OPC UA, MQTT or AMQP, to the software entity of the <i>Referable</i> .

Types of Events

The uses cases described in [Brief Use Cases for Events Used in Asset Administration Shells](#) need different types of events. Each event type is identified by a *semanticId* and features a specialized payload.

[Table 16](#) gives an overview of types of events. The possible directions of an event are described in [Input and Output Directions of Events](#).

Table 16. Types of Events

Group	Direction	Motivation / Conditions
Structural changes of the Asset Administration Shell	Out	• CRUD^[8] of Submodels, Assets, SubmodelElements, etc.

Group	Direction	Motivation / Conditions
	In	Detect updates on parent/type/derivedFrom Asset Administration Shell
Updates of properties and dependent attribute	Out	- update of values of SubmodelElements - time-stamped updates and time series updates - explicit triggering of an update event
Operation element of Asset Administration Shell	Out	monitoring of (long-lasting) execution of <i>OperationElement</i> and updating events during execution
Monitoring, conditional, calculated events	Out	e.g. when voiding some limits (e.g. stated by Qualifiers with expression semantics)
Infrastructure events	Out	Booting, shutdown, out of memory, etc. of software entity of respective Referable (Asset Administration Shell, Submodel)
Repository events	In/ Out	Change of semantics of IRDIs (associated concept definition)
Security events	Out	- logging events - access violations, unfitting roles and rights, denial of service, etc.
Alarms and events	Out	alarms and events management analog to distributed control systems (DCS)

Custom Event Types

Custom event types can be defined by using a proprietary, but worldwide unique, semanticId for this event type. Such customized events can be sent or received by the software entity of the respective referable, based on arbitrary conditions, triggers, or behavior. While the general format of the event messages needs to comply with this specification, the payload might be completely customized.

Event Scopes

Events can be stated with an *observableReference* to the *Referables* of Asset Administration Shell, *Submodels*, and *SubmodelElements*. These *Referables* define the scope of the events, which are to be received or sent. [Table 17](#) describes the different scopes of an event.

Table 17. Event Scopes

Event attached to ...	Scope
AssetAdministrationShell	This event monitors/represents all logical elements of an Administration Shell, such as <i>AssetAdministrationShell</i> , <i>AssetInformation</i> , <i>Submodels</i> .
Submodel	This event monitors/represents all logical elements of the respective <i>Submodel</i> and all logical dependents.
SubmodelElementList and SubmodelElementCollection and Entity	This event monitors/represents all logical elements of the respective <i>SubmodelElementCollection</i> , <i>SubmodelElementList</i> or <i>Entity</i> and all logical dependents (value or statement resp.).
SubmodelElement (others)	This event monitors/represents a single atomic <i>SubmodelElement</i> , e.g. a data element which might include the contents of a <i>Blob</i> or <i>File</i> .

Value Only Serialization Example

The following example shows the ValueOnly-Serialization for an entire Submodel that validates against the JSON-schema specified in Clause [JSON-Schema for the Value-Only Serialization](#). As mentioned in [JSON-Schema for the Value-Only Serialization](#), *SubmodelElementCollections* cannot be validated within the same schema due to circularity reasons; instead they have their own specific validation schema. An exemplary *SubmodelElementCollection* is added to the following JSON for completeness. It is, however, not validatable against the schema in [JSON-Schema for the Value-Only Serialization](#) due to the reasons mentioned above.

```
{
  "MyPropertyIdShortNumber": 5000,
  "MyPropertyIdShortString": "MyTestStringValue",
  "MyPropertyIdShortBoolean": true,
  "MyMultiLanguageProperty": [
    {
      "de": "Das ist ein deutscher Bezeichner"
    },
    {
      "en": "That's an English label"
    }
  ],
  "MyRange": {
    "min": 3,
    "max": 15
  },
  "MyFile": {
    "contentType": "application/pdf",
    "value": "SafetyInstructions.pdf"
  },
  "MyBlob": {
    "contentType": "application/octet-stream",
    "value": "VGhpcyBpcyBteSBibG9i"
  },
  "MyEntity": {
    "statements": {
      "MaxRotationSpeed": 5000
    },
    "entityType": "SelfManagedEntity",
    "globalAssetId": "http://customer.com/demo/asset/1/1/MySubAsset"
  },
  "MyReference": {
    "type": "ModelReference",
    "keys": [
      {
        "type": "Submodel",
        "value": "http://customer.com/demo/aas/1/1/1234859590"
      },
      {
        "type": "Property",
        "value": "MaxRotationSpeed"
      }
    ]
  }
},
```

```

"MyBasicEvent": {
  "observed": {
    "type": "ModelReference",
    "keys": [
      {
        "type": "Submodel",
        "value": "http://customer.com/demo/aas/1/1/1234859590"
      },
      {
        "type": "Property",
        "value": "CurrentValue"
      }
    ]
  }
},
"MyRelationship": {
  "first": {
    "type": "ModelReference",
    "keys": [
      {
        "type": "Submodel",
        "value": "http://customer.com/demo/aas/1/1/1234859590"
      },
      {
        "type": "Property",
        "value": "PlusPole"
      }
    ]
  },
  "second": {
    "type": "ModelReference",
    "keys": [
      {
        "type": "Submodel",
        "value": "http://customer.com/demo/aas/1/0/1234859123490"
      },
      {
        "type": "Property",
        "value": "MinusPole"
      }
    ]
  }
},
"MyAnnotatedRelationship": {
  "first": {
    "type": "ModelReference",
    "keys": [
      {
        "type": "Submodel",
        "value": "http://customer.com/demo/aas/1/1/1234859590"
      },
      {

```

```

        "type": "Property",
        "value": "PlusPole"
    }
]
},
"second": {
    "type": "ModelReference",
    "keys": [
        {
            "type": "Submodel",
            "value": "http://customer.com/demo/aas/1/0/1234859123490"
        },
        {
            "type": "Property",
            "value": "MinusPole"
        }
    ]
},
"annotations": [
    {
        "AppliedRule": "TechnicalCurrentFlowDirection"
    }
]
},
"MySubmodelElementIntegerPropertyList": [
    1,
    2,
    30,
    50
],
"MySubmodelElementFileList": [
    {
        "contentType": "application/pdf",
        "value": "https://myDomain/MyFirstFile.pdf"
    },
    {
        "contentType": "application/pdf",
        "value": "https://myDomain/MySecondFile.pdf"
    }
],
"MySubmodelElementCollection":
{
    "myStringElement": "That's a string",
    "myIntegerElement": 5,
    "myBooleanElement": true
}
}

```

To support the implementation of DPPs, 8 standards have been developed:

- EN 18219:2026 – Digital product passport – Unique identifiers
- EN 18220:2026 – Digital product passport – Data carriers
- EN 18216:2026 – Digital product passport – Data exchange protocols
- EN 18222:2026 – Digital Product Passport – Application Programming Interfaces (APIs) for the product passport lifecycle management and searchability
- EN 18223:2026 – Digital Product Passport – System interoperability
- EN 18221:2026 – Digital product passport – data storage, archiving, and data persistence
- EN 18239:2026 – Digital Product Passport – access rights management, information system security, and business confidentiality (not yet released)
- EN 18246:2026 – Digital Product Passport – Data authentication, reliability and integrity (not yet released)

This annex specifies how the requirements as specified in

- EN 18223:2026 – Digital Product Passport – System interoperability

are mapped to the AAS Metamodel.

In EN 18216 it is specified that JSON shall be used for syntactic interoperability. In addition to JSON also XML and JSON-LD may be used based on http content negotiation. A JSON-LD representation shall be processable by a regular JSON parser, allowing the possibility of including linked data context for advanced semantic processing.

General

A Digital Product Passport (DPP) is a digital record of product characteristics throughout its life cycle [1]. Example characteristics include environmental sustainability, environmental impact, and recyclability [1].

[Figure 63](#) shows exemplary for the Battery Passport how a DPP is created based on the Asset Administration Shell (AAS): 7 standardized Submodel Template Specifications were created (based on DIN DKE SPEC 91100) to represent the Battery Passport in total (series IDTA-02035). At the point of publication of the requirements for Battery Passport EN 18223 were not yet published.

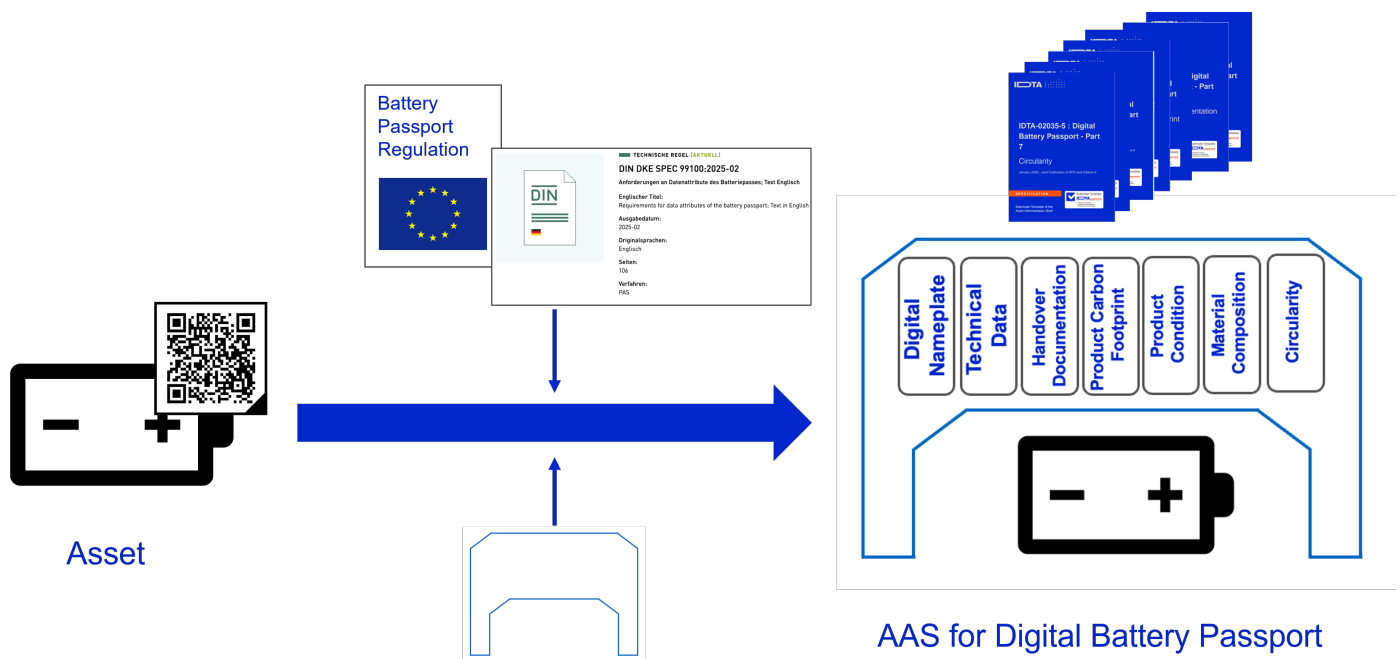


Figure 63. Example: AAS for Digital Battery Passport

To ensure harmonization across different implementations, this document describes a single, recommended approach

for creating a Digital Product Passport (DPP) using an Asset Administration Shell (AAS) as specified in IDTA-01001 and IDTA-01002. While other methods may exist, this document focuses exclusively on this proposed pathway to establish a consistent and interoperable standard between the DPP Metadata Submodel and the other Submodels needed to compose a DPP.

It is important to understand that an Asset Administration Shell (AAS) is not, by itself, the Digital Product Passport as required by EN 18222 or EN 18223. However, a DPP can be easily derived from an existing AAS. The prerequisite is that the AAS contains the submodels supporting the regulation's required data points for the product, as well as the DPP metadata submodel specified in this document.

The Digital Battery Passport provides a clear example of this relationship. It is represented by seven standardized submodel specifications (see [Figure 64](#)). To create the complete passport, these submodels are merged with the DPP metadata submodel defined herein, resulting in a comprehensive Digital Product Passport conformant to regulation.

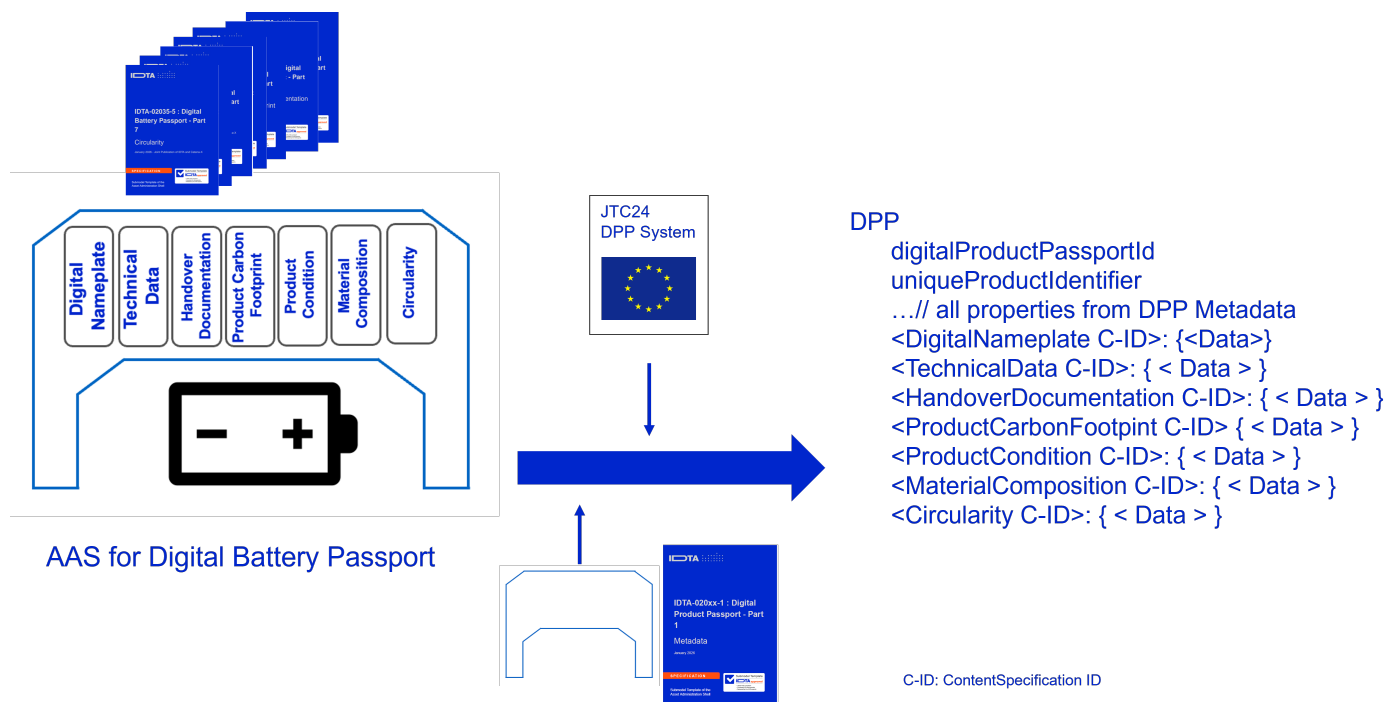


Figure 64. Example: DPP based on AAS for Digital Battery Passport

The primary advantage of using an Asset Administration Shell (AAS) to implement a Digital Product Passport (DPP) is its modular design, which contrasts with the monolithic structure assumed by the JTC24 specification.

An AAS acts as a container for multiple, independent Submodels. Each Submodel has a unique identifier and can be managed and reused separately. This modularity offers significant benefits:

- **Data Reuse:** Information common to many products can be defined once and reused across countless instances.
- **Simplified Access Management:** Permissions can be set for individual Submodels.
- **Efficient Data Onboarding:** New information can be added as a new Submodel without altering the existing structure.

The Battery Passport provides a perfect example. While the regulation requires a passport for every battery, much of the data is identical across batteries of the same type or from the same production facility. With an AAS, you can create a hierarchy of information, where the AAS for a single battery instance reuses Submodels from the AAS of its production facility and its battery type. This same principle allows for standardized Submodels, like contact information, to be reused across entirely different domains.

While the AAS approach is modular, it is designed to produce the single, monolithic JSON document that JTC24 expects. The key is understanding that even this single document must adhere to a set of different schemas. For a DPP to be compliant, it must be validated against at least two types:

- The overall generic schema implicitly defined by JTC24 (derived from EN 18223).

- The specific schema derived from for the relevant vertical regulation (e.g., the Battery Passport "delegated act").
- Specific schemas derived from relevant horizontal regulations.

The AAS framework directly supports this structure. It realizes this by registering new Submodels to an AAS and then adding the payload of those Submodels to the payload of the overall DPP. In essence, the AAS dynamically assembles the required monolithic document by aggregating the data from its various registered Submodels. This allows you to benefit from a modular development and management process while still delivering a compliant, single-file DPP that satisfies all schema requirements.

The process of generating the DPP from an AAS through a sequence of operation calls is detailed in the following subsections and illustrated in [Figure 65](#).

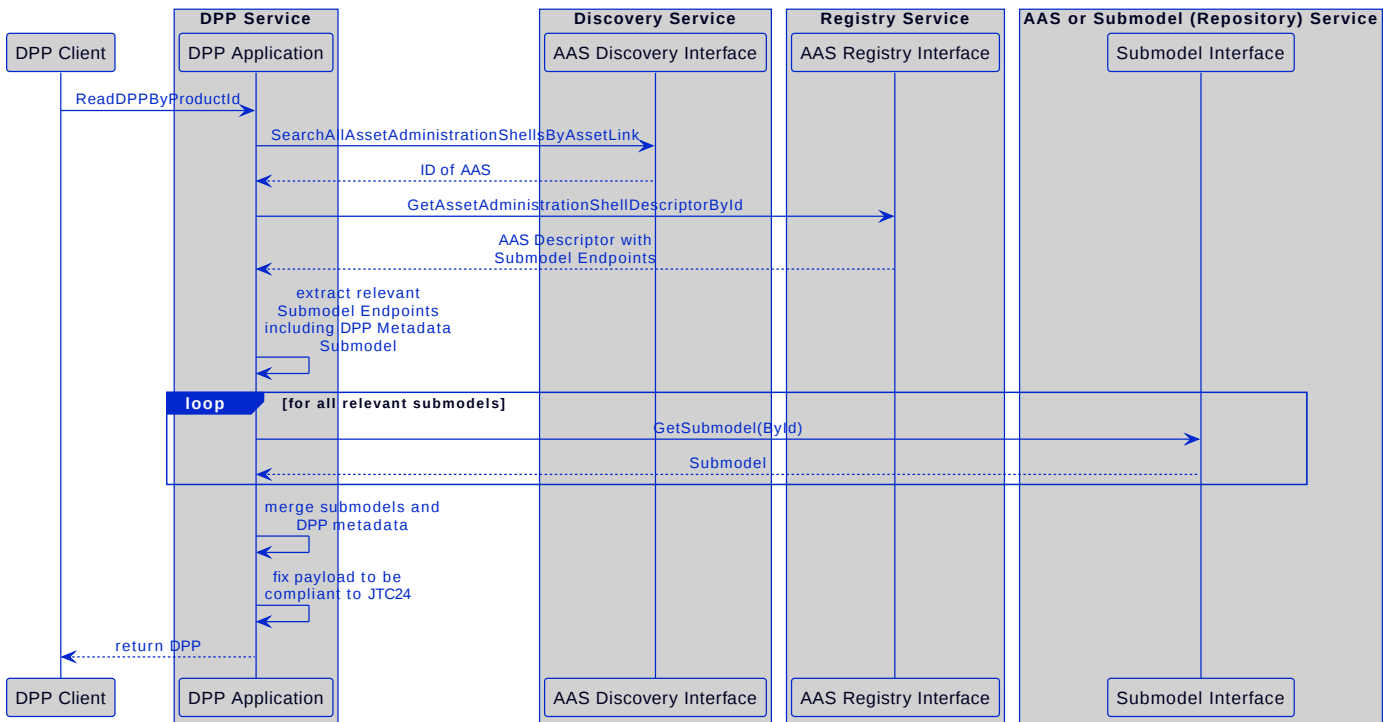


Figure 65. Example: Sequence of Operation Calls and Steps

The sequence diagram included herein is provided for informative purposes only, offering a contextual example to aid in understanding; it should not be considered an exhaustive or normative representation of all possible interactions. For implementation details, readers are directed to the metamodel in Part 1 and the API in Part 2 of the Asset Administration Shell specifications [3].

Data Points of every single DPP

In [Example DPPMetadata JSON Payload^{\[7\]}](#) an example JSON instance of this Submodel Template Specification is shown. It describes a DPP using Submodel Template semanticIds as contentSpecificationIds, here (example) semanticIds for Nameplate, TechnicalData, HandoverDocumentation, ProductCondition, MaterialComposition and Circularity for a specific Product Passport.

Note: While standard EN 18223 provides an illustrative example for the contentSpecificationId ("prEN1234_xyz"), it is important to recognize that this format is forward-looking. To date, no formal standards for vertical-specific digital product passports have been specified. Therefore, in the absence of a definitive specification, this document puts forth a recommendation to ensure a harmonized approach.

Example DPPMetadata JSON Payload^[7]

```

{
  "digitalProductPassportId": "https://www.example.org/dpp/1234545",
  "uniqueProductIdentifier": "https://www.example.org/1234545",

```

```

"granularity": "Item",
"dppSchemaVersion": "EN18223:2026",
"dppStatus": "Active",
"lastUpdate": "2025-08-22T03:12:00Z",
"economicOperatorId": "gxx:ppp456789",
"facilityId": "gxx:xxx987654",
"contentSpecificationIds":[
  "https://admin-shell-io/idta/digitalproductpassport/Nameplate/1",
  "https://admin-shell-io/idta/digitalproductpassport/TechnicalData/1",
  "https://admin-shell-io/idta/digitalproductpassport/HandoverDocumentation/2",
  "https://admin-shell-io/idta/digitalproductpassport/CarbonFootprint/1",
  "https://admin-shell-io/idta/digitalproductpassport/ProductCondition/1",
  "https://admin-shell-io/idta/digitalproductpassport/MaterialComposition/1",
  "https://admin-shell-io/idta/digitalproductpassport/Circularity/1"
]
}

```

Although some attributes (see [Example DPP JSON Payload in compressed serialization](#)) of this Submodel specification can be mapped to attributes in the Asset Administration Shell (AAS) metamodel, the formal recommendation is to instead use this predefined Submodel Template IDTA-02099 for this metadata. This template is derived from the SMT IDTA-02006-4-0 Digital Nameplate. For the corresponding semantic identifiers, please refer to their respective specifications.

The payload required by EN 18223 for the DPP metadata maps to the Value-Only format of this Submodel.

Note: for the other Submodels used to build a DPP EN 18223 allows two different formats "compressed" and "expanded" with compressed being mandatory to be supported. For DPP Metadata there is exactly one correct serialization since it is part of the overall schema and not of a specific content.

In [Table 18](#) the data points of IDTA-02099-1, the DPP Metadata, is mapped to the corresponding elements in IDTA-01001 and IDTA-02006.

Table 18. Mapping JTC24 Meta Data to AAS

EN 18223	IDTA-01001 V3.2	IDTA-02006 V3.0	comment
digitalProductPassportId	https://admin-shell.io/aas/3/2/Identifiable/id AssetAdministrationShell/id	—	Although the ID of the AAS is very similar to the DPP ID they are not necessarily the same because the DPP is a monolithic output whereas the ID of an AAS does not imply a specific set of data in a specific point in time because the Submodels are identifiable
uniqueProductIdentifier	https://admin-shell.io/aas/3/2/AssetInformation/globalAssetId AssetInformation/globalAssetId	URIOfTheProduct	Identifier types allowed are specified in EN 18219

granularity	https://admin-shell.io/aas/3/2/AssetInformation/assetKind assetKind	—	for mapping of enumeration values see Table 19
dppSchemaVersion	—	—	In EN 18223:2026 no Schema is defined and thus there is also no defined schema version. However, the schema may be easily derived from the given JSON and XML examples.
dppStatus	—	—	In EN 1822:2026 no enumeration is specified for the Status, only example values are given like "Active". The AAS does not support administrative information on its status. However, status of the AAS does not need to be identical to the status of the DPP.
lastUpdate	https://admin-shell.io/aas/3/1/AdministrativeInformation/updatedAt AdministrativeInformation/updatedAt	—	EN 18223 does not support explicit versioning (like the AAS does), versioning is supported via the "lastUpdate" attribute in DPPs
economicOperatorId	—	—	Identifier types allowed are specified in EN 18219
facilityId	—	UniqueFacilityIdentifier	Identifier types allowed are specified in EN 18219
contentSpecificationIds	—		This attribute reminds of AssetAdministrationShell/submodels because it lists the data sets relevant for the different DPP(s). A DPP may contain data from several delegated acts, i.e. from different regulations.

Table 19. Mapping EN 18223 granularity to AAS AssetKind

EN 18223 granularity	AAS AssetKind	comment
	https://admin-shell.io/aas/3/2/AssetKind	

Item	Instance	
Model	Type	AAS supports the reuse of Submodels specified on Type Level also on Batch or Instance Level. EN 18223 does not support reuse via its metamodel: reuse is to be taken care of by the Economic Operator or Service Provider.
Batch	Batch	
—	Role	no equivalent in ESPR
—	NotApplicable	not foreseen in ESPR

Metamodel Mapping

In [Figure 66](#) an overview of the metamodel as defined in EN 18223 is shown.

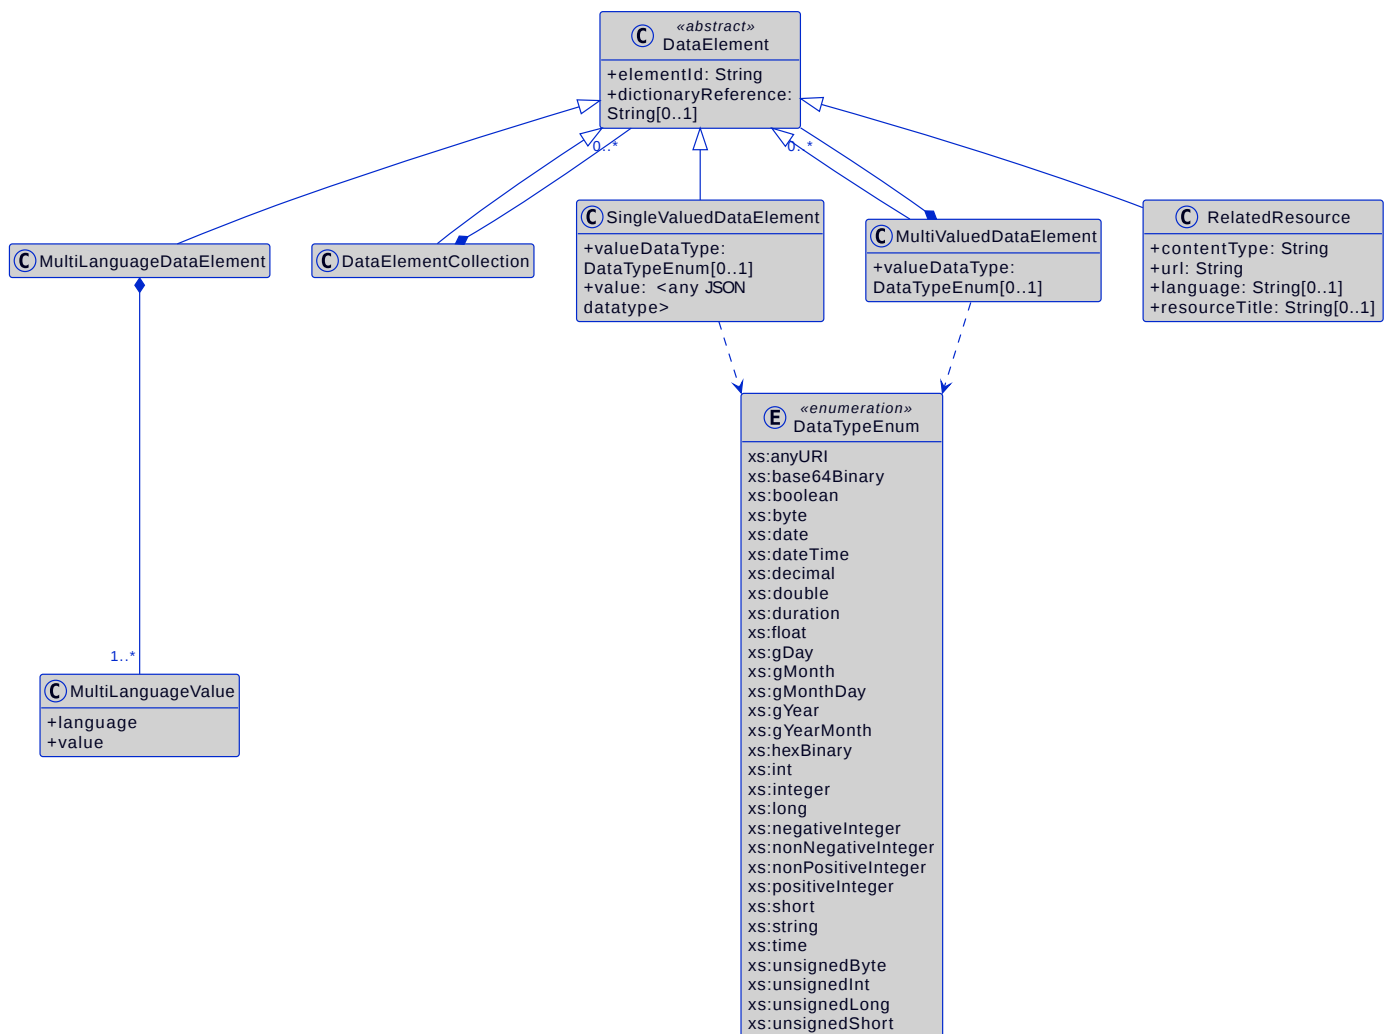


Figure 66. Overview metamodel for data points (EN 18223)

Table 20. Mapping EN 18223 data elements to AAS SubmodelElements

EN 18223	AAS	comment
DataElement (abstract)	https://admin-shell.io/aas/3/2/SubmodelElement SubmodelElement (SME) (abstract)	AAS supports some more SubmodelElement subtypes than EN 18223 but those can be modelled with the means of EN 18223
MultiLanguageDataElement	https://admin-shell.io/aas/3/2/MultiLanguageProperty MultiLanguageProperty	see MultiLanguageDataElement vs. MultiLanguageProperty for topics on serialization
SingleValuedDataElement	https://admin-shell.io/aas/3/2/Property Property https://admin-shell.io/aas/3/2/Blob Blob	A Blob can be realized with a EN 18223 SingleValuedDataElement with valueDataType "xsd:base64Binary"
MultiValuedDataElement	https://admin-shell.io/aas/3/2/SubmodelElementList SubmodelElementList	SubmodelElementLists only with Elements of type MultiLanguageProperty, SubmodelElementCollection, SubmodelElementList, File or Property: they can be directly mapped
DataElementCollection	https://admin-shell.io/aas/3/2/SubmodelElementCollection SubmodelElementCollection	SubmodelElementCollections only with Elements of type MultiLanguageProperty, SubmodelElementCollection, SubmodelElementList, File or Property: they can be directly mapped
RelatedResource	https://admin-shell.io/aas/3/2/File File	see RelatedResource vs. File for topics on serialization
—	https://admin-shell.io/aas/3/2/AnnotatedRelationshipElement AnnotatedRelationshipElement	can be realized with a EN 18223 DataElementCollection
—	https://admin-shell.io/aas/3/2/BasicEventElement BasicEventElement	Events are not supported in EN 18223 but could be realized with a EN 18223 DataElementCollection

EN 18223	AAS	comment
—	https://admin-shell.io/aas/3/2/Capability Capability	not supported in EN 18223
—	https://admin-shell.io/aas/3/2/Entity Entity	can be realized with a EN 18223 DataElementCollection
—	https://admin-shell.io/aas/3/2/Event Event (abstract)	Events are not supported in EN 18223
—	https://admin-shell.io/aas/3/2/Range Range	can be realized with a EN 18223 DataElementCollection
—	https://admin-shell.io/aas/3/2/ReferenceElement ReferenceElement	could be realized with a EN 18223 DataElementCollection and MultiValuedDataElement, however, it is not foreseen in EN 18223 that elements are referenced
—	https://admin-shell.io/aas/3/2/RelationshipElement RelationshipElement	can be realized with a EN 18223 DataElementCollection

Creating of DPP with several Submodels

Given the example data for the DPP in [Example DPPMetadata JSON Payload^{\[7\]}](#) the example is now extended with the data of the corresponding Submodels itself (see [Example DPP JSON Payload in compressed serialization](#)). The JSON element name corresponds directly to the contentSpecificationId. It is the starting point for the corresponding Submodel data.

Example DPP JSON Payload in compressed serialization

```
{
  "digitalProductPassportId": "https://www.example.org/dpp/1234545",
  "uniqueProductIdentifier": "https://www.example.org/1234545",
  "granularity": "Item",
  "dppSchemaVersion": "ENXXX:v1.0",
  "dppStatus": "Active",
  "lastUpdate": "2025-08-22T03:12:00Z",
  "economicOperatorId": "gxx:ppp456789",
  "facilityId": "gxx:xxx987654",
  "contentSpecificationIds": [
    "https://admin-shell-io/idta/digitalproductpassport/Nameplate/1",
    "https://admin-shell-io/idta/digitalproductpassport/TechnicalData/1",
  ]
}
```

```

    "https://admin-shell-io/idta/digitalproductpassport/HandoverDocumentation/2",
    "https://admin-shell-io/idta/digitalproductpassport/CarbonFootprint/1",
    "https://admin-shell-io/idta/digitalproductpassport/ProductCondition/1",
    "https://admin-shell-io/idta/digitalproductpassport/MaterialComposition/1",
    "https://admin-shell-io/idta/digitalproductpassport/Circularity/1"
  ],
  "https://admin-shell-io/idta/alpassport/Nameplate/1":{
    <Data>
  },
  "https://admin-shell-io/idta/digitalproductpassport/TechnicalData/1":{
    <Data>
  },
  "https://admin-shell-io/idta/digitalproductpassport/HandoverDocumentation/2":{
    <Data>
  },
  "https://admin-shell-io/idta/digitalproductpassport/CarbonFootprint/1":{
    <Data>
  },
  "https://admin-shell-io/idta/digitalproductpassport/ProductCondition/1":{
    <Data>
  },
  "https://admin-shell-io/idta/digitalproductpassport/MaterialComposition/1":{
    <Data>
  },
  "https://admin-shell-io/idta/digitalproductpassport/Circularity/1":{
    <Data>
  }
}

```

In [Example AAS Value-Only JSON Payload for Battery Passport, PCF data](#) an example JSON payload conformant to IDTA-02023 Version 1.0 Carbon Footprint (see [CarbonFootprintBattery.json](#)) in Value-Only format is provided. In this case no multi language properties or File elements are contained and this is why this payload is also conformant to the compressed format as specified in EN 18223. [CarbonFootprintBattery-schema.json](#), generated from the Aspect Model conformant to IDTA-01023, is the schema that can be combined with the one of the EN 18223 generic schema.

Example AAS Value-Only JSON Payload for Battery Passport, PCF data

```

{
  "ProductCarbonFootprints":[
    {
      "QuantityOfMeasureForCalculation":5.0,
      "PcfCo2eq":17.2,
      "ReferenceImpactUnitForCalculation": "g",
      "WebLinkToPublicCarbonFootprintStudy":[
        "eOMtThyhVNLWUZNRCBaQK"
      ],
      "PcfCalculationMethods":[
        "ISO 14067"
      ],
      "PerformanceClass": "eOMtThyhVNLWUZNRCBaQKxI",
      "LifeCyclePhases":[
        "C4 - landfill"
      ]
    }
  ]
}

```

```

    ]
  }
]
}

```

So in combination it would be the "semanticId" of SMT IDTA-02035-3 that is "https://admin-shell.io/idta/CarbonFootprint/CarbonFootprint/1/0", (see [Example DPP compressed serialization for Battery Passport, PCF data](#)). The second value to be standardized is the one for the contentSpecificationIds. For details on "contentSpecificationIds" see Submodel Template Specification IDTA-02099-1.

Example DPP compressed serialization for Battery Passport, PCF data

```

{
  "digitalProductPassportId": "https://www.example.org/batterypassport/1234545",
  "uniqueProductIdentifier": "https://www.example.org/1234545",
  "granularity": "Item",
  "dppSchemaVersion": "ENXXX:v1.0",
  "dppStatus": "Active",
  "lastUpdate": "2025-08-22T03:12:00Z",
  "economicOperatorId": "gxx:ppp456789",
  "facilityId": "gxx:xxx987654",
  "contentSpecificationIds": [
    "https://admin-shell.io/idta/CarbonFootprint/CarbonFootprint/1/0"
  ],
  "https://admin-shell.io/idta/CarbonFootprint/CarbonFootprint/1/0": {
    "ProductCarbonFootprints": [
      {
        "QuantityOfMeasureForCalculation": 5.0,
        "PcfCo2eq": 17.2,
        "ReferenceImpactUnitForCalculation": "g",
        "WebLinkToPublicCarbonFootprintStudy": [
          "eOMtThyhVNLWUZRcBaQK"
        ],
        "PcfCalculationMethods": [
          "ISO 14067"
        ],
        "PerformanceClass": "eOMtThyhVNLWUZRcBaQKxI",
        "LifeCyclePhases": [
          "C4 - landfill"
        ]
      }
    ]
  }
}

```

In [Example JTC24 expanded full serialization JSON Payload for Battery Passport, PCF data \(with fewer elements\)](#) an example is shown how a payload similar to the [AAS "Normal"-Format](#) could look like.

Example JTC24 expanded full serialization JSON Payload for Battery Passport, PCF data (with fewer elements)

```

{
  "digitalProductPassportId": "https://www.example.org/batterypassport/1234545",

```

```

"uniqueProductIdentifier": "https://www.example.org/1234545",
"granularity": "Item",
"dppSchemaVersion": "ENXXX:v1.0",
"dppStatus": "Active",
"lastUpdate": "2025-08-22T03:12:00Z",
"economicOperatorId": "gxx:ppp456789",
"facilityId": "gxx:xxx987654",
"contentSpecificationIds": [
  "https://admin-shell.io/idta/CarbonFootprint/CarbonFootprint/1/0"
],
"elements": [
  {
    "elementId": "https://admin-shell.io/idta/CarbonFootprint/CarbonFootprint/1/0",
    "objectType": "DataElementCollection",
    "dictionaryReference": "https://admin-shell.io/idta/CarbonFootprint/CarbonFootprint/1/0",
    "elements": [
      {
        "elementId": "QuantityOfMeasureForCalculation",
        "objectType": "SingleValuedDataElement",
        "dictionaryReference": "https://dictionary1.eu/QuantityOfMeasureForCalculation",
        "valueDataType": "xsd:float",
        "value": 5.0
      }
    ]
  }
]
}

```

For details on DPP serialization (compressed and expanded full) compared to Value-Only and Normal serialization of the AAS see IDTA-01001 Asset Administration Shell Specifications, Part 1.

JSON Serialization Compressed vs. Value-Only

In AAS "Normal" is considered the standard serialization but others are supported as well. In this context especially the mapping "Value-Only" is of interest.

In EN 18223 it is the other way around: what the AAS would call "Value-Only" and is called "compressed" in EN 18223 is mandatory to be provided. Optionally, also a format that is similar to the AAS "Normal" format can be provided by operators, it is referred to as the "expanded" serialization in EN 18223.

MultiLanguageDataElement vs. MultiLanguageProperty

There is one difference in the serialization of multi language data points. In [Example MultiLanguageProperty in Value-Only for AAS](#) it is shown how a MultiLanguageProperty with idShort "title" would be serialized in AAS Value-Only. In [Example MultiLanguageDataElement for EN 18223](#) it is shown how the same example is serialized in EN 18223.

I.e. in AAS it is serialized as described in the following extract:

```

MultiLanguageProperty is serialized as named JSON object with
${MultiLanguageProperty/idShort} as the name of the containing JSON property.

```

The JSON object contains an array of JSON objects for each language of the MultiLanguageProperty with the language as name and the corresponding localized string as value of the respective JSON property.
The language name is defined as two chars according to ISO 639-1.

In EN 18223 the entries within the list are realized like a predefined SubmodelElementCollection with two attributes, "value" and "language".

Example MultiLanguageProperty in Value-Only for AAS

```
"title":[
  {
    "en": "user manual"
  },
  {
    "de": "Kundendokumentation"
  }
]
```

Example MultiLanguageDataElement for EN 18223

```
"title":[
  {
    "value": "user manual",
    "language": "en-IE"
  },
  {
    "value": "Kundendokumentation",
    "language": "de"
  }
]
```

RelatedResource vs. File

The RelatedResource requires or at least enables to provide more information than is required by the SME File: contentType and url hat identical but the optional language and resourceTitle is not supported by AAS SME File.

The EN 18223 in a way models a Document in a very simplified way. This is realized in more depth with all needed meta information of a document in Submodel Template Specification IDTA-02004 Handover Documentation.

Example RelatedResource for EN 18223, localization language en-GB

```
{
  "resourceTitle": "User Manual for the Smart Thermostat Pro",
  "contentType": "application/pdf",
  "url": "https://data.example.com/manuals/thermostat-pro_v2.1.pdf",
  "language": "en-GB"
}
```

```
{
  "contentType": "application/pdf",
  "value": "https://data.example.com/manuals/thermostat-pro_v2.1.pdf"
}
```

In [Example Value-Only of Battery Pass Handover Documentation](#) example code for Value-Only generated for IDTA-02035-2 Digital Battery Passport - Part 2: Handover Documentation (generated from [io.admin-shell.idta.batterypass.handover_documentation/1.0.0](#) but adapted for the example in this document)

Example Value-Only of Battery Pass Handover Documentation

```
{
  "Documents":[
    {
      "DocumentIds":[
        {
          "DocumentIdentifier": "XF90-884",
          "DocumentIsPrimary":true,
          "DocumentDomainId": "1213455566"
        }
      ],
      "DocumentVersions":[
        {
          "DigitalFiles":[
            {
              "value": "https://data.example.com/manuals/thermostat-pro_v2.1.pdf",
              "contentType": "application/pdf"
            }
          ],
          "Title":[
            {
              "en": "User Manual for the Smart Thermostat Pro"
            },
            {
              "de": "Benutzer-Handbuch Smart Thermostat Pro"
            }
          ],
          "Description":[
            {
              "en-GB": "This is the user manual for the Smart Thermostat Pro."
            },
            {
              "de": "Das ist das Benutzer-Handbuch für den Smart Thermostat Pro."
            }
          ],
          "Language":[
            "en-GB",
            "de"
          ],
          "Version": "V1.2"
        }
      ]
    }
  ]
}
```

```

    }
  ],
  "DocumentClassifications": [
    {
      "ClassName": [
        {
          "en": "Operation"
        },
        {
          "de": "Bedienung"
        }
      ],
      "ClassId": "03-02",
      "ClassificationSystem": "VDI2770 Blatt 1:2020"
    }
  ]
}

```

Table 21. Mapping EN 18223 RelatedResource

EN 18223 RelatedResource	AAS SME File	IDTA-02004 Handover Documentation	comment
contentType	https://admin-shell.io/aas/3/2/File/c contentType + contentType	DigitalFile realized with SME File	
url	https://admin-shell.io/aas/3/2/File/v alue + value	DigitalFile realized with SME File	
resourceTitle	—	title	
language	—		localized, i.e. add language. If not existing add a substitute language (if allowed)

JSON Serialization Expanded vs. Normal

The expanded serialization is optional (see EN 18223). The AAS "Normal" serialization and the "expanded" EN 18223 serialization are similar when it comes to the rules of derivation the serialization from the UML model. However, since the UML model differ also the serialization differs.

Table 22. Mapping EN 18223 attributes to AAS

EN 18223	AAS	comment
DataElement/elementId	https://admin-shell.io/aas/3/2/Referable/idShort + Referable/idShort	In AAS there are more restrictions on how to choose the idShort, in EN 18223 the elementId is just a String.

EN 18223	AAS	comment
DataElement/dictionaryReference	https://admin-shell.io/aas/3/2/HasSemantics/semanticId + HasSemantics/semanticId	In EN 18223 the dictionaryReference is just a String, in AAS it is a Reference.
SingleValuedDataElement/valueDataType	https://admin-shell.io/aas/3/2/Property/valueType + Property/valueType	The allowed values are identical in both, the AAS and EN 18223 specification with only one difference: in AAS the prefix "xs:" is used, in EN 18223 the prefix is "xsd".
MultiValuedDataElement/valueDataType	https://admin-shell.io/aas/3/1/SubmodelElementList/valueTypeListElement + SubmodelElementList/valueTypeListElement	
MultiLanguageDataElement	https://admin-shell.io/aas/3/1/MultiLanguageProperty + MultiLanguageProperty	see MultiLanguageDataElement vs. MultiLanguageProperty , compressed and expanded in EN 18223 are identical in this case
RelatedResource	https://admin-shell.io/aas/3/1/File + File	see RelatedResource vs. File , compressed and expanded in EN 18223 are identical in this case

The "objectType" in JSON serialization of AAS is mapped to "objectType" in EN 18223 expanded serialization.

Example expanded EN 18223 for SingleValuedDataElement

```
{
  "elements": [
    {
      "elementId": "maxPressure",
      "objectType": "SingleValuedDataElement",
      "dictionaryReference": "https://dictionary1/maximumPressure",
      "valueDataType": "xsd:float",
      "value": 2.5
    },
    {
      "elementId": "recycledContentPercentage",
      "objectType": "SingleValuedDataElement",
      "dictionaryReference": "https://dictionary1/recycledContentPercentage",
      "valueDataType": "xsd:float",
      "value": 25.5
    }
  ]
}
```

Example AAS "Normal" for Property

```
{
  "elements": [
```

```

{
  "idShort": "maxPressure",
  "modelType": "Property",
  "semanticId": {
    "keys": [
      {
        "type": "GlobalReference",
        "value": "https://dictionary1/maximumPressure"
      }
    ],
    "type": "ExternalReference"
  },
  "valueType": "xs:float",
  "value": "2.5"
},
{
  "idShort": "recycledContentPercentage",
  "modelType": "Property",
  "semanticId": {
    "keys": [
      {
        "type": "GlobalReference",
        "value": "https://dictionary1/recycledContentPercentage"
      }
    ],
    "type": "ExternalReference"
  },
  "valueType": "xs:float",
  "value": "25.5"
}
]
}

```

XML Serialization compressed vs. Value-Only

EN 18223 also defines a XML serialization for the compressed representation (Annex B). The XML serialization is optional (see EN 18216). The AAS does not support a Value-Only serialization for XML, only for JSON. However, a corresponding serialization would be straightforward compared to AAS Value-Only as it is in EN 18223 compared to JSON compressed.

XML Serialization expanded vs. Normal

EN 18223 does not define a XML serialization for the expanded representation.

JSON-LD Serialization

The JSON-LD serialization is optional (see EN 18216). EN 18216 requires that a JSON-LD representation shall be processable by a regular JSON parser, allowing the possibility of including linked data context for advanced semantic processing. However, in EN 18223 no examples or normative text is provided for JSON-LD representation. The AAS does not support a standardized JSON-LD representation.

Backus Naur Form

The Backus-Naur form (BNF) – a meta-syntax notation for context-free grammars – is used to define grammars. For more information see [Wikipedia](#).

A BNF specification is a set of derivation rules, written as

```
<symbol> ::= __expression__
```

where:

- [<symbol>](#) is a [nonterminal](#) (variable) and the [expression](#) consists of one or more sequences of either terminal or nonterminal symbols,
- `::=` means that the symbol on the left must be replaced with the expression on the right,
- more sequences of symbols are separated by the [vertical bar](#) `|`, indicating a [choice](#), the whole being a possible substitution for the symbol on the left,
- symbols that never appear on a left side are [terminals](#), while symbols that appear on a left side are [non-terminals](#) and are always enclosed between the pair of angle brackets `<>`,
- terminals are enclosed with quotation marks: `"text"`. `""` is an empty string,
- optional items are enclosed in square brackets: `[<item-x>]`,
- items existing 0 or more times are enclosed in curly brackets are suffixed with an asterisk (*) such as `<word> ::= <letter> {<letter>}*`,
- items existing 1 or more times are suffixed with an addition (plus) symbol, `+`, such as `<word> ::= {<letter>}+`,
- round brackets are used to explicitly to define the order of expansion to indicate precedence, example: `( <symbol1> | <symbol2> ) <symbol3>`,
- text without quotation marks is an informal explanation of what is expected; this text is cursive if grammar is non-recursive and vice versa.

[Example:](#)

```
<contact-address> ::= <name> "e-mail addresses:" <e-mail-Addresses>

<e-mail-Addresses> ::= {<e-mail-Address>}*

<e-mail-Address> ::= <local-part> "@" <domain>

<name> ::= characters

<local-part> ::= characters conformant to local-part in RFC 5322

<domain> ::= characters conformant to domain in RFC 5322
```

Valid contact addresses:

```
Hugo Me e-mail addresses: Hugo@example.com

Hugo e-mail addresses: Hugo.Me@text.de
```

Invalid contact addresses:

Hugo

Hugo Hugo@ example.com

Hugo@example.com

UML Templates

General

The templates used for element specification are explained in this annex. For details for the semantics see Legend for UML Modelling.

For capitalization of titles, rules according to <https://capitalizemytitle.com/> are used.

Template for Classes

Template 23. Class

Class:	<Class Name> ["<<abstract>>"] ["<<Experimental>>"] ["<<Deprecated>>"] ["<<Template>>"]		
Explanation:	<Explanatory text>		
Inherits from:	{<Class Name> "; " }+ "-"		
ID:	<metamodel element ID>		
Attribute	ID		
	Explanation	Type	Card.
<attribute or association name> ["<<ordered>>"] ["<<Experimental>>"] ["<<Deprecated>>"]	<metamodel element ID>		
	<Explanatory text>	<Type>	<Card>

ID is the metamodel ID of the class or attribute, conformant to the grammar defined in [Text Serialization of Values of Type "Reference"](#). A metamodel ID for a class attribute is concatenated by <ID of metamodel element ID of class>/<relative metamodel element ID>.

The following stereotypes can be used:

- <<abstract>>: Class cannot be instantiated but serves as superclass for inheriting classes
- <<Experimental>>: Class is experimental, i.e. usage is only recommended for experimental purposes because non-backward compatible changes may occur in future versions
- <<Deprecated>>: Class is deprecated, i.e. it is recommended to not use the element any longer; it will be removed in a next major version of the model
- <<Template>>: Class is a template only, i.e. class is not instantiated but used for additional specification purposes (for details see parts 3 of document series)

The following kinds of *Types* are distinguished:

- **<Class>**: Type is an object type (class); it is realized as composite aggregation (composition), and does not exist independent of its parent
- **ModelReference<{Referable}>**: Type is a Reference with *Reference/type=ModelReference* and is called model reference; the {Referable} is to be substituted by any referable element (including *Referable* itself for the most generic case) – the element that is referred to is denoted in the *Key/type=<{Referable}>* for the last Key in the model reference; for the graphical representation see Annex [UML](#) , Figure [Graphical Representation of Shared Aggregation](#); for more information on referencing see [Referencing](#).
- **<Primitive>**: Type is no object type (class) but a data type; it is just a value, see [Primitive Data Types](#)
- **<Enumeration>**: Type is an enumeration, see [Template for Enumerations](#)

Card. is the cardinality (or multiplicity) defining the lower and upper bound of the number of instances of the member element. "*" denotes an arbitrary infinite number of elements of the corresponding Type. "0..1" means optional. "0..*" or "0..3" etc. means that the list may be either not available (optional) or the list is not empty. In the case of "0..3" there are at most 3 elements in the list. "1" means the attribute is mandatory. "1.." or **"1..3" means there is at least 1 element in the list.** The "" denotes as maximum an infinite number of elements of the corresponding type whereas "3" means that there are at most 3 elements in the list - analogous for other numbers.

Note 1: attributes having a default value are always considered to be optional; there is always a value for the attribute because the default value is used for initialization in this case.

Note 2: attributes or attribute elements with data type "string" or "langString" are considered to consist of at least one character.

Note 3: optional lists, i.e. attributes with cardinality > 1 and minimum 0, are considered to consist of at least one element.

[Examples for valid and invalid model references](#)

If class type equal to "ModelReference<Submodel>", the following reference would be a valid reference (using the text serialization as defined in [Text Serialization of Values of Type "Reference"](#)):

```
(Submodel)https://example.com/aas/1/1/1234859590
```

This would be an invalid reference for "ModelReference<Submodel>" because it references a SubmodelElement "Property":

```
(Submodel)https://example.com/aas/1/1/1234859590, (Property)temperature
```

If class type equal to "ModelReference<Referable>", the following references would be valid references (using the text serialization as defined in [Text Serialization of Values of Type "Reference"](#)) because "Property" and "File" are Referables and "Submodel" itself is also Referable since all Identifiables are referable:

```
(Submodel)https://example.com/aas/1/1/1234859590
```

```
(Submodel)https://example.com/aas/1/1/1234859590, (Property)temperature
```

```
(Submodel)https://example.com/aas/1/1/1234859590, (File)myDocument
```

This would be an invalid reference for "ModelReference<Referable>" because FragmentReference is no Referable:

(Submodel)https://example.com/aas/1/1/1234859590, (File)myDocument (FragmentReference)Hints

Template for Enumerations

Template 24. Enumeration

Enumeration:	<Enumeration Name> ["<<Experimental>>"] ["<<Deprecated>>"]	
Explanation:	<Explanatory text>	
Set of:	{<Enumeration> "," }+ "-"	
ID:	<metamodel element ID>	
Literal	Explanation	
enumValue1>["<<Experimental>>"] ["<<Deprecated>>"]	<metamodel value ID>	
	<Explanatory text>	
<enumValue2>["<<Experimental>>"] ["<<Deprecated>>"]	<metamodel value ID>	
	<Explanatory text>	

"**Set of:**" lists enumerations that are contained in the enumeration. It is only relevant for validation, making sure that all elements relevant for the enumeration are considered.

"**Literal**" lists values of enumeration. All values that are element of one of the enumeration listed in "**Set of:**" are listed explicitly as well.

Enumeration values use Camel Case notation and start with a small letter. However, there might be exceptions in case of very well-known enumeration values.

Template for Primitives

Template 25. Primitives

Primitive	ID	
	Definition	Value Examples
<Name of Primitive>	<metamodel ID of Primitive>	
	<Explanatory text>	<Value examples>

UML

OMG UML General

This annex explains the UML elements used in this specification. For more information, please refer to the comprehensive literature available for UML. The formal specification can be found in [\[35\]](#).

[Figure 67](#) shows a class with name "Class1" and an attribute with name "attr" of type *Class2*. Attributes are owned by the class. Some of these attributes may represent the end of binary associations, see also [Figure 75](#). In this case, the instance of *Class2* is navigable via the instance of the owning class *Class1*.^[9]




Figure 67. Class

[Figure 68](#) shows that *Class4* inherits all member elements from *Class3*. Or in other word, *Class3* is a generalization of *Class4*, *Class4* is a specialization of *Class3*. This means that each instance of *Class4* is also an instance of *Class3*. An instance of *Class4* has the attributes *attr1* and *attr2*, whereas instances of *Class3* only have the attribute *attr1*.




Figure 68. Inheritance/Generalization

[Figure 69](#) defines the required and allowed multiplicity/cardinality within an association between instances of *Class1* and *Class2*. In this example, an instance of *Class2* is always related to exactly one instance of *Class1*. An instance of *Class1* is either related to none, one, or more (unlimited, i.e. no constraint on the upper bound) instances of *Class2*. The relationship can change over time.

Multiplicity constraints can also be added to attributes and aggregations.

The notation of multiplicity is as follows:

<lower-bound>.. <upper-bound>

where <lower-bound> is a value specification of type Integer - i.e. 0, 1, 2, ... - and <upper-bound> is a value specification of type UnlimitedNatural. The star character (*) is used to denote an unlimited upper bound.

The default is 1 for lower-bound and upper-bound.




Figure 69. Multiplicity

A multiplicity element represents a collection of values. The default is a set, i.e. it is not ordered and the elements within the collection are unique and contain no duplicates. [Figure 70](#) shows an ordered collection: the instances of *Class2* related to an instance of *Class1*. The stereotype <<ordered>> is used to denote that the relationship is ordered.

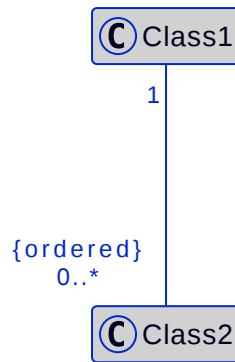


Figure 70. Ordered Multiplicity

[Figure 71](#) shows that the member ends of an association can be named as well, i.e. an instance of *Class1* can be in relationship "relation" to an instance of *Class2*. Vice versa, the instance of *Class2* is in relationship "reverseRelation" to the instance of *Class1*.




Figure 71. Association

[Figure 72](#) depicts two classes connected by a unidirectional association from *Class1* to *Class2*. In this association, only the endpoint is navigable, meaning it is possible to navigate from an instance of *Class1* to an instance of *Class2*, but not the other way around. An instance of *Class1* can be in a 'relation' with an instance of *Class2*, and the association is labeled 'Reference'.




Figure 72. Unidirectional Association

A specialty in [Figure 72](#) is that the label 'Reference' indicates the relationship between *Class1* and *Class2* is of a *Reference* type. This means that an instance of *Class1* holds a reference to an instance of *Class2*. Furthermore, the instance of *Class2* is considered 'referable' according to the Asset Administration Shell metamodel, implying that it inherits from the predefined abstract class 'Referable' in the AAS framework. The structure of a reference to a model element of the Asset Administration Shell is explicitly defined.

[Figure 73](#) shows a composition, also called a composite aggregation. A composition is a binary association, grouping a set of instances. The individuals in the set are typed as specified by *Class2*. The multiplicity of instances of *Class2* to *Class1* is always 1 (i.e. upper-bound and lower-bound have value "1"). One instance of *Class2* belongs to exactly one instance of *Class1*. There is no instance of *Class2* without a relationship to an instance of *Class1*. [Figure 73](#) shows the composition using an association relationship with a filled diamond as composition adornment.



Figure 73. Composition (Composite Aggregation)

Figure 74 shows an aggregation. An aggregation is a binary association. In contrast to a composition, an instance of *Class2* can be shared by several instances of *Class1*. Figure 74 shows the shared aggregation using an association relationship with a hollow diamond as aggregation adornment.



Figure 74. Aggregation

Figure 75 illustrates that the attribute notation can be used for an association end owned by a class. In this example, the attribute name is "attr" and the elements of this attribute are typed with *Class2*. The multiplicity, here "0..*", is added in square brackets. If the aggregation is ordered, it is added in curly brackets like in this example.




Figure 75. Navigable Attribute Notation for Associations

Figure 76 shows a class with three attributes with primitive types and default values. When a property with a default value is instantiated in the absence of a specific setting for the property, the default value is evaluated to provide the initial values of the property.




Figure 76. Default Value

Figure 77 shows that there is a dependency relationship between *Class1* and *Class2*. In this case, the dependency means that *Class1* depends on *Class2* because the type of attribute *attr* depends on the specification of class *Class2*. A dependency is depicted as dashed arrow between two model elements.




Figure 77. Dependency

Figure 78 shows an abstract class. It uses the stereotype <<abstract>>. There are no instances of abstract classes. They are typically used for specific member elements that are inherited by non-abstract classes.



Figure 78. Abstract Class

Figure 79 shows an enumeration with the name "Enumeration1". An enumeration is a data type with its values enumerated as literals. It contains two literal values, "a" and "b". It is a class with stereotype <<enumeration>>. The

literals owned by the enumeration are ordered.




Figure 79. Enumeration

[Figure 80](#) shows how a note can be attached to an element, in this example to class "Class1".



Figure 80. Note

[Figure 81](#) shows how a constraint is attached to an element, in this example to class "Class1".




Figure 81. Constraint

UML Naming Rules

The following rules are used for naming of classes, attributes etc.:

- all names use CamelCase; for exceptions see rules for Enumeration values,
- class names always start with a capital letter,
- attribute names always start with a small letter,
- primitive types start with a capital letter; exception: predefined types of XSD like string,
- enumerations start with a capital letter,
- names of member ends of an association start with a capital letter,
- all stereotypes specific to the Asset Administration Shell specification start with a capital letter, e.g. "<<Deprecated>>"; predefined stereotypes in UML start with a small letter, e.g. "<<abstract>>" or "<<enumeration>>".

In UML, the convention is to name associations and aggregations in singular form. The multiplicity is to be taken into account to decide on whether there are none, a single, or several elements in the corresponding association or aggregation.

Note: a plural form of the name of attributes with cardinality ≥ 1 may be needed in some serializations (e.g. in JSON). In this case, it is recommended to add an "s". In case of resulting incorrect English (e.g. isCaseOf isCaseOfs), it must be decided whether to support such exceptions.

Templates, Inheritance, Qualifiers, and Categories

At first glance, there seems to be some overlapping within the concepts of data specification templates, extensions, inheritance, qualifiers, and categories introduced in the metamodel. This clause explains the commonalities and differences and gives hints for good practices.

In general, an extension of the metamodel by inheritance is foreseen. Templates might also be used as alternatives.

- Extensions can be used to add proprietary and/or temporary information to an element. Extensions do not support interoperability. They can be used as work-around for missing properties in the standard. In this case, the same extensions are attached to all elements of a specific class (e.g. to properties). However, in general, extensions can be attached in a quite arbitrary way. Properties are defined in a predefined way as key values pairs (in this case keys named "name").
- In contrast to extensions, templates aim at enabling interoperability between the partners that agree on the template. A template defines a set of attributes, each of them with clear semantics. This set of attributes corresponds to a (sub-)schema. Templates should only be used if different instances of the class follow different schemas and the templates for the schemas are not known at design time of the metamodel. Templates might also be used if the overall metamodel is not yet stable enough or a tool supports templates but not (yet) the complete metamodel. Typically, all instances of a specific class with the same category provide the same attribute values conformant to the template. In contrast to extensions, the attributes in the template have speaking names.

Note: categories are deprecated and should no longer be used.

- However, when using non-standardized proprietary data specification templates, interoperability cannot be ensured and thus should be avoided whenever possible.
- In case all instances of a class follow the same schema, inheritance and/or categories should be used.
- Categories can be used if all instances of a class follow the same schema but have different constraints depending on their category. Such a constraint might specify that an optional attribute is mandatory for this category (like the unit that is mandatory for properties representing physical values). Realizing the same via inheritance would lead to multiple inheritance – a state that is to be avoided^[10].

Note: categories are deprecated and should no longer be used.

- Qualifiers are used if the structure and the semantics of the element is the same independent of its qualifiers. Only the quality or the meaning of the value for the element differs.
- Value qualifiers are used if only the quantity but not the semantics of the value changes. Depending on the application, either both value and qualifier define the "real" semantics together, or the qualifier is not really relevant and is ignored by the application. Example: the actual temperature might be good enough for non-critical visualization of trends, independent of whether the temperature is measured or just estimated (qualifier would denote: measured or estimated).
- Concept qualifiers are used to avoid multiplying existing semantically clearly defined concepts with the corresponding qualifier information, e.g. life cycle.
- Template qualifiers are used to guide the creation and validation of element instances.

Notes to Graphical UML Representation

Specific graphical modelling rules, which are used in this specification but not included in this form, are explained below ^[35].

[Figure 82](#) shows different graphical representations of a composition (composite aggregation). In Variant A, a relationship with a filled aggregation diamond is used. In Variant B, an attribute with the same semantics is defined. And in Variant C, the implicitly assumed default name of the attribute in Variant A is explicitly stated. This document uses notation B.

It is assumed that only the end member of the association is navigable per default, i.e. it is possible to navigate from an instance of *Class1* to the owned instance of *Class2* but not vice versa. If there is no name for the end member of the association given, it is assumed that the name is identical to the class name but starting with a small letter – compared to Variant C.

Class2 instance only exists if the parent object of type *Class1* exists.

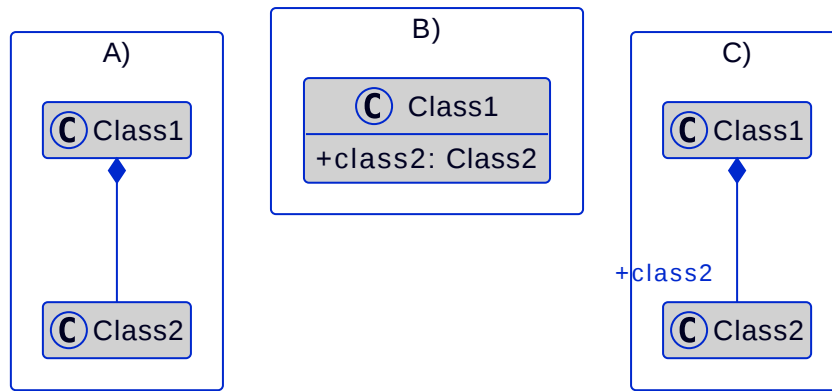


Figure 82. Graphical Representations of Composite Aggregation/Composition

Figure 83 shows a representation of an attribute of type "Reference": *Class1* has an attribute *attr* of type *Reference*. Reference handling is specific to the Asset Administration Shell. An attribute of this type references another class within the model via its identifier. Therefore additionally an association between *Class1* and *Class2* is added to denote that the referenced object shall be an instance of *Class2*.




Figure 83. Graphical Representation of Shared Aggregation

Figure 84 show different graphical representations of generalization. Variant A is the classical graphical representation as defined in [35]. Variant B is a short form. The name of the class that *Class3* is inheriting from is depicted in the upper right corner.

Variant C not only shows which class *Class3* instances are inheriting from, but also what they are inheriting. This is depicted by the class name it is inheriting from, followed by "::" and then the list of all inherited elements – here attribute *class2*. Typically, the inherited elements are not shown.

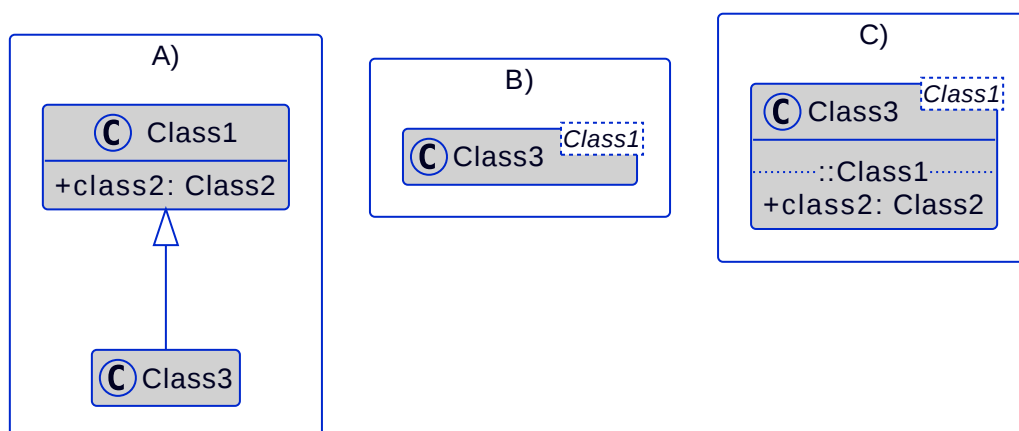


Figure 84. Graphical Representation of Generalization/Inheritance

Figure 85 depicts different graphical notations for enumerations in combination with inheritance. On the left side "Enumeration1" additionally contains the literals as defined by "Enumeration2".

Note 1: the direction of inheritance is opposite to the one for class inheritance. This can be seen on the right side of [Figure 85](#) that defines the same enumeration but without inheritance.

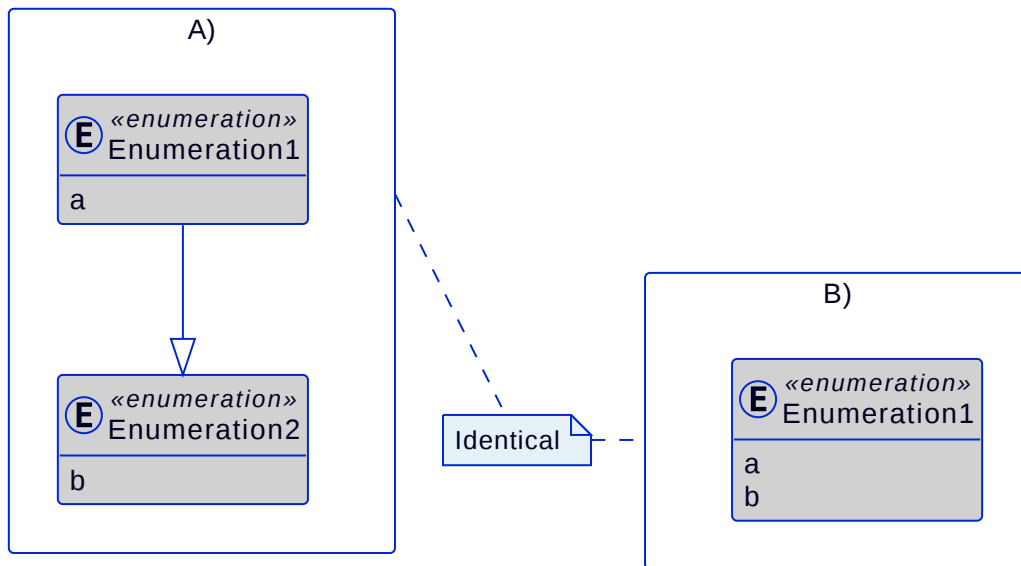


Figure 85. Graphical Representation for Enumeration with Inheritance

Note 2: in this specification all elements of an enumeration are ordered alphabetically.

[Figure 86](#) shows an experimental class, marked by the stereotype "Experimental".




Figure 86. Graphical Representation for Experimental Classes

[Figure 87](#) depicts a deprecated class, which is marked by the stereotype "Deprecated" whereas [Figure 88](#) depicts a deprecated attribute within a class.




Figure 87. Graphical Representation for Deprecated Class




Figure 88. Graphical Representation for Deprecated Attribute

[Figure 89](#) shows a class representing a template. It is marked by the stereotype "Template".




Figure 89. Graphical Representation of a Template Class

Grammar Semantic IDs for Metamodel

Rules for creating identifiers are defined to enable the unique identification of concepts as used and defined in the metamodel of the Asset Administration Shell.

Grammar Semantic Metamodel Identifiers

The following grammar is used to create valid identifiers:

```
<Namespace> ::= <AAS Namespace> | <ID of Data Specification>

<Namespace Qualifier> ::= <AAS Namespace Qualifier> | <Data Specification Qualifier>

<AAS Namespace> ::= <Shell-Namespace> "/aas/" <Version>

<Shell-Namespace> ::= "https://admin-shell.io/"

<Version> ::= {<Digit>}+ "/" {<Digit>}+ [ "/" {<Character>}+ ]

<Digit> ::= "0" | "1" | "2" | "3" | "4" | "5" | "6" | "7" | "8" | "9"

<Character> ::= characters conformant to regular expression [a..zA..Z-]
```

For AAS a predefined namespace qualifier is defined. For data specifications this is defined within the corresponding specifications for single data specifications.

```
<ID of Data Specification> ::= defined per Data Specification

<Data Specification Qualifier> ::= defined per Data Specification

<AAS Namespace Qualifier> ::= "AAS:"
```

Note: the Data Specification ID should include versioning information. Data Specifications defined by the IDTA typically start with the <AAS namespace> as well. Additionally, a sub-namespace is defined following the rules of the [Identification Scheme of the Asset Administration Shell](#).

A concrete unique identifier is defined as follows:

```
<AAS Unique Concept Identifier> ::= (<Namespace> | <Namespace Qualifier>) "/" <AAS Concept Identifier>

<AAS Concept Identifier> ::= <AAS Class Name> [( <AAS Attribute> | <AAS Enumeration>)]

<AAS Attribute> ::= "/" <AAS Attribute Name> [{ "/" <AAS Attribute Name>}* ]

<AAS Enumeration> ::= [{ "/" <AAS Attribute Name>}*] "/" <AAS Enumeration Value>
```

Examples for Semantic Metamodel Identifiers

[Examples for valid unique Asset Administration Shell concept identifiers:](#)

```
https://admin-shell.io/aas/2/0/AssetAdministrationShell/administration/version
```

```
AAS:AssetAdministrationShell/administration/version
```

```
AAS:AssetInformation/assetKind/Instance
```

The application of the pattern is explained in the following.

The concept identifier of a Class follows the pattern

```
<AAS Class name>
```

This also applies to abstract classes and types including enumerations.

[Valid examples:](#)

```
AAS:Submodel
```

```
AAS:Qualifier
```

```
AAS:Reference
```

```
AAS:ContentType
```

```
AAS:KeyTypes
```

Attributes of classes are separated by "/". Inherited attributes can also be referenced in this way, if the concrete referable is important in the context.

Basic Pattern:

```
<AAS Class name>"/"<AAS Attribute Name>
```

Examples^[1]:

```
AAS:Referable/idShort
```

```
AAS:Property/idShort
```

```
AAS:Qualifier/semanticId
```

This also applies to attributes of attributes, if the cardinality of the attributes involved is not greater than 1:

```
<AAS Class Name> "/" <AAS Attribute Name> [{ "/" <AAS Attribute Name>}* ]
```

[Valid examples:](#)

```
AAS:Identifiable/administration/version
```

This also applies to values of enumerations:

```
<AAS Class Name>[{ "/" <AAS Attribute Name>}*][ "/" <AAS Enumeration Value>]
```

[Valid examples:](#)

```
AAS:Key/type/Submodel
```

```
AAS:AasSubmodelElements/Submodel
```

In case of an attribute with a cardinality greater than 1, no further attributes or enumeration values can be added.

[Valid examples:](#)

```
AAS:Operation/inputVariable
```

```
AAS:AssetAdministrationShell/submodel
```

```
AAS:Submodel/submodelElement
```

```
AAS:ConceptDescription/isCaseOf
```

[Invalid examples:](#)

```
AAS:AssetAdministrationShell/submodel/administration/version
```

```
AAS:Submodel/submodelElement/idShort
```

```
AAS:Submodel/Property/idShort
```

Additional identifiers might be needed for specific serializations and mappings, e.g. for a set of Asset Administration Shells or a set of available concept descriptions. Here, the Asset Administration Shell metamodel and specification does not give any recommendations.

Data specification handling is special. Data specification templates do not belong to Part 1 of the Asset Administration Shell. However, serializations only support the predefined data specification templates as stipulated in this specification series, Part 3. Their corresponding name space qualifiers are defined individually.

[Examples:](#)

In xml and JSON, data specifications are embedded into the schema itself using the attribute "embeddedDataSpecification". Here, no concept identifier shall be used.

[Invalid example:](#)

[Valid example:](#)

AAS:DataSpecificationContent

Handling Constraints

Constraints are prefixed with **AASd-** followed by a three-digit number. The "d" in "AASd-" was motivated by "in Detail". The numbering of constraints is unique within namespace AASd; a number of a constraint that was removed will not be used again.

Note: in the Annex listing the metamodel changes, constraints with prefix AASs- or AASc- are also listed. These are security or data specification constraints, and are now part of the split document parts.

Overview Constraints

This annex gives an overview of the constraints contained in this document. No additional comments are added, for details please refer to the normative parts of the specification.

For handling of constraints see [Handling Constraints](#).

Constraint AASd-002: [idShort](#) of [Referables](#) shall consist of at least two characters and shall only feature letters, digits, hyphen ("-") and underscore ("_"); starting mandatory with a letter, and not ending with a hyphen, i.e. `^[a-zA-Z][a-zA-Z0-9_-]*[a-zA-Z0-9_]+$.`

Constraint AASd-005: If [AdministrativeInformation/version](#) is not specified, [AdministrativeInformation/revision](#) shall also be unspecified. This means that a revision requires a version. If there is no version, there is no revision. Revision is optional.

Constraint AASd-006: If both, the `_value_` and the `_valueId_` of a [Qualifier](#) are present, the value shall be identical to the value of the referenced coded value in [Qualifier/valueId](#).

Constraint AASd-007: If both the [Property/value](#) and the [Property/valueId](#) are present, the value of [Property/value](#) shall be identical to the value of the referenced coded value in [Property/valueId](#).

Constraint AASd-012: If both the [MultiLanguageProperty/value](#) and the [MultiLanguageProperty/valueId](#) are present, the meaning must be the same for each string in a specific language, as specified in [MultiLanguageProperty/valueId](#).

Constraint AASd-014: Either the attribute [globalAssetId](#) or [specificAssetId](#) of an `_Entity_` must be set if [Entity/entityType](#) is set to "[SelfManagedEntity](#)".

Constraint AASd-020: The value of [Qualifier/value](#) shall be consistent with the data type as defined in [Qualifier/valueType](#).

Constraint AASd-021: Every qualifiable shall only have one qualifier with the same [Qualifier/type](#).

Constraint AASd-022: [idShort](#) of non-identifiable referables within the same name space shall be unique (case-sensitive).

Constraint AASd-077: The name of an extension ([Extension/name](#)) within [HasExtensions](#) shall be unique.

Constraint AASd-107: If a first level child element in a [SubmodelElementList](#) has a [semanticId](#), it shall be identical to [SubmodelElementList/semanticIdListElement](#).

Constraint AASd-108: All first level child elements in a [SubmodelElementList](#) shall have the same SubmodelElement type as specified in [SubmodelElementList/typeValueListElement](#).

Constraint AASd-109: If [_SubmodelElementList/typeValueListElement_](#) is equal to [AasSubmodelElements/Property](#) or [AasSubmodelElements/Range](#), [SubmodelElementList/valueTypeListElement](#) shall be set and all first level child elements in the [SubmodelElementList](#) shall have the value type as specified in [SubmodelElementList/valueTypeListElement](#).

Constraint AASd-114: If two first level child elements in a [SubmodelElementList](#) have a [semanticId](#), they shall be identical.

Constraint AASd-115: If a first level child element in a [SubmodelElementList](#) does not specify a [semanticId](#), the value is assumed to be identical to [SubmodelElementList/semanticIdListElement](#).

Constraint AASd-116: "globalAssetId" (case-insensitive) is a reserved key for [SpecificAssetId/name](#) with the semantics as defined in <https://admin-shell.io/aas/3/x/AssetInformation/globalAssetId>, x being the minor version of the used specification.

Constraint AASd-117: [idShort](#) of non-identifiable [Referables](#) not being a direct child of a [SubmodelElementList](#) shall be specified.

Constraint AASd-118: If a supplemental semantic ID ([HasSemantics/supplementalSemanticId](#)) is defined, there shall also be a main semantic ID ([HasSemantics/semanticId](#)).

Constraint AASd-119: If any [Qualifier/kind](#) value of a [Qualifiable/qualifier](#) is equal to [TemplateQualifier](#) and the qualified element inherits from [HasKind](#), the qualified element shall be of kind [_Template_](#) ([_HasKind/kind_](#) = [Template](#))

Constraint AASd-121: For [References](#), the value of [Key/type](#) of the first [_key_](#) of [_Reference/keys_](#) shall be one of [GloballyIdentifiables](#).

Constraint AASd-122: For external references, i.e. [References](#) with [_Reference/type_](#) = [ExternalReference](#), the value of [Key/type](#) of the first key of [_Reference/keys_](#) shall be one of [GenericGloballyIdentifiables](#).

Constraint AASd-123: For model references, i.e. [References](#) with [_Reference/type_](#) = [ModelReference](#), the value of [Key/type](#) of the first [_key_](#) of [_Reference/keys_](#) shall be one of [AasIdentifiables](#).

Constraint AASd-124: For external references, i.e. [References](#) with [_Reference/type_](#) = [ExternalReference](#), the last [_key_](#) of [_Reference/keys_](#) shall be either one of [GenericGloballyIdentifiables](#) or one of [GenericFragmentKeys](#).

Constraint AASd-125: For model references, i.e. [References](#) with [Reference/type](#) = [ModelReference](#) with more than one key in [_Reference/keys_](#), the value of [Key/type](#) of each of the keys following the first key of [_Reference/keys_](#) shall be one of [FragmentKeys](#).

Constraint AASd-126: For model references, i.e. [References](#) with [_Reference/type_](#) = [ModelReference](#) with more than one key in [_Reference/keys_](#), the value of [Key/type](#) of the last [Key](#) in the reference key chain may be one of [GenericFragmentKeys](#) or no key at all shall have a value out of [GenericFragmentKeys](#).

Constraint AASd-127: For model references, i.e. [References](#) with [_Reference/type_](#) = [ModelReference](#) with more than one key in [_Reference/keys_](#), a key with [Key/type](#) [_FragmentReference_](#) shall be preceded by a key with [Key/type](#) [_File_](#) or [_Blob_](#). All other Asset Administration Shell fragments, i.e. [Key/type](#) values out of [AasSubmodelElements](#), do not support fragments.

Constraint AASd-128: For model references, i.e. [References](#) with [_Reference/type_](#) = [ModelReference](#), the [Key/value](#) of a [Key](#) preceded by a [Key](#) with [Key/type](#) = [SubmodelElementList](#) is an integer number denoting the position in the array of the SubmodelElement list.

Constraint AASd-129: If any [Qualifier/kind](#) value of a [SubmodelElement/qualifier](#) (attribute [_qualifier_](#) inherited via [Qualifiable](#)) is equal to [TemplateQualifier](#), the SubmodelElement shall be part of a Submodel template, i.e. a [_Submodel_](#) with [Submodel/kind](#) (attribute [_kind_](#) inherited via [HasKind](#)) value equal to [Template](#). Exception: the

SubmodelElement is part of an OperationVariable.

Constraint AASd-130: An attribute with data type "string" shall be restricted to the characters as defined in XML Schema 1.0, i.e. the string shall consist of these characters only: `^[x09x0A\x0D\x20-\uD7FF\uE000-\uFFFD\u00010000-\u0010FFFF]*$`.

Constraint AASd-131: The [globalAssetId](#) or at least one [specificAssetId](#) shall be defined for [AssetInformation](#).

Constraint AASd-133: [SpecificAssetId/externalSubjectId](#) shall be a global reference, i.e. [Reference/type](#) = [ExternalReference](#).

Constraint AASd-134: For an [Operation](#), the [idShort](#) of all [inputVariable/value](#), [outputVariable/value](#), and [inoutputVariable/value](#) shall be unique.

Constraint AASd-137: For external references, i.e. [Reference](#) the value of any [Key/type](#) contained in the Reference shall not be one of [AasReferables](#).

Constraint AASd-138: A [SubmodelElementList](#) within a [Submodel](#) of [kind=Template](#) or as part of an [OperationVariable](#) shall have exactly one element.

Usage Metamodel

Composite I4.0 Components

As described in [Life Cycle with Type Assets and Instance Assets](#), there is a class of relationships between assets of different hierarchy levels. In this class of relationships, automation equipment is explained as a complex, interrelated graph of automation devices and products, performing intelligent production and self-learning/optimization tasks.

Details and examples for composite I4.0 Components can be found in [\[13\]](#).

The following modelling elements in the Asset Administration Shell metamodel can be used to realize such composite I4.0 Components:

- *RelationshipElement*, used to describe relationships between assets and other elements,
- *Submodel*, where a complex asset is composed out of other entities and assets, which are specified in a bill of material together with their relationship to each other.

Note: the Submodel template defining the structure of such a bill of material is not predefined by the Asset Administration Shell metamodel. However, *Entity* elements were designed for the purpose of building bills of material.

- Not every entity (*Entity*) that is part of the bill of material of an asset necessarily has its own Asset Administration Shell. As described in [\[13\]](#), self-managed entities are distinguished from co-managed entities (*Entity/entityType*).
 1. Self-Managed Entities have their own Asset Administration Shell. This is why a reference to this asset is specified via *Entity/globalAssetId* or an *Entity/specificAssetId*. Additionally, further property statements (*Entity/statement*) [\[16\]](#) can be added to the asset that are not specified in the Asset Administration Shell of the asset itself, since they are specified in relation to the composite I4.0 Component only.
 2. There is no separate Asset Administration Shell for co-managed entities. The relationships and property statements of such entities are managed within the Asset Administration Shell of the composite I4.0 Component.

[Figure 90](#) shows an extract of the metamodel containing the most important elements to describe composite I4.0 Components.

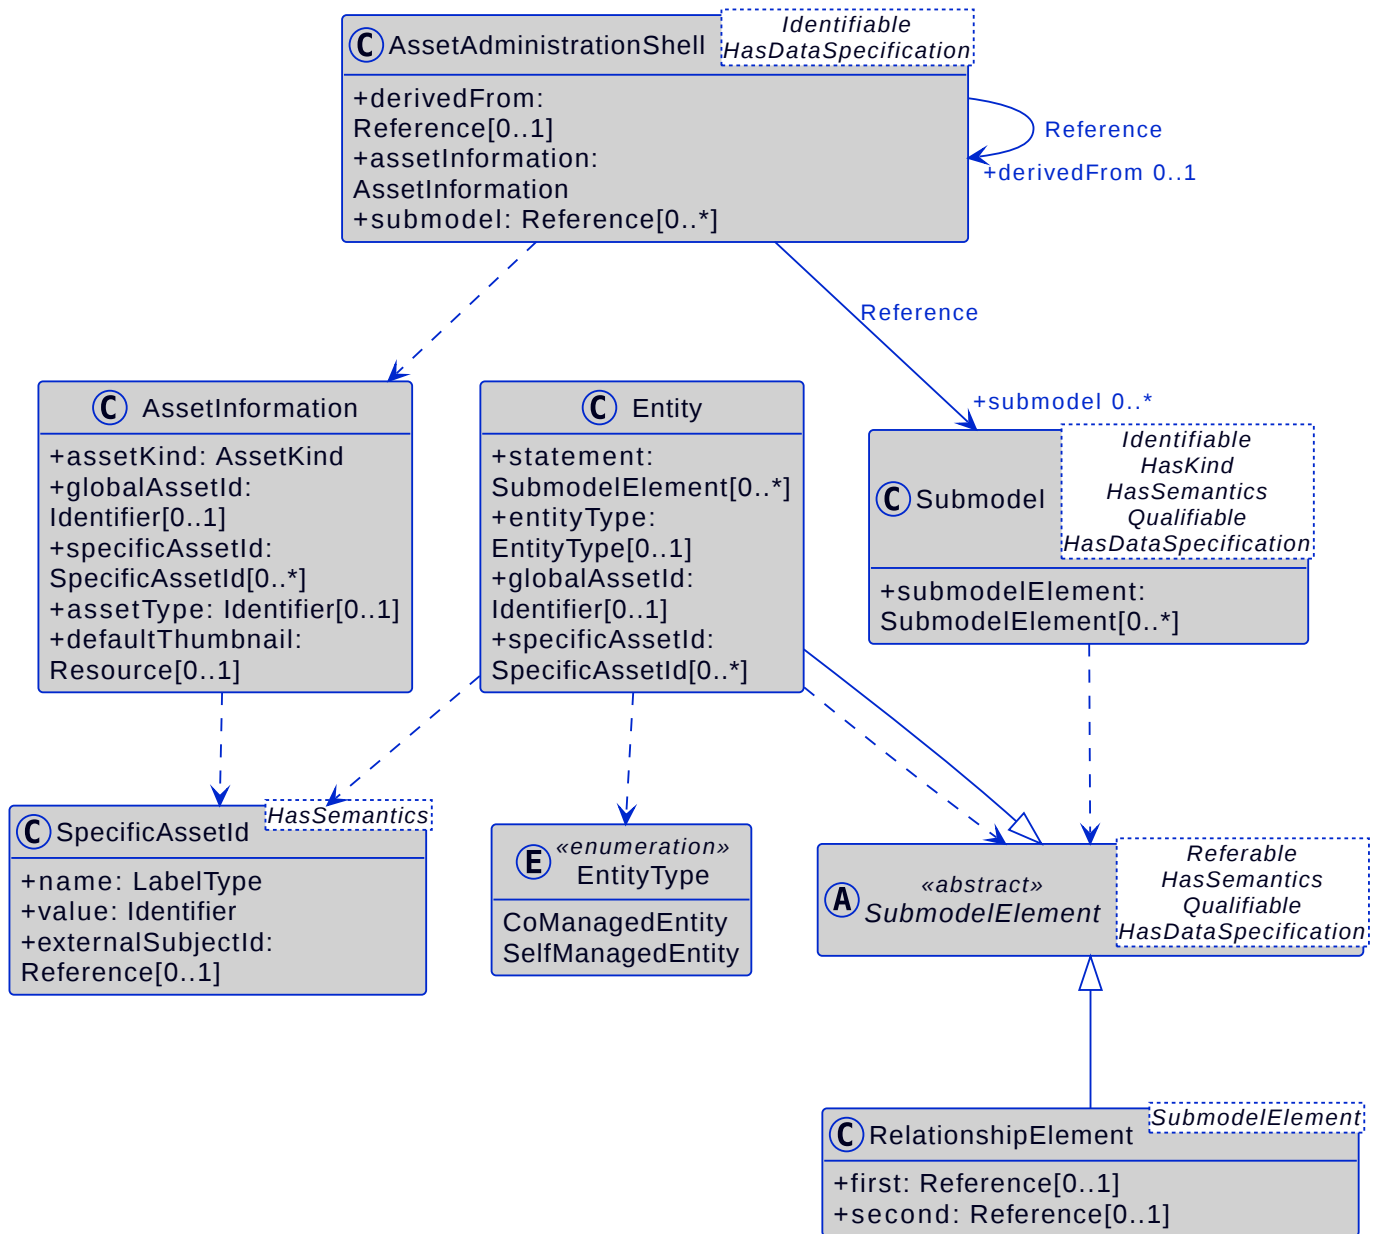


Figure 90. Extract From Metamodel for Composite I4.0 Components

Metamodel With Inheritance

In this annex, some UML diagrams are shown together with all attributes inherited for a better overview.

Failed to generate image: PlantUML preprocessing failed: [From <input> (line 24)]

```
@startuml
!include <c4/C4_Context.puml>
!include <C4/C4>
' C4-PlantUML

...
... ( skipping 45922 lines )
...
+extension: Extension[0..*]
.. ::HasSemantics ..
+semanticId: Reference[0..1]
+supplementalSemanticId: Reference[0..*]
.. ::Qualifiable ..
+qualifier: Qualifier[0..*]
.. ::HasDataSpecification ..
+dataSpecification: Reference[0..*]
}

!include https://raw.githubusercontent.com/admin-shell-io/aas-specs-metamodel/IDTA-01001-3-2_Working/documentation/IDTA- ...
class RelationshipElement<SubmodelElement> {
+first: Reference[0..1]
+second: Reference[0..1]
}
!include https://raw.githubusercontent.com/admin-shell-io/aas-specs-metamodel/IDTA-01001-3-2_Working/documentation/IDTA- ...
class AnnotatedRelationshipElement<RelationshipElement> {
+annotation: DataElement[0..*]
}
!include https://raw.githubusercontent.com/admin-shell-io/aas-specs-metamodel/IDTA-01001-3-2_Working/documentation/IDTA- ...
^^^^^
Cannot open URL

@startuml

!include https://raw.githubusercontent.com/admin-shell-io/aas-specs-metamodel/IDTA-01001-3-2_Working/documentation/IDTA-01001/modules/ROOT/partial/diagrams/classes/submodel-element.puml
abstract class SubmodelElement {
.. ::Referable ..
+idShort: IdShortType[0..1]
+displayName: MultiLanguageNameType[0..1]
+description: MultiLanguageTextType[0..1]
+category: NameType[0..1] <<Deprecated>>
.. ::HasExtensions ..
+extension: Extension[0..*]
```

```

.. ::HasSemantics ..
+semanticId: Reference[0..1]
+supplementalSemanticId: Reference[0..*]
.. ::Qualifiable ..
+qualifier: Qualifier[0..*]
.. ::HasDataSpecification ..
+dataSpecification: Reference[0..*]
}

```

```

!include https://raw.githubusercontent.com/admin-shell-io/aas-specs-metamodel/IDTA-01001-3-2_Working/documentation/IDTA-01001/modules/ROOT/partials/diagrams/classes/relationship-element.puml
!include https://raw.githubusercontent.com/admin-shell-io/aas-specs-metamodel/IDTA-01001-3-2_Working/documentation/IDTA-01001/modules/ROOT/partials/diagrams/classes/annotated-relationship-element.puml
!include https://raw.githubusercontent.com/admin-shell-io/aas-specs-metamodel/IDTA-01001-3-2_Working/documentation/IDTA-01001/modules/ROOT/partials/diagrams/classes/container-element.puml
!include https://raw.githubusercontent.com/admin-shell-io/aas-specs-metamodel/IDTA-01001-3-2_Working/documentation/IDTA-01001/modules/ROOT/partials/diagrams/classes/data-element.puml
!include https://raw.githubusercontent.com/admin-shell-io/aas-specs-metamodel/IDTA-01001-3-2_Working/documentation/IDTA-01001/modules/ROOT/partials/diagrams/classes/property.puml
!include https://raw.githubusercontent.com/admin-shell-io/aas-specs-metamodel/IDTA-01001-3-2_Working/documentation/IDTA-01001/modules/ROOT/partials/diagrams/classes/multi-language-property.puml
!include https://raw.githubusercontent.com/admin-shell-io/aas-specs-metamodel/IDTA-01001-3-2_Working/documentation/IDTA-01001/modules/ROOT/partials/diagrams/classes/range.puml
!include https://raw.githubusercontent.com/admin-shell-io/aas-specs-metamodel/IDTA-01001-3-2_Working/documentation/IDTA-01001/modules/ROOT/partials/diagrams/classes/blob.puml
!include https://raw.githubusercontent.com/admin-shell-io/aas-specs-metamodel/IDTA-01001-3-2_Working/documentation/IDTA-01001/modules/ROOT/partials/diagrams/classes/file.puml
!include https://raw.githubusercontent.com/admin-shell-io/aas-specs-metamodel/IDTA-01001-3-2_Working/documentation/IDTA-01001/modules/ROOT/partials/diagrams/classes/reference-element.puml
!include https://raw.githubusercontent.com/admin-shell-io/aas-specs-metamodel/IDTA-01001-3-2_Working/documentation/IDTA-01001/modules/ROOT/partials/diagrams/classes/capability.puml
!include https://raw.githubusercontent.com/admin-shell-io/aas-specs-metamodel/IDTA-01001-3-2_Working/documentation/IDTA-01001/modules/ROOT/partials/diagrams/classes/submodel-element-list.puml
!include https://raw.githubusercontent.com/admin-shell-io/aas-specs-metamodel/IDTA-01001-3-2_Working/documentation/IDTA-01001/modules/ROOT/partials/diagrams/classes/submodel-element-collection.puml
!include https://raw.githubusercontent.com/admin-shell-io/aas-specs-metamodel/IDTA-01001-3-2_Working/documentation/IDTA-01001/modules/ROOT/partials/diagrams/classes/entity.puml
!include https://raw.githubusercontent.com/admin-shell-io/aas-specs-metamodel/IDTA-01001-3-2_Working/documentation/IDTA-01001/modules/ROOT/partials/diagrams/classes/event-element.puml
!include https://raw.githubusercontent.com/admin-shell-io/aas-specs-metamodel/IDTA-01001-3-2_Working/documentation/IDTA-01001/modules/ROOT/partials/diagrams/classes/basic-event-element.puml
!include https://raw.githubusercontent.com/admin-shell-io/aas-specs-metamodel/IDTA-01001-3-2_Working/documentation/IDTA-01001/modules/ROOT/partials/diagrams/classes/operation.puml

```

```
!include https://raw.githubusercontent.com/admin-shell-io/aas-specs-metamodel/IDTA-01001-3-2_Working/documentation/IDTA-01001/modules/ROOT/partial/diagrams/classes/operation-variable.puml
```

```
AnnotatedRelationshipElement .> DataElement
DataElement <|--- Blob
DataElement <|--- File
DataElement <|--- MultiLanguageProperty
DataElement <|--- Property
DataElement <|--- Range
DataElement <|--- ReferenceElement
Entity ..> SubmodelElement
EventElement <|--- BasicEventElement
Operation ..> OperationVariable
OperationVariable ..> SubmodelElement
RelationshipElement <|--- AnnotatedRelationshipElement
SubmodelElement <|--- AnnotatedRelationshipElement
SubmodelElement <|--- Capability
SubmodelElement <|--- DataElement
SubmodelElement <|--- Entity
SubmodelElement <|--- EventElement
SubmodelElement <|--- Operation
SubmodelElement <|--- RelationshipElement
SubmodelElement <|--- SubmodelElementCollection
SubmodelElement <|--- SubmodelElementList
SubmodelElementCollection ..> SubmodelElement
SubmodelElementList ..> SubmodelElement
@enduml
```

[1] URLs are also URIs

[2] Such additional asset identifiers are contained in *AssetInformation/specificAssetIds*.

[3] Note: in version V1.0 of this specification, *idShort* was optional for identifiable. This changed in V2.0: *idShort* was set to mandatory for all referables. With V3.0, *idShort* was again made optional.

[4] Semantic mapping files are also used in ECLASS between ECLASS Classic and ECLASS Advanced: <https://eclass.eu/support/technical-specification/data-model/basic-advanced-mapping>

[5] This is the format used for semantic mapping in ECLASS: https://eclass.eu/fileadmin/Redaktion/pdf-Dateien/Wiki/ECLASSXML_3.0/ECLASS_XML/mapping.xsd

[6] The example only contains arbitrary IRDIs and does not represent a real-world example.

[7] The example only contains arbitrary IRDIs and does not represent a real-world example.

[8] Create, Retrieve, Update, Delete

[9] Navigability notation was often used in the past according to an informal convention, whereby non-navigable ends were assumed to be owned by the Association whereas navigable ends were assumed to be owned by the Classifier at the opposite end. This convention is now deprecated. Aggregation type, navigability, and end ownership are separate concepts, each with their own explicit notation. Association ends owned by classes are always navigable, while those owned by associations may be navigable or not." [35]

[10] Exception: multiple inheritance is used in this specification, but only in case of inheriting from abstract classes.

[11] For simplicity reasons, most examples use the namespace qualifier and not the full path of the namespace.

Change Notes

General

The change notes list the notable changes made to the document.

Non-backward compatible changes (nc) are marked as such.

- nc="x" means not backward compatible, if no value is added in the table, the change is backward compatible.
- nc="(x)" means that the change made was implicitly contained or stated in the document before and is now being formalized. Therefore, the change is considered to be backward compatible.

The change notes for a version consist of three parts:

- changes w.r.t. previous version,
- new elements in metamodel w.r.t previous version,
- new, changed, or removed Constraints w.r.t previous version.

If there are no changes the corresponding tables are omitted.

Note: before V3.0, the security metamodel (now IDTA-01004) and the predefined data specifications (now IDTA-01003 series) were also part of this document. They had separate sections and tables documenting the changes.

Changes V3.2 vs. V3.1.2

Major Changes:

- CHANGED: attributes for creation and update date in AdministrationInformation ([#484](#))
- CHANGED: value to enumeration AssetKind: Batch to support Digital Product Passports ([#483](#))
- NEW: section in the annex on metamodel and payload mapping for implementing the digital product passport (DPP) based on EN 18223
- NEW: explanatory section added for Value-Only for Operations ([#652](#))
- CHANGED: Value-Only JSON Schema - add referredSemanticId to data type Reference ([#651](#))
- CHANGED: SubmodelElement "Range" - remove conditions "If the min value is missing, the value is assumed to be negative infinite." and "If the max value is missing, the value is assumed to be positive infinite." ([#639](#))
- NEW: Constraint AASd-137 for References ([#592](#))
- NEW: Constraint AASd-138 for SubmodelElementList for OperationVariable ([#462](#))
- CHANGED: Constraint AASd-129, add exception if the SubmodelElement is part of an OperationVariable ([#462](#))
- CHANGED: changed description of Constraint AASd-116, made more generic to avoid frequent updates ([#674](#))
- ADDED: a minimum recursion depth of 32 for Container-Elements should be supported. Note: This means for certification a maximum of 32 recursion test cases should be tested. ([#333](#))
- ADDED: explanatory text for handling of versions and dates in [AdministrativeInformation](#)

Minor Changes:

- CHANGED: description of AASd-002, mention that idShort consists of at least two characters (as specified in regEx) ([#641](#))
- CHANGED: description of data type ContentType changed, some explanations with respect to mime types were removed ([#604](#))
- CHANGED: rename submodel to Submodel and submodel element to SubmodelElement to be conformant to IEC

63278-1 and terms and definitions, this also leads to reformulation of some constraints

- ADDED: Annex UML - add information how to graphically depict attributes of type "Reference" ([#601](#))
- CHANGED: definition of term "capability" ([#649](#))
- ADDED: Note to data type "Identifier" to use existing standards ([#658](#))
- ADDED: Example and Note for Value-Only for SubmodelElementLists in SubmodelElementList: empty lists included ([#644](#))
- NEW: add new note for XML Schema data types compared to IEEE 754 definitions ([#620](#))
- REMOVED: Note 3 to *Operation* since not possible due to Constraint AASd-134: even if the SubmodelElement as the value of an input and an output variable have the same idShort, this does not mean that they are identical or mapped to the same variable since OperationVariables are no referables. The same applies to two input variables or an input variable and an inoutputVariable a.s.o. ([#462](#))
- ADDED: Handling of operations in Submodel with kind=Instance are handled identical to operation in Submodel Templates (Submodel with kind=Template) ([#462](#))
- CHANGED: update bibliography
- CHANGED: editorial changes (including [#600](#), [#636](#), [#637](#), [#638](#))
- NEW: add to [Versioning](#) that bugfix releases are not no necessarily backward compatible
- REMOVED: AdministrativeInformation: remove former Note 2
- ADDED: Note that AdministrativeInformation/templateId only applicable for Submodels so far
- REMOVED: Note for *Property/valueId* that it is recommended to use externa references (was removed already in last release for most similar cases)
- REMOVED: Annex UML - since packages not used any longer remove explanation for UML packages
- CHANGES: editorial

Minor Bugfixes:

- correct ID for AasNonContainerSubmodelElements/Blob
- correct ID for Extension/name
- correct ID for HasSemantics/supplementalSemanticId

Template 26. Changes in Metamodel

Nc	V3.2 Change w.r.t. V3.1.1	Comment
	AssetKind	add new value "Batch" to enumeration AssetKind to support DPP applications

Nc	V3.2 Change w.r.t. V3.1.1	Comment
x	Range	remove conditions "If the min value is missing, the value is assumed to be negative infinite." and "If the max value is missing, the value is assumed to be positive infinite." Note 1: some data types like float do have infinite in its value range per definition and should be used if infinite is needed. Note 2: Range is a SubmodelElement in state "experimental", therefore non-backward-compatible changes are possible

Template 27. New Elements in Metamodel

Nc	New Elements V3.2 vs V3.1	Comment
	AdministrativeInformation/createdAt	add createdAt date attribute to enable performant querying of new objects
	AdministrativeInformation/updatedAt	add updatedAt date attribute to enable DPP methods
	AssetKind/Batch	add new value "Batch" to enumeration AssetKind

Template 28. New, Changed or Removed Constraints

Nc	V3.1 vs. V3.0	New, Update, Removed, Reformulated	Comment
	AASd-002	Update	add "[idShort] shall consist of at least two characters" Constraint AASd-002: <i>idShort</i> of <i>Referables</i> shall consist of at least two characters and shall only feature letters, digits, hyphen ("-") and underscore (""); <i>starting mandatory with a letter, and not ending with a hyphen, i.e. $\wedge[a-zA-Z][a-zA-Z0-9-]*[a-zA-Z0-9_]+\\$.$</i>
	AASd-108	Update	use "SubmodelElement" instead of "submodel element"
	AASd-116	Update	use https://admin-shell.io/aas/3/x/AssetInformation/globalAssetId instead of https://admin-shell.io/aas/3/1/AssetInformation/globalAssetId Constraint AASd-116: "globalAssetId" (case-insensitive) is a reserved key for SpecificAssetId/name with the semantics as defined in https://admin-shell.io/aas/3/x/AssetInformation/globalAssetId, x being the minor version of the used specification.
	AASd-128	Update	use "SubmodelElement" instead of "submodel element"

Nc	V3.1 vs. V3.0	New, Update, Removed, Reformulated	Comment
	AASd-129	Update	• add "Exception: the SubmodelElement is part of an OperationVariable." • use "SubmodelElement" instead of "submodel element" and "Submodel" instead of "submodel" Constraint AASd-129: If any Qualifier/kind value of a SubmodelElement/qualifier (attribute qualifier inherited via Qualifiable) is equal to TemplateQualifier, the SubmodelElement shall be part of a Submodel template, i.e. a Submodel with Submodel/kind (attribute kind inherited via HasKind) value equal to Template. Exception: the SubmodelElement is part of an OperationVariable.
(x)	AASd-137	New	Constraint AASd-137: For external references, i.e. Reference the value of any Key/type contained in the Reference shall not be one of AasReferables .
(x)	AASd-138	New	Constraint AASd-138: A SubmodelElementList within a Submodel of kind=Template or as part of an OperationVariable shall have exactly one element.

Changes V3.1.2 vs. V3.1.1

Bugfixes:

- CHANGED: fix AASd-021 (there was no change compared to V3.0, schemas not affected) ([#624](#))
- CHANGED: make example for idShortPath consistent to ([#618](#))
- CHANGED: fix diagram for DataSpecificationContent: add stereotype "Template"
- CHANGED: fix semantic metamodel ID <https://admin-shell.io/aas/3/1/AasSubmodelElements/Operation> for Operation within AasReferableNonIdentifiables to <https://admin-shell.io/aas/3/1/AasReferableNonIdentifiables/Operation>
- CHANGED: fix syntax error in semantic metamodel ID <https://admin-shell.io/aas/3/1/AAasReferableNonIdentifiables/SubmodelElement> to <https://admin-shell.io/aas/3/1/AasReferableNonIdentifiables/SubmodelElement>
- CHANGED: fix semantic metamodel ID <https://admin-shell.io/aas/3/1/AasSubmodelElements/Blob> for Blob within AasNonContainerSubmodelElements to <https://admin-shell.io/aas/3/1/AasNonContainerSubmodelElements/Blob>
- CHANGED: fix semantic metamodel ID <https://admin-shell.io/aas/3/1/Extension> to <https://admin-shell.io/aas/3/1/Extension/name> for attribute name in class Extension
- CHANGED: fix semantic metamodel ID <https://admin-shell.io/aas/3/1/HasSemantics/supplementalId> for HasSemantics to <https://admin-shell.io/aas/3/1/HasSemantics/supplementalSemanticId>
- CHANGED: fix version number in semantic metamodel ID <https://admin-shell.io/aas/3/0/BlobType> to <https://admin-shell.io/aas/3/1/BlobType> for data type BlobType
- CHANGED: Reference: remove recommendation to use an external reference for the referredSemanticId
- CHANGED: correct references to standards defining qualifiers ([#611](#))
- CHANGED: DIN SPEC 92000 is a DIN DKE SPEC, reference corrected
- CHANGED: bibliography, fix or remove non-working links
- CHANGED: updated references to Submodel Templates Technical Data and Digital Nameplate
- CHANGED: preamble, review process as defined in IDTA
- editorial fixes

Template 29. Changes in Metamodel

Nc	V3.1 Change w.r.t. V3.0.2	Comment
	AasNonContainerSubmodelElements/Blob	fix semantic metamodel ID https://admin-shell.io/aas/3/1/AasSubmodelElements/Blob for Blob within AasNonContainerSubmodelElements to https://admin-shell.io/aas/3/1/AasNonContainerSubmodelElements/Blob
	AasReferableNonIdentifiabiles/Operation	fix semantic metamodel ID https://admin-shell.io/aas/3/1/AasSubmodelElements/Operation for Operation within AasReferableNonIdentifiabiles to https://admin-shell.io/aas/3/1/AasReferableNonIdentifiabiles/Operation
	AasReferableNonIdentifiabiles/SubmodelElement	fix syntax error in semantic metamodel ID https://admin-shell.io/aas/3/1/AAasReferableNonIdentifiabiles/SubmodelElement to https://admin-shell.io/aas/3/1/AasReferableNonIdentifiabiles/SubmodelElement
	BlobType	fix version number in semantic metamodel ID https://admin-shell.io/aas/3/0/BlobType to https://admin-shell.io/aas/3/1/BlobType for data type BlobType
	Extension/name	fix semantic metamodel ID https://admin-shell.io/aas/3/1/Extension to https://admin-shell.io/aas/3/1/Extension/name for attribute name in class Extension

Template 30. New, Changed or Removed Constraints

Nc	V3.1 vs. V3.0	New, Update, Removed, Reformulated	Comment
	AASd-021	Correct	Constraint AASd-021: Every qualifiable can only have one qualifier with the same Qualifier/valueType. corrected to Constraint AASd-021: Every qualifiable shall only have one qualifier with the same Qualifier/type.

Changes V3.1.1 vs. V3.1

Bugfixes:

- CHANGED: fix xml schema w.r.t. ordering of attributes ([#585](#))

Changes V3.1 vs. V3.0.2

Major Changes:

- ADDED: New value "Role" to enumeration AssetKind ([#294](#))
- ADDED: New logical enumerations "AasContainerSubmodelElements" and "AasNonContainerSubmodelElements" ([#420](#))

- CHANGED: Data type Identifier: change length from 2000 to 2048 characters ([#306](#))
- CHANGED: Data type ContentType: change length from 100 to 128 characters
- CHANGED: Referable/idShort and Constraint AASd-002: now also allows hyphens to be included in name ([#295](#))
- CHANGED: Entity/entityType and Constraint AASd-014: entityType now optional ([#287](#))
- CHANGED: Change RelationshipElement: attributes "first" and "second" now optional (conformant to "min" and "max" of "Range")([#412](#)), AnnotatedRelationshipElement inherits from RelationshipElement and is thus also affected.
- CHANGED: Change File and Blob: attribute "contentType" now optional ([#412](#))
- CHANGED: Value-Only Schema adapted to changes in classes Entity, RelationshipElement etc.
- REMOVED: remove AASd-120: idShort also allowed for elements within a SubmodelElementList ([#432](#))
- REMOVED: remove AASd-090: category is deprecated ([#514](#))
- CHANGED: Relaxation of grammar for semantic IDs for metamodel elements in the context of data specifications ([#307](#))
- CHANGED: Terms and Definitions adopted to IEC 63278-1:2023 (before IEC 63278-1 Draft July 2022 was the basis), ([#365](#)) also abbreviations partly adopted; changes:
 - CHANGED: asset
 - CHANGED: digital representation (example only)
 - REMOVED: ontology
 - CHANGED: service
 - REMOVED: smart manufacturing
 - CHANGED: Submodel
 - CHANGED: Submodel template
 - CHANGED: Submodel template element
 - REMOVED: technical functionality
- CHANGED: Terms and Definitions, updates:
 - CHANGED: Note 7 removed from term "property"
- CHANGED: Update clause on matching algorithm for references, include handling of supplementalSemanticIds, isCaseOf etc. ([#350](#), [#471](#), [#473](#), [#479](#), [#347](#))
- ADDED:(Editorial) Adding metamodel element IDs to tables themselves for easier usage (besides grammar defining how to derive them) ([#366](#))
- CHANGED: Update all metamodel element IDs to V3.1 ([#366](#))
- CHANGED: Transfer of clauses on formats Metadata, Paths and Value-Only from Part 2 API to Part 1 Metamodel ([#325](#))
- CHANGED: (Editorial) Update clause on Value-Only Serialization, improve documentation ([#370](#), [#371](#), [#411](#))
 - ADDED: add table similar to metadata table: which attributes are displayed in Value-Only serialization
 - CHANGED: update examples to provide Value-Only serialization for every submodel element (not in the context of a Submodel as before)
 - ADDED: add clause for Submodel Example (with properties from SMT Technical Data, not Families any longer)
- CHANGED: update Schema for JSON-Value Serialization ([#389](#))
- REMOVED: remove recommendation to use external references for semanticId ([#376](#)) and related attributes like valueId, semanticIdListElement and isCaseOf ([#396](#), [#396](#))
- REMOVED: remove clauses on OPC UA and AutomationML mappings ([#373](#), [#397](#))

- CHANGED: update explanatory text and notes in the context of AdministrativeInformation ([#331](#))
- CHANGED: move chapter "General" to Annex
- REMOVED: remove Annex "Requirements"
- CHANGED: move Clause "Semantic Identifiers for Metamodel and Data Specifications" from main part to Annex
 - CHANGED: no plural 's' any longer, i.e. only semantic identifiers for attributes and classes
- CHANGED: Transfer from .docx to asciidoc (.adoc) and maintenance in GitHub (including ([#318](#), [#316](#))
- CHANGED: Transfer of all UML figures to PlantUML (.puml), changed notation for model references; maintenance in GitHub, no XML presentation part of release any longer ([#439](#))

Bugfixes:

- CHANGED: add missing <referredSemanticId> to grammar for textual representation of References [#557](#))
- CHANGED: enhance and correct examples for LangStringSet so that they correspond to their concrete serialization in XML, JSON and RDF

Editorial Bugfixes:

- CHANGED: improve formulation of constraints, use "shall" instead of "needs to" etc.

Minor Changes:

- CHANGED: add new data type "DateTimeUtc" and use it for attribute *lastUpdate* of *BasicEventElement* and attribute *timeStamp* of *EventPayload* ([#498](#))
- add Annex with overview of constraints ([#509](#))
- CHANGED: update Constraint AASd-116 ([#298](#))
- REMOVED: remove information on OPC UA mapping ([#373](#))
- REMOVED: remove information on AutomationML mapping ([#397](#))
- REMOVED: remove notes or change notes to paragraphs in Annex "General"
- CHANGED: update bibliography (newer versions, link update, removal of entries not referenced)
- CHANGED: consistent usage of idShortPath and IRDI-Path ([#385](#))
- ADDED: add example for deprecated attribute in class in Annex UML
- ADDED: enhanced explanation for AASd-130
- CHANGED: change explanation of Entity/statement to singular for consistency
- REMOVED: AdministrativeInformation - remove note 2: since submodels with different versions shall have different identifiers, it is possible that an Asset Administration Shell has two submodels with the same semanticId but different versions.
- REMOVED: remove [23] from bibliography and remove corresponding notes referring to it
- REMOVED: statement w.r.t. CLSID
- CHANGED: editorial changes (including [#345](#), [#361](#), [#385](#))

Metamodel Changes V3.1 vs. V3.0.2

Template 31. Changes in Metamodel

Nc	V3.1 Change w.r.t. V3.0.2	Comment
	AssetKind	Add new value "Role" to enumeration AssetKind

Nc	V3.1 Change w.r.t. V3.0.2	Comment
	BasicEventElement/lastUpdate	change data type from <i>dateTime</i> to <i>DateTimeUtc</i>
	Blob/contentType	now optional
	ContentType	data type: change length from 100 to 128 characters
	Entity/entityType	now optional
	EventPayload/timeStamp	change data type from <i>dateTime</i> to <i>DateTimeUtc</i>
	File/contentType	now optional
	Identifier	data type: change length from 2000 to 2048 characters
	Referable/idShort	implicit change because constraint AASd-002 now also allows hyphen
	RelationshipElement/first	now optional
	RelationshipElement/second	now optional

Template 32. New Elements in Metamodel

Nc	New Elements V3.1 vs V3.0.2	Comment
	AasContainerSubmodelElements	New enumeration for container submodel elements
	AasNonContainerSubmodelElements	New enumeration for non-container submodel elements
	DateTimeUtc	New data type
	AssetKind/Role	New value in enumeration

Template 33. New, Changed or Removed Constraints

Nc	V3.1 vs. V3.0	New, Update, Removed, Reformulated	Comment
	AASd-002	Update	now also allows hyphens to be included in name Constraint AASd-002: <i>idShort</i> of <i>Referables</i> shall only feature letters, digits, hyphen ("-") and underscore (""); <i>starting mandatory with a letter, and not ending with a hyphen, i.e. ^[a-zA-Z][a-zA-Z0-9-]*[a-zA-Z0-9_]+\$.].</i>

Nc	V3.1 vs. V3.0	New, Update, Removed, Reformulated	Comment
	AASd-006	Update	use "shall" instead of "need" Constraint AASd-006: If both, the value and the valueId of a Qualifier are present, the value needs to be identical to the value of the referenced coded value in Qualifier/valueId. changed to Constraint AASd-006: If both, the value and the valueId of a Qualifier are present, the value shall be identical to the value of the referenced coded value in Qualifier/valueId.
	AASd-007	Update	use "shall" instead of "need" Constraint AASd-007: If both the Property/value and the Property/valueId are present, the value of Property/value needs to be identical to the value of the referenced coded value in Property/valueId. changed to Constraint AASd-007: If both the Property/value and the Property/valueId are present, the value of Property/value shall be identical to the value of the referenced coded value in Property/valueId.
	AASd-014	Update	Change since Entity/entityType is now optional Constraint AASd-014: Either the attribute globalAssetId or specificAssetId of an Entity must be set if Entity/entityType is set to "SelfManagedEntity".
	AASd-021	Update	use "shall" instead of "can" Constraint AASd-021: Every qualifiable can only have one qualifier with the same Qualifier/valueType. changed to Constraint AASd-021: Every qualifiable shall only have one qualifier with the same Qualifier/valueType.
	AASd-077	Update	use "shall" instead of "need" Constraint AASd-077: The name of an extension (Extension/name) within HasExtensions needs to be unique. changed to Constraint AASd-077: The name of an extension (Extension/name) within HasExtensions shall be unique.
	AASd-090	Removed	Constraint AASd-090: For data elements, category (inherited by Referable) shall be one of the following values: CONSTANT, PARAMETER or VARIABLE. Default: VARIABLE

Nc	V3.1 vs. V3.0	New, Update, Removed, Reformulated	Comment
	AASd-116	Update	Update version of globalAssetId Constraint AASd-116: "globalAssetId" (case-insensitive) is a reserved key for SpecificAssetId/name with the semantics as defined in https://admin-shell.io/aas/3/1/AssetInformation/globalAssetId .
	AASd-120	Removed	Constraint AASd-120: idShort of submodel elements being a direct child of a SubmodelElementList shall not be specified.

Changes V3.0.2 vs. V3.0.1

Major Bugfixes:

- CHANGED: Environment does not inherit from "Reference" (figure and schemas were correct)

Other Bugfixes:

- CHANGED: Replace xs:dateType with xs:dateTime ([#467](#))
- CHANGED: Improve description of example for Reference ([#481](#))
- CHANGED: UML Template description with respect to cardinality ([#388](#))
- CHANGED: Constraint AASd-119 Class name is "HasKind", not "hasKind"

Metamodel Changes V3.0.2 vs. V3.0.1

Template 34. Changes in Metamodel

Nc	V3.0.2 Change w.r.t. V3.0.1	Comment
(x)	Environment	does not inherit from "Reference"

Template 35. New, Changed or Removed Constraints

Nc	V3.0.2 vs. V3.0.1	New, Update, Removed, Reformulated	Comment
	AASd-119	Update	correct class name from "hasKind" to "HasKind" Constraint AASd-119: If any <i>Qualifier/kind</i> value of a <i>Qualifiable/qualifier</i> is equal to <i>TemplateQualifier</i> and the qualified element inherits from <i>HasKind</i> , the qualified element shall be of kind <i>Template</i> (<i>HasKind/kind</i> = " <i>Template</i> ")

Changes V3.0.1 vs. V3.0

Major Bugfixes:

- CHANGED: DataTypeDefXsd all links now reference correctly to XML Schema 1.0 (xmld-schema-2) not to XML Schema V1.1 (xmld-schema11-2) ([#312](#), [#363](#)), i.e. remove xs:yearMonthDuration + editorial changes (remove redundant entries, sort entries. Additionally, added notes that RDF is using XML Schema 1.1 but a subset.
- CHANGED: support relative path for SubmodelElement File, PathType: support complete URI scheme for files RFC2396 conformant to anyURI of XML Schema 1.0, Part 2 ([#299](#))

- CHANGED: Constraint AASd-116 globalAssetId + added note that globalAssetId should only be used in discovery functionality but not as value for SpecificAssetId/name ([#390](#))
- CHANGED: make EmbeddedDataSpecification/dataSpecification mandatory (as implemented in schemas) ([#296](#))
- CHANGED: Update on handling AASd-130 for schemas different to xml and reformulation of Constraint AASd-130 ([#362](#))
- CHANGED: (Editorial): updated Change Logs of V3.0 w.r.t. Range: Range was set to experimental in V3.0
- CHANGED: (Editorial, the schemas implemented it like this) Annex UML Tables: "0..*" or "0..3" etc. means that the list may be either not available (optional) or the list is not empty. ([#418](#))
- CHANGED: (Editorial, the schemas implemented it like this, table was correct) Update Figure containing Resource: Resource/path has cardinality 1 and Resource/contentType has cardinality 0..1 ([#438](#))

Other Bugfixes:

- (Editorial) Fix Figure Logical Model for Keys of References (add value Referable to AASReferables, remove Referable from AasReferableNonIdentifiables (enumeration table were correct) (used in Constraints only).
- (Editorial) MultiLanguageNameType inconsistent description, maxLength=128 (schemata were correct) ([#313](#))
- (Editorial) HasKind/kind explanatory text: use template, not type ([#313](#))
- (Editorial) Qualifier/Kind changed to Qualifier/kind (typo in table, UML and schema correct)
- (Editorial) BasicEventElement/Direction and BasicEventElement/State changed to BasicEventElement/direction and BasicEventElement/state typo in table, UML and schema correct)
- Fix figure for DataTypeDefXsd: ordering was not correct, xs:float moved to its place
- (Editorial) fix figure "Association" in Annex for UML ([#328](#))
- (Editorial) change recommendation to use a global reference to use an external reference, same for externalSubjectId: it is an external reference.
- (Editorial) JSON and XML Schema references to GitHub admin-shell-io reformulated
- (Editorial) correct Figure 23 Metamodel of an AssetAdministrationShell: arrow removed from association between Submodel and AssetAdministrationShell
- (Editorial) update deprecated web links
- (Editorial) correct information in Changes V3.0 vs. V3.0RC02 w.r.t. VersionType and RevisionType
- Update links and names of documents in Bibliography

Metamodel Changes V3.0.1 vs. V3.0

Template 36. Changes in Metamodel

Nc	V3.1 Change w.r.t. V3.0	Comment
(x)	BasicEventElement/Direction	(bugfix in Text only) attribute starts with small letter
(x)	BasicEventElement/State	(bugfix in Text only) attribute starts with small letter
x	DataTypeDefXsd	BUGFIX: Remove xs:yearMonthDuration from enumeration Updated links to XML Schema 1.0 (not 1.1)
(x)	EmbeddedDataSpecification/dataSpecification	(bugfix in Text only) now mandatory
	File/value	Type was extended, see PathType

Nc	V3.1 Change w.r.t. V3.0	Comment
(x)	MultiLanguageNameType	(bugfix in Text only) maxLength=128 (as derived and implemented)
	PathType	string instead of Identifier but with same length constraints extend data type to support complete URI scheme for files RFC2396
(x)	Qualifier/Kind	(bugfix in Text only) attribute starts with small letter
	Resource/path	Type was extended, see PathType

Template 37. New, Changed or Removed Constraints

Nc	V3.0 vs. V2.0.1	New, Update, Removed, Reformulated	Comment
x	AASd-116	Update	Constraint AASd-116: "globalAssetId" (case-insensitive) is a reserved key. If used as value for SpecificAssetId/name, SpecificAssetId/value shall be identical to AssetInformation/globalAssetId. to Constraint AASd-116: "globalAssetId" (case-insensitive) is a reserved key for SpecificAssetId/name with the semantics as defined in https://admin-shell.io/aas/3/0/AssetInformation/globalAssetId.
	AASd-130	Reformulated	Constraint AASd-130: an attribute with data type "string" shall consist of these characters only: <code>^[x09\x0A\x0D\x20-\uD7FF\uE000-\uFFFF\u00010000-\u0010FFFF]*\$</code>. to Constraint AASd-130: An attribute with data type "string" shall be restricted to the characters as defined in XML Schema 1.0, i.e. the string shall consist of these characters only: <code>^[x09\x0A\x0D\x20-\uD7FF\uE000-\uFFFF\u00010000-\u0010FFFF]*\$</code>.

Changes V3.0 vs. V2.0.1

Major Changes:

- Document split into several documents: Part 1 on metamodel of the AAS (this document), Part 5 on the aasx package exchange format, Part 3 series on the predefined data specifications, and Part 4 (security)
- CHANGED: Split of SubmodelElementCollection into SubmodelElementList (with orderRelevant) and SubmodelElementCollection
- CHANGED: Reference type and referredSemanticId added to Reference; Local and Parent attributes removed from Reference. Logical enumeration concept updated. Some renaming and some new enumerations. Constraint added for references. Grammar for text serialization updated.
- CHANGED: idType from Identifier removed, ID now string
- CHANGED: idShort of Referable now optional + Constraints added with respect to ID and idShort, includes that idShort of Submodels etc. no longer need to be unique in the context of an AssetAdministrationShell

- CHANGED: semanticId no longer mandatory but recommended for SubmodelElement. semanticId now recommended not only for submodel instance but also for submodel template
- NEW: supplemental Semantic IDs
- CHANGED: SubmodelElements do no longer inherit from HasKind, only Submodel has distinction between submodel template or submodel instance (including update of tAAS-#18 and -#19)
- CHANGED: Revised concept on handling of Asset and assetIdentificationModel (assetInformation), Asset removed, no Asset/billOfMaterial any longer. Specific asset IDs added.
- CHANGED: Attributes with type "string" were substituted by string types with length restrictions + some more constraints on string handling. LangStringSet handling updated.
- REMOVED: ConceptDictionaries removed, no longer supported
- REMOVED: Views removed, no longer supported
- NEW: Events now experimental parts of normative part (including renaming and smaller changes)
- NEW: Besides type assets and instance assets, assets for which this kind of classification is not applicable are also supported (conformant to IEC 63278-1)
- REMOVED: Security attribute removed from Asset Administration Shell, Access Control remains part of the specification
- ENHANCED: DataTypeIEC61360 extended with values for IRI, IRDI, BLOB, FILE + corresponding new constraints added
- CHANGED: Handling of attributes with xsd-related types like DataTypeDef. New types introduced.
- NEW: hasExtensions introduced
- CHANGED: In some mappings or serializations, the type "Reference" is converted into a single string. In this case, it is now required (and not only recommended) to use the defined string serialization.
- CHANGED: Extracted and not part of this specification any longer; mapping rules for different serializations + Schemata + Example in different serializations
- CHANGED: Referable/category set to <<Deprecated>>
- CHANGED: Range set to <<Experimental>>
- NEW: Besides <<Deprecated>>, new stereotype <<Experimental>> introduced
- NEW: Qualifier/kind introduced (ValueQualifier, TemplateQualifier, ConceptQualifier)
- CHANGED: Terms and Definitions updated to be conformant to IEC 63278-1 DRAFT, July 2022 (note: this document contains more terms and definitions than IEC 63278-1 and vice versa: not all terms and definitions from IEC 63278-1 are included). Definition of view removed. Definition of service added from Part 2.
- CHANGED: Description of ModellingKind
- Parent attribute in Referables removed
- NEW: Two new terms introduced: coded value and explicit value
- CHANGED: Updated grammar on how to define semantic identifiers for metamodel elements of this specification
- CHANGED: Blob type changed from byte[0..*] to base64Binary
- NEW: Appendix for Backus-Naur form (BNF) + update of all grammars using BNF and variants so that they are using consistent grammar language
- NEW: Clause on embedded data specifications
- EDITORIAL: Text updated, no kind column any longer in class tables, instead notation of ModelReference<{Referable}>. New table for Primitives/Data Types
- EDITORIAL: New clause "Introduction"
- EDITORIAL: New clause "Matching strategies for semantic identifiers"
- EDITORIAL (REMOVED): Clause on Tooling and Open Source removed

- EDITORIAL: Vector graphics
- NEW: Constraints implicitly contained in text were formalized and numbered (normative)
- NEW: Environment explicitly part of UML (was part of serializations from the beginning)

Bugfixes:

- Corrected Japanese example for xd:string
- HasDataSpecification/embeddedDataSpecs 0..* not 0..1
- Qualifier is and never was abstract (Constraint was), table was correct, UML corrected
- Correct AASd-051: VIEW no longer supported
- Type of SubmodelElementList/typeValueListElement corrected to AasSubmodelElements (before SubmodelElementElements)
- Missing table for enumeration ReferenceTypes added
- Bugfix table specifications w.r.t. kind of attribute (from aggr to attr – column kind was removed, see above)

Smaller changes:

- EDITORIAL: Qualifier description updated
- EDITORIAL: Reformulation of constraints dealing with References and Key/type
- EDITORIAL: Examples now with https: and not http:
- EDITORIAL: Footnotes reused
- EDITORIAL: Added explanation for annotated relationship elements
- EDITORIAL: Asset type and asset instance now type asset and instance asset (conformant to IEC 63278-1)
- EDITORIAL: example for langString serialization changed (table 6)

Metamodel Changes V3.0 vs. V2.0.1

Template 38. Changes

Nc	V3.0 Change w.r.t. V2.0.1	Comment
	anySimpleTypeDef	Type removed, was no longer used in any class definition, was mentioned in text only.
x	Asset	Removed, asset referenced via AssetInformation/globalAssetId only
x	AssetAdministrationShell/asset	Removed, substituted by AssetAdministrationShell/assetInformation (but no reference any longer, instead now aggregation)
x	AssetAdministrationShell/conceptDictionaries	Removed
x	AssetAdministrationShell/security	Removed Note: Security is still part of the Asset Administration Shell, but the Asset Administration Shell and its elements are referenced from Security.

Nc	V3.0 Change w.r.t. V2.0.1	Comment
x	AssetAdministrationShell/view	Removed, Views no longer supported
	AssetKind/Instance	Updated description of value "Instance" of enumeration "AssetKind" conformant to IEC 63278-1
	AssetKind/Type	Updated description of value "Type" of enumeration "AssetKind" conformant to IEC 63278-1
x	BasicEvent	Renamed to BasicEventElement and set to <<Experimental>>
x[2]	BlobType	Primitive changed from "group of bytes" to Base64Binary
x	ConceptDictionary	Removed
x	Constraint	Abstract class removed. Formula now used in Security part only
x	DataSpecification	No longer inherits from Identifiable. However, same attribute names and types
x	DataSpecification/description	Type changed from LangStringSet to MultiLanguageTextType, thus adding a length constraint
	DataSpecificationContent	Stereotype <<Template>> added
(x)	DataTypeDef	Removed and split into DataTypeDefXsd and DataTypeDefRdf. Some types excluded and not supported because now XML Schema 1.0 reference + Before: just string allowing any xsd simple type as string + + added prefix xs: or rdf:, resp., to every value in enumeration
x	Entity/asset	Removed, substituted by Entity/globalAssetId and Entity/specificAssetId
x	Event	Renamed to EventElement
x	File/mimeType	Renamed to contentType + Type changed from MimeType to ContentType
x	Formula	Now abstract class Formula now used in Security part only
x	HasKind/kind	Type changed from ModelingKind to ModellingKind
x	Identifiable/identification	Removed + Substituted by Identifiable/id
x	IdentifiableElements	Renamed to AasIdentifiables

Nc	V3.0 Change w.r.t. V2.0.1	Comment
x	Identifier	Type changed Before struct class with two attributes: id and idType. Now string data type only. Maximum length defined: 2,000 characters
	IdentifierType	Enumeration removed because no idType any longer
x	Key/idType	removed
x	Key/local	Local attribute removed.
x	Key/value	Type changed from string to Identifier, thus adding a length constraint
(x)	KeyElements	Renamed to KeyTypes The elements remain, except for new SubmodelElementList, and renamed submodel elements Event and BasicEvent to EventElement and BasicEventElement
	KeyType	Enumeration removed because no Key/idType any longer
	LocalKeyType	Enumeration removed because no Key/idType any longer
x	MimeType	Type name changed to ContentType
x	MultiLanguageProperty/value	Type changed from LangStringSet to MultiLanguageTextType, thus adding a length constraint
x	PathType	Same as Identifier, i.e. length constraint added
	Property/valueType	Type changed from DataTypeDef to DataTypeDefXsd
x	Qualifiable/qualifier	Type changed from Constraint to Qualifier
	Qualifier	No longer inherits from abstract class "Constraint"
	Qualifier/valueType	Type changed from DataTypeDef to DataTypeDefXsd
x	QualifierType	Type changed from string to NameType (i.e. length constraint added)
	Range	set to <<Experimental>>
	Range/valueType	Type changed from DataTypeDef to DataTypeDefXsd
x	Referable/category	Type changed from string to NameType (i.e. length constraint added) Set to deprecated

Nc	V3.0 Change w.r.t. V2.0.1	Comment
x	Referable/description	Type changed from string to MultiLanguageTextType, thus adding length constraint
	Referable/idShort	Now optional, was mandatory Type changed from string to NameType (i.e. length constraint added)
x	Referable/parent	Parent attribute removed.
x	ReferableElement/BasicEvent	Renamed to BasicEventElement Now part of AasSubmodelElements
x	ReferableElements	Substituted with enumeration AasSubmodelElements and AasIdentifiables
x	ReferableElements/AccessPermissionRule	Removed from Enumeration, AccessPermissionRule is not referable any longer Not part of new AasReferableNonIdentifiables
x	ReferableElements/Event	Renamed to EventElement Now part of AasSubmodelElements
x	ReferenceTypes/GlobalReference	Renamed to ExternalReference
	RelationshipElement/first	Type changes from model reference Referable to Reference (global or model reference)
	RelationshipElement/second	Type changes from model reference Referable to Reference (global or model reference)
x ^[1]	SubmodelElement/kind	Removed. SubmodelElement no longer inherits from HasKind
	ValueDataType	Before as specified via DataTypeDef, now any xsd atomic type as specified via DataTypeDefXsd
x	View	Removed

Template 39. New Elements in Metamodel

Nc	New Elements V3.0 vs V2.0.1	Comment
	AasIdentifiables	New enumeration used for References, includes abstract Identifiable + Before: Identifiables
	AasReferableNonIdentifiables	New enumeration used for References
	AasReferables	New enumeration used for References, includes abstract Referable

Nc	New Elements V3.0 vs V2.0.1	Comment
	AasSubmodelElements	New enumeration used for References + Before: ReferableElements
	AdministrativeInformation/creator	New optional attribute
	AdministrativeInformation/templateId	New optional attribute
x	AssetAdministrationShell/assetInformation	Substitute for AssetAdministrationShell/asset; no reference any longer, instead aggregation
	AssetInformation	with attributes/functionality from former class Asset because not specific to Asset but AAS
	AssetInformation/assetKind	Former Asset/assetKind
	AssetInformation/assetType	New optional attribute
	AssetInformation/globalAssetId	Former Asset/identification/id
	AssetInformation/specificAssetId	Former Asset/assetIdentificationModel
	AssetInformation/thumbnail	Optional Attribute of new class AssetInformation that was not available in Asset class before
	AssetKind/NotApplicable	New enumeration value
	BasicEventElement	Former BasicEvent + New <<Experimental>> submodel element for events
	BasicEventElement/direction	Was part of non-normative part before
	BasicEventElement/lastUpdate	Was part of non-normative part before
	BasicEventElement/maxInterval	Was part of non-normative part before Type changed from dateTime to duration
	BasicEventElement/messageBroker	Was part of non-normative part before
	BasicEventElement/messageTopic	Was part of non-normative part before
	BasicEventElement/minInterval	Was part of non-normative part before Type changed from dateTime to duration
	BasicEventElement/observed	Former name: BasicEvent/observed
	BasicEventElement/state	Was part of non-normative part before
	ContentType	Former name: MimeType Maximum length defined: 100 characters
	DataTypeDefRdf	Enumeration for types of Rdf + added prefix rdf: to every value in enumeration

Nc	New Elements V3.0 vs V2.0.1	Comment
	DataTypeDefXsd	Enumeration that corresponds to anySimpleTypes of XML Schema 1.0 + + added prefix xs: to every value in enumeration
	dateTimeStamp	New data type for metamodel as used in EventPayload
	DataSpecification/administration	Was inherited before by Identifiable
	DataSpecification/id	Was inherited before by Identifiable
	DataSpecification/description	Was inherited before by Identifiable
	Direction	New Enumeration for BasicEventElement
	Entity/globalAssetId	Former Entity/asset was split into globalAssetId and specificAssetId
	Entity/specificAssetId	Former Entity/asset was split into globalAssetId and specificAssetId
	Environment	New class for entry point for Asset Administration Shells, submodels and concept descriptions.
	EventElement	Former name: Event Set to <<Experimental>>
	EventPayload	New experimental class for event payload Was part of non-normative part before
	EventPayload/observableSemanticId	Was part of non-normative part before
	EventPayload/payload	Was part of non-normative part before Type changed from string to BlobType
	EventPayload/source	Was part of non-normative part before Type changed from ModelReference(Referable) to ModelReference(EventElement)
	EventPayload/sourceSemanticId	Was part of non-normative part before
	EventPayload/subjectId	Was part of non-normative part before
	EventPayload/timestamp	Was part of non-normative part before Type changed from dateTimeStamp to dateTime because restriction to types of XML Schema 1.0 that does not contain dateTimeStamp. dateTimeStamp is a derived type of dateTime in XML Schema 1.1
	EventPayload/topic	Was part of non-normative part before Type changed from string to MessageTopicType (i.e. length constraint added, maximum 255 characters)
	Extension	New class, part of new abstract class HasExtensions

Nc	New Elements V3.0 vs V2.0.1	Comment
	Extension/name	
	Extension/refersTo	
	Extension/valueType	
	Extension/valueType	
	File/contentType	Former File/mimeType
	FragmentKeys	New enumeration used for References
	GenericFragmentKeys	New enumeration used for References
	GenericGloballyIdentifiers	New enumeration used for References
	GloballyIdentifiables	New enumeration used for References
	HasExtensions	New abstract class, inherited by Referable
	HasSemantics/supplementalSemanticId	New attribute
	Identifiable/id	Substitute for Identifiable/identification
	KeyTypes	Before: KeyElements + New submodel element SubmodelElementList added, renamed submodel elements Event and BasicEvent to EventElement and BasicEventElement
	LabelType	New string type with maximum 64 characters
	MessageTopicType	New string type with maximum 255 characters
	ModellingKind	Renamed enumeration, before: ModelingKind
	MultiLanguageNameType	Substitute for LangStringSet with short multi-language strings, maximum 64 characters
	MultiLanguageTextType	Substitute for LangStringSet with long multi-language strings, maximum 64 characters
	NameType	New string type with maximum 128 characters
	Qualifier/kind	New experimental attribute for Qualifier
	QualifierKind	New enumeration for Qualifier/kind
	Referable/displayName	New optional attribute for all referables
	Reference/referredSemanticId	New optional attribute for Reference
	Reference/type	New mandatory attribute for Reference

Nc	New Elements V3.0 vs V2.0.1	Comment
	ReferenceTypes	New enumeration for Reference/type
	ReferenceTypes/ExternalReference	Enumeration value, was named GlobalReference before
	Resource	new type for AssetInformation/defaultThumbnail
	ShortNameType	New string type with maximum 64 characters
	SpecificAssetId	New type for AssetInformation/specificAssetId
	SpecificAssetId/externalSubjectId	See Attribute Based Access Control (ABAC) for subject concept
	SpecificAssetId/name	New type for AssetInformation/specificAssetId
	SpecificAssetId/value	New type for AssetInformation/specificAssetId
	StateOfEvent	New experimental enumeration for BasicEventElement
	SubmodelElementElements	Enumeration for submodel elements (split of ReferableElements)
	SubmodelElementList	Before SubmodelElementCollection was used for lists and collections
	SubmodelElementList/orderRelevant	Similar to SubmodelElementCollection/ordered
	SubmodelElementList/semanticIdListElement	Attribute of new class SubmodelElementList
	SubmodelElementList/typeValueListElement	Attribute of new class SubmodelElementList
	SubmodelElementList/value	Similar to SubmodelElementCollection/value but ordered and with all elements having the same semanticId
	SubmodelElementList/valueTypeListElement	Attribute of new class SubmodelElementList

Template 40. New, Changed or Removed Constraints

Nc	V3.0 vs. V2.0.1	New, Update, Removed, Reformulated	Comment
	AASd-001	Removed	Constraint AASd-001: In case a referable element is not an identifiable element, this ID is mandatory and used for referring to the element in its name space. For namespace part see AASd-022
	AASd-002	Update	Regular expression added Constraint AASd-002: idShort of Referables shall only feature letters, digits, underscore (""); <i>starting mandatory with a letter, i.e. [a-zA-Z][a-zA-Z0-9]*</i> .

Nc	V3.0 vs. V2.0.1	New, Update, Removed, Reformulated	Comment
	AASd-003	Removed	See AASd-022 Constraint AASd-003: idShort of Referables within the same name space shall be unique (case-sensitive).
	AASd-006	Reformulated	Constraint AASd-006: If both, the value and the valueId of a Qualifier are present, the value needs to be identical to the value of the referenced coded value in Qualifier/valueId.
	AASd-005	Reformulated	Constraint AASd-005: If AdministrativeInformation/version is not specified, AdministrativeInformation/revision shall also be unspecified. This means that a revision requires a version. If there is no version, there is no revision either. Revision is optional.
	AASd-007	Reformulated	Constraint AASd-007: If both the Property/value and the Property/valueId are present, the value of Property/value needs to be identical to the value of the referenced coded value in Property/valueId.
	AASd-008	Removed	Constraint AASd-008: The submodel element value of an operation variable shall be of kind=Template.
	AASd-010	Renamed	Renamed and reformulated to AASs-010 Not part of this document any longer but of part security
	AASd-011	Renamed	Renamed and reformulated to AASs-011 Not part of this document any longer but of part security
	AASd-012	Reformulated	Constraint AASd-012: If both the MultiLanguageProperty/value and the MultiLanguageProperty/valueId are present, the meaning must be the same for each string in a specific language, as specified in MultiLanguageProperty/valueId
	AASd-014	Reformulated	Entity was changed Constraint AASd-014: Either the attribute globalAssetId or specificAssetId of an Entity must be set if Entity/entityType is set to "SelfManagedEntity". Otherwise, they do not exist.
	AASd-115	Reformulated	Constraint AASd-115: If a first level child element in a SubmodelElementList does not specify a semanticId, the value is assumed to be identical to SubmodelElementList/semanticIdListElement.
	AASd-118	Reformulated	Constraint AASd-118: If a supplemental semantic ID (HasSemantics/supplementalSemanticId) is defined, there shall also be a main semantic ID (HasSemantics/semanticId).
	AASd-119	Reformulated	Constraint AASd-119: If any Qualifier/kind value of a Qualifiable/qualifier is equal to TemplateQualifier and the qualified element inherits from "hasKind", the qualified element shall be of kind Template (HasKind/kind = "Template").

Nc	V3.0 vs. V2.0.1	New, Update, Removed, Reformulated	Comment
(x)	AASd-020	New	Constraint AASd-020: The value of Property/value shall be consistent to the data type as defined in Property/valueType.
(x)	AASd-021	New	Constraint AASd-021: Every qualifiable can only have one qualifier with the same Qualifier/type.
	AASd-022	New	Added case-sensitivity for idShort (since AASd-003 was removed) Constraint AASd-022: idShort of non-identifiable referables within the same name space shall be unique (case-sensitive)
	AASd-129	Reformulated	Constraint AASd-129: If any Qualifier/kind value of a SubmodelElement/qualifier (attribute qualifier inherited via Qualifiable) is equal to TemplateQualifier, the submodel element shall be part of a submodel template, i.e. a Submodel with Submodel/kind (attribute kind inherited via HasKind) value equal to Template.
	AASd-077	New	Constraint AASd-077: The name of an extension (Extension/name) within HasExtensions needs to be unique.
	AASd-090	New	Constraint AASd-090: For data elements, category (inherited by Referable) shall be one of the following values: CONSTANT, PARAMETER or VARIABLE. Default: VARIABLE
	AASd-107	New	Constraint AASd-107: If a first level child element in a SubmodelElementList has a semanticId, it shall be identical to SubmodelElementList/semanticIdListElement.
	AASd-108	New	Constraint AASd-108: All first level child elements in a SubmodelElementList shall have the same submodel element type as specified in SubmodelElementList/typeValueListElement.
	AASd-109	New	Constraint AASd-109: If SubmodelElementList/typeValueListElement is equal to Property or Range, SubmodelElementList/valueTypeListElement shall be set and all first level child elements in the SubmodelElementList shall have the value type as specified in SubmodelElementList/valueTypeListElement.
	AASd-114	New	Constraint AASd-114: If two first level child elements in a SubmodelElementList have a semanticId, they shall be identical.
	AASd-115	New	Constraint AASd-115: If a first level child element in a SubmodelElementList does not specify a semanticId, the value is assumed to be identical to SubmodelElementList/semanticIdListElement.
	AASd-116	New	Constraint AASd-116: "globalAssetId" (case-insensitive) is a reserved key. If used as value for SpecificAssetId/name, IdentifierKeyValuePair/value shall be identical to AssetInformation/globalAssetId.
	AASd-117	New	Constraint AASd-117: idShort of non-identifiable Referables not being a direct child of a SubmodelElementList shall be specified.

Nc	V3.0 vs. V2.0.1	New, Update, Removed, Reformulated	Comment
	AASd-118	New	Because of new attribute supplementalSemanticId for HasSemantics Constraint AASd-118: If a supplemental semantic ID (HasSemantics/supplementalSemanticId) is defined, there shall also be a main semantic ID (HasSemantics/semanticId).
	AASd-119	New	New Qualifier/kind attribute Constraint AASd-119: If any Qualifier/kind value of a Qualifiable/qualifier is equal to TemplateQualifier and the qualified element inherits from "hasKind", the qualified element shall be of kind Template (HasKind/kind = "Template").
	AASd-120	New	Constraint AASd-120: idShort of submodel elements being a direct child of a SubmodelElementList shall not be specified.
	AASd-121	New	Constraint AASd-121: For References, the value of Key/type of the first key of Reference/keys shall be one of GloballyIdentifiables.
	AASd-122	New	Constraint AASd-122: For external references, i.e. References with Reference/type = ExternalReference, the value of Key/type of the first key of Reference/keys shall be one of GenericGloballyIdentifiables.
	AASd-123	New	Constraint AASd-123: For model references, i.e. References with Reference/type = ModelReference, the value of Key/type of the first key of Reference/keys shall be one of AasIdentifiables.
	AASd-124	New	Constraint AASd-124: For external references, i.e. References with Reference/type = ExternalReference, the last key of Reference/keys shall be either one of GenericGloballyIdentifiables or one of GenericFragmentKeys.
	AASd-125	New	Constraint AASd-125: For model references, i.e. References with Reference/type = ModelReference with more than one key in Reference/keys, the value of Key/type of each of the keys following the first key of Reference/keys shall be one of FragmentKeys.
	AASd-126	New	Constraint AASd-126: For model references, i.e. References with Reference/type = ModelReference with more than one key in Reference/keys, the value of Key/type of the last Key in the reference key chain may be one of GenericFragmentKeys, or no key at all shall have a value out of GenericFragmentKeys.
	AASd-127	New	Constraint AASd-127: For model references, i.e. References with Reference/type = ModelReference with more than one key in Reference/keys, a key with Key/type FragmentReference shall be preceded by a key with Key/type File or Blob. All other AAS fragments, i.e. Key/type values out of AasSubmodelElements, do not support fragments.
	AAS-128	New	Constraint AASd-128: For model references, i.e. References with Reference/type = ModelReference, the Key/value of a Key preceded by a Key with Key/type=SubmodelElementList is an integer number denoting the position in the array of the submodel element list.

Nc	V3.0 vs. V2.0.1	New, Update, Removed, Reformulated	Comment
	AASd-129	New	Necessary as supplement for AASd-119 since SubmodelElement does not inherit from HasKind any longer Constraint AASd-129: If any Qualifier/kind value of a SubmodelElement/qualifier (attribute qualifier inherited via Qualifiable) is equal to TemplateQualifier, the submodel element shall be part of a submodel template, i.e. a Submodel with Submodel/kind (attribute kind inherited via HasKind) value equal to Template.
x	AASd-130	New	ensures that encoding is possible and interoperability between different serializations is possible. Constraint AASd-130: An attribute with data type "string" shall consist of these characters only: <code>^[x09\x0A\x0D\x20-\uD7FF\uE000-\uFFFF\u00010000-\u0010FFFF]*\$</code> .
(x)	AASd-131	New	Constraint AASd-131: The globalAssetId or at least one specificAssetId shall be defined for AssetInformation.
(x)	AASd-133	New	Constraint AASd-133: SpecificAssetId/externalSubjectId shall be a global reference, i.e. Reference/type = GlobalReference.
(x)	AASd-134	New	Constraint AASd-134: For an Operation, the idShort of all inputVariable/value, outputVariable/value and inoutVariable/value shall be unique.
x	AASd-135	New	Constraint AASd-135: AdministrativeInformation/version shall have a length of maximum 4 characters.
x	AASd-136	New	Constraint AASd-136: AdministrativeInformation/revision shall have a length of maximum 4 characters.

Changes V3.0 vs. V3.0RC02

Major changes:

- Document split into several documents: Part 1 on metamodel of the AAS (this document), Part 5 on the aas package exchange format, Part 3 series on the predefined data specifications, and Part 4 (security)
- CHANGED: SubmodelElements do not inherit from HasKind any longer, only Submodel has distinction between submodel template or submodel instance (including update of tAAS-#18 and -#19)
- NEW: New Constraint for valid strings (AASd-130)
- NEW: Length constraints added for many string attributes, in most cases by introducing new string types
- CHANGED: renamed ReferenceTypes/GlobalReference to ReferenceTypes/ExternalReference (text serialization of references and constraints updated accordingly)
- CHANGED: Type of globalAsset is now Identifier and not Reference (AssetInformation and Entity)
- CHANGED: Updated text for submodel element collections
- EDITORIAL: Examples for matching references
- CHANGED: Terms and definitions updated to be conformant to IEC 63278-1 DRAFT, July 2022 (note: this document contains more terms and definitions than IEC 63278-1 and vice versa; not all terms and definitions from IEC 63278-1 are included). Definition of view removed. Definition of service added from Part 2.

- CHANGED: Description of ModellingKind
- NEW: Appendix for Backus-Naur form (BNF), including update of all grammars using BNF and variants for consistent grammar language usage
- ENHANCED: Extended grammar (referredSemanticId) for text serialization of <Reference>
- CHANGED: Grammar on how to define semantic identifiers for metamodel elements of this specification: <Character> definition in <Namespace> (before "an unreserved character permitted by DIN SPEC 91406", now regular expression [a..zA..Z-])
- CHANGED: In some mappings or serializations, the type "Reference" is converted into a single string. In this case, it is now required (instead of just recommended) to use the defined string serialization.
- CHANGED: Type of BlobType changed from "group of bytes" to "base64Binary"
- NEW: Two new terms introduced: coded value and explicit value
- REMOVED: Referable/checksum
- CHANGED: EventElements including all classes introduced for Events set to <<Experimental>>
- CHANGED: Referable/category set to <<Deprecated>>
- CHANGED: Range set to <<Experimental>>
- CHANGED: AdministrativeInformation Class, not data type
- NEW: New stereotype <<Experimental>> introduced besides <<Deprecated>>
- CHANGED: Qualifier/kind set to <<Experimental>>
- CHANGED: enumeration DataTypeDefXsd for data types for valueType attribute (e..g. in Property) as well as enumeration DataTypeDefRdf (for consistency) + restriction to XML Schema 1.0 (not 1.1.)
- EDITORIAL (REMOVED): Clause on Tooling and Open Source
- EDITORIAL: vector graphics
- NEW: Besides type assets and instance assets now also assets for which this kind of classification is not applicable are supported (conformant to IEC 63278-1)

Bugfixes: * Corrected Japanese example for xd:string * UML figure for HasExtensions did not show inheritance (table for Extension was correct) * HasDataSpecification/embeddedDataSpecs 0..* not 0..1 * Qualifier is and never was abstract (Constraint was), table was correct, UML corrected * Correct AASd-051: VIEW no longer supported * Type of SubmodelElementList/typeValueListElement corrected to AasSubmodelElements (before SubmodelElementElements) * Correct text serialization of <Reference> * Added missing table for enumeration ReferenceTypes * AASd-117 it is not the SubmodelElementList having no idShort but its childs * KeyTypes Table: set of AasReferables added

Smaller changes:

- EDITORIAL: Qualifier description updated
- EDITORIAL: Reformulation of constraints dealing with References and Key/type
- EDITORIAL: Examples now with https: and not http:
- EDITORIAL: Footnotes reused
- EDITORIAL: Added explanation for annotated relationship elements
- EDITORIAL: asset type and asset instance now type asset and instance asset (conformant to IEC 63278-1)
- EDITORIAL: example for langString serialization changed (table 6)

Metamodel Changes V3.0 vs. V3.0RC02

Template 41. Changes

Nc	V3.0 Change w.r.t. V3.0RC02	Comment
	AdministrativeInformation	Stereotype <<dataType>> removed
	AssetInformation/externalSubjectId	Not mandatory any longer; now optional
x	AssetInformation/globalAssetId	Type changed from Reference to Identifier
	AssetKind/Type	Updated description of value "Type" of enumeration "AssetKind" conformant to IEC 63278-1
	AssetKind/Instance	Updated description of value "Instance" of enumeration "AssetKind" - conformant to IEC 63278-1
	BasicEventElement	Set to <<Experimental>>
x	BasicEventElement/messageTopic	Type changed from string to MessageTopicType (i.e. length constraint added, maximum 255 characters)
x	BasicEventElement/minInterval	Type changed from dateTime to duration
x	BasicEventElement/maxInterval	Type changed from dateTime to duration
(x) [1]	BlobType	Primitive changed from "group of bytes" to Base64Binary
	ContentType	Maximum length defined: 100 characters
	decimalBuildInTypes	Removed
	durationBuildInTypes	Removed
x	DataSpecification/description	Type changed from LangStringSet to MultiLanguageTextType; length constraint added
x	DataTypeDefRdf/langString	Added prefix "rdf:", i.e. change from langString to rdf:langString
x	DataTypeDefXsd/dateTimeStamp	Removed since not part of XML Schema 1.0
x	DataTypeDefXsd/dayTimeDuration	Removed since not part of XML Schema 1.0
x	DataTypeDefXsd/yearMonthDuration	Removed since not part of XML Schema 1.0
	Direction	Set to <<Experimental>>
x	Entity/globalAssetId	Type changed from Reference to Identifier
x	Extension/name	Type changed from string to NameType; length constraint added
	EventElement	Set to <<Experimental>>
	EventElement/duration	Type changed from dateTimeStamp to dateTime
	EventPayload	Set to <<Experimental>>

Nc	V3.0 Change w.r.t. V3.0RC02	Comment
	EventPayload/payload	Type changed from string to BlobType
	EventPayload/source	Type changed from ModelReference(Referable) to ModelReference(EventElement)
	EventPayload/timestamp	Type changed from dateTimeStamp to dateTime because restriction to types of XML Schema 1.0 that does not contain dateTimeStamp. dateTimeStamp is a derived type of dateTime in XML Schema 1.1
	EventPayload/topic	Type changed from string to MessageTopicType (i.e. length constraint added, maximum 255 characters)
x	HasKind/kind	Type changed from ModelingKind to ModellingKind
x	Identifier	Maximum length defined: 2,000 characters
x	Key/value	Type changed from string to Identifier; length constraint added
x	MultiLanguageProperty/value	Type changed from LangStringSet to MultiLanguageTextType; length constraint added
x	PathType	Same as Identifier; length constraint added
	PrimitiveTypes	Removed
	Qualifier/kind	Set to <<Experimental>>
x	QualifierType	Type changed from string to NameType; length constraint added
	rdfBuildInTypes	Removed
	Range	Set to <<Experimental>>
x	Referable/category	Type changed from string to NameType; length constraint added Category set to deprecated
x	Referable/checksum	Removed
x	Referable/displayName	Type changed from string to MultiLanguageNameType; length constraint added Text how to select a suitable display name removed; now explained in Table 2
x	Referable/description	Type changed from string to MultiLanguageTextType; length constraint added
x	Referable/idShort	Type changed from string to NameType; length constraint added
x	ReferenceTypes/GlobalReference	Renamed to ExternalReference
	Resource	Stereotype <<DataType>> removed.
	StateOfEvent	Set to <<Experimental>>

Nc	V3.0 Change w.r.t. V3.0RC02	Comment
x	SpecificAssetId/name	Type changed from string to LabelType (a string with length constraint)
x	SpecificAssetId/value	Type changed from string to Identifier (because of length constraint)
x [2]	SubmodelElement/kind	Removed. SubmodelElement does not inherit from HasKind any longer

Template 42. New Elements in Metamodel

Nc	V3.0 vs. V3.0RC02 New Elements	Comment
	AdministrativeInformation/creator	New optional attribute
	AdministrativeInformation/templateId	New optional attribute
	AssetInformation/assetType	New optional attribute
	AssetKind/NotApplicable	New enumeration value
	LabelType	New string type with maximum 64 characters
	MessageTopicType	New string type with maximum 255 characters
	ModellingKind	Renamed enumeration, before: ModelingKind
	MultiLanguageNameType	Substitute for LangStringSet with short multi-language strings, maximum 64 characters
	MultiLanguageTextType	Substitute for LangStringSet with long multi-language strings, maximum 64 characters
	NameType	New string type with maximum 128 characters
	ReferenceTypes/ExternalReference	Enumeration value: before: GlobalReference
	RevisionType	New type for <i>AdministrativeInformation/revision</i> with length constraints and regular expression
	ShortNameType	New string type with maximum 64 characters
	VersionType	New type for <i>AdministrativeInformation/version</i> with length constraints and regular expression

Template 43. New, Changed or Removed Constraints

Nc	V3.0 vs. V3.0RC02	New, Update, Removed, Reformulated	Comment
		EDITORIAL	The following constraints were also updated with minor editorial changes: Constraints AASd-121, AASd-122, AASd-123, AASd-124, AASd-125, AASd-126, AASd-127, AASd-129

Nc	V3.0 vs. V3.0RC02	New, Update, Removed, Reformulated	Comment
	AASd-002	Reformulated	Now min length 1, before 2 Constraint AASd-002: idShort of Referables shall only feature letters, digits, underscore (""); <i>starting mandatory with a letter, i.e. [a-zA-Z][a-zA-Z0-9]*</i> .
	AASd-003	Removed	See AASd-022 Constraint AASd-003: idShort of Referables within the same name space shall be unique (case-sensitive).
	AASd-005	Reformulated	Constraint AASd-005: If AdministrativeInformation/version is not specified, AdministrativeInformation/revision shall also be unspecified. This means that a revision requires a version. If there is no version, there is no revision. Revision is optional.
	AASd-006	Reformulated	Constraint AASd-006: If both, the value and the valueId of a Qualifier are present, the value needs to be identical to the value of the referenced coded value in Qualifier/valueId.
	AASd-007	Reformulated	Constraint AASd-007: If both the Property/value and the Property/valueId are present, the value of Property/value needs to be identical to the value of the referenced coded value in Property/valueId.
	AASd-012	Reformulated	Constraint AASd-012: if both the MultiLanguageProperty/value and the MultiLanguageProperty/valueId are present, the meaning must be the same for each string in a specific language, as specified in MultiLanguageProperty/valueId.
	AASd-020	Reformulated	Constraint AASd-020: The value of Qualifier/value shall be consistent with the data type as defined in Qualifier/valueType.
	AASd-022	Update	Added case-sensitivity for idShort (since AASd-003 was removed) Constraint AASd-022: idShort of non-identifiable Referables within the same name space shall be unique (case-sensitive)
	AASd-027	Removed	Not needed any longer since Type of idShort was changed to NameType and NameType has a maximum length of 128 characters Constraint AASd-027: idShort of Referables shall have a maximum length of 128 characters
	AASd-077	Reformulated	Constraint AASd-077: the name of an extension (Extension/name) within HasExtensions needs to be unique
	AASd-100	Removed	Since new string types with length constraints were added, this constraint is no longer needed Constraint AASd-100: An attribute with data type "string" is not allowed to be empty

Nc	V3.0 vs. V3.0RC02	New, Update, Removed, Reformulated	Comment
	AASd-109	Reformulated	Constraint AASd-109: If SubmodelElementList/typeValueListElement is equal to Property or Range, SubmodelElementList/valueTypeListElement shall be set and all first level child elements in the SubmodelElementList shall have the value type as specified in SubmodelElementList/valueTypeListElement.
	AASd-115	Reformulated	Constraint AASd-115: If a first level child element in a SubmodelElementList does not specify a semanticId, the value is assumed to be identical to SubmodelElementList/semanticIdListElement.
	AASd-117	Bugfix	Constraint AASd-117: idShort of non-identifiable Referables not being a direct child of a SubmodelElementList shall be specified.
	AASd-118	Reformulated	Constraint AASd-118: If a supplemental semantic ID (HasSemantics/supplementalSemanticId) is defined, there shall also be a main semantic ID (HasSemantics/semanticId).
	AASd-119	Reformulated	Constraint AASd-119: If any Qualifier/kind value of a Qualifiable/qualifier is equal to TemplateQualifier and the qualified element inherits from "hasKind", the qualified element shall be of kind Template (HasKind/kind = "Template").
	AASd-120	Reformulated	Constraint AASd-120: idShort of submodel elements being a direct child of a SubmodelElementList shall not be specified.
	AASd-121	Reformulated	Constraint AASd-121: For References the value of Key/type of the first key of Reference/keys shall be one of GloballyIdentifiables.
	AASd-122	Reformulated	Constraint AASd-122: For external references, i.e. References with Reference/type = ExternalReference, the value of Key/type of the first key of Reference/keys shall be one of GenericGloballyIdentifiables.
	AASd-123	Reformulated	Constraint AASd-123: For model references, i.e. References with Reference/type = ModelReference, the value of Key/type of the first key of Reference/keys shall be one of AasIdentifiables.
	AASd-124	Reformulated	Constraint AASd-124: For external references, i.e. References with Reference/type = ExternalReference, the last key of Reference/keys shall be either one of GenericGloballyIdentifiables or one of GenericFragmentKeys.
	AASd-125	Reformulated	Constraint AASd-125: For model references, i.e. References with Reference/type = ModelReference with more than one key in Reference/keys, the value of Key/type of each of the keys following the first key of Reference/keys shall be one of FragmentKeys.
	AASd-126	Reformulated	Constraint AASd-126: For model references, i.e. References with Reference/type = ModelReference with more than one key in Reference/keys, the value of Key/type of the last Key in the reference key chain may be one of GenericFragmentKeys, or no key at all shall have a value out of GenericFragmentKeys.

Nc	V3.0 vs. V3.0RC02	New, Update, Removed, Reformulated	Comment
	AASd-127	Reformulated	Constraint AASd-127: For model references, i.e. References with Reference/type = ModelReference with more than one key in Reference/keys, a key with Key/type FragmentReference shall be preceded by a key with Key/type File or Blob. All other AAS fragments, i.e. Key/type values out of AasSubmodelElements, do not support fragments.
	AASd-129	New	Necessary as supplement for AASd-119, since SubmodelElement does not inherit from HasKind any longer Constraint AASd-129: If any Qualifier/kind value of a SubmodelElement/qualifier (attribute qualifier inherited via Qualifiable) is equal to TemplateQualifier, the submodel element shall be part of a submodel template, i.e. a Submodel with Submodel/kind (attribute kind inherited via HasKind) value to Template.
x	AASd-130	New	Ensures that encoding is possible and interoperability between different serializations is possible. Constraint AASd-130: An attribute with data type "string" shall consist of these characters only: <code>^[x09\x0A\x0D\x20-\uD7FF\uE000-\uFFFF\u00010000-\u0010FFFF]*\$</code> .
(x)	AASd-131	New	Constraint AASd-131: The globalAssetId or at least one specificAssetId shall be defined for AssetInformation.
(x)	AASd-133	New	Constraint AASd-133: specificAssetId/externalSubjectId shall be a global reference, i.e. Reference/type = ExternalReference.
(x)	AASd-134	New	Constraint AASd-134: For an operation, the idShort of all inputVariable/value, outputVariable/value, and inoutVariable/value shall be unique.
	AASd-051	Removed	Since category is deprecated, this constraint was removed. Views are no longer supported by metamodel Constraint AASd-051: A <i>ConceptDescription</i> shall have one of the following categories: VALUE, PROPERTY, REFERENCE, DOCUMENT, CAPABILITY, RELATIONSHIP, COLLECTION, FUNCTION, EVENT, ENTITY, APPLICATION_CLASS, QUALIFIER. Default: PROPERTY.

Changes V3.0RC02 vs. V2.0.1

Metamodel Changes V3.0RC02 vs. V2.0.1 w/o Security Part

Note: if you already implemented the changes made in V3.0RC01, please refer to the corresponding clause in the annex. This annex is for readers familiar with V2.0.x only.

Major changes:

- CHANGED: Split of SubmodelElementCollection into SubmodelElementList (with orderRelevant) and SubmodelElementCollection

- CHANGED: Reference type and referredSemanticId added to Reference; Local and Parent attributes removed from Reference; logical enumeration concept updated. Some renaming and some new enumerations. Constraint for References.
- CHANGED: Reference/type now as optional part of string serialization of reference
- CHANGED: idType from identifier removed, ID now string
- CHANGED: idShort of Referable now optional + Constraints added with respect to ID and idShort, includes that idShort of Submodels etc. no longer need to be unique in the context of an Asset Administration Shell
- CHANGED: semanticId no longer mandatory for SubmodelElement
- CHANGED: Revised concept on handling of Asset and assetIdentificationModel (assetInformation), Asset removed, no more Asset/billOfMaterial. any longer. Specific asset IDs added.
- REMOVED: ConceptDictionaries removed, because no longer supported
- REMOVED: Views removed, because no longer supported
- NEW: Event and BasicEvent updated and renamed to EventElement and BasicEventElement
- NEW: Checksum introduced for Referables
- REMOVED: security attribute removed from Asset Administration Shell; access control remains part of the specification
- ENHANCED: DataTypeIEC61360 extended with values for IRI, IRDI, BLOB, FILE + corresponding new constraints added
- ENHANCED: Removed and split into DataTypeDefXsd and DataTypeDefRdf. Some types are excluded and not supported
- CHANGED: Mapping rules for different serializations + schemata + example in different serializations extracted and no longer part of this specification
- EDITORIAL: Text updated, no kind column any longer in class tables, instead notation of ModelReference<{Referable}>. New table for Primitives/Data Types
- EDITORIAL: New clause "Introduction"
- EDITORIAL: New clause "Matching strategies for semantic identifiers"
- NEW: Constraints implicitly contained in text were formalized and numbered (normative)
- NEW: Environment explicitly part of UML (was part of serializations from the beginning)
- NEW: supplemental Semantic IDs
- NEW: Qualifier/kind (TemplateQualifier, ConceptQualifier, ValueQualifier)

Bugfixes:

- bugfix annotation AnnotatedRelationship is of type aggr and not ref* (diagram was correct)
- bugfix specification of ValueList and ValueReferencePairType, no data types, normal classes
- bugfix table specifications w.r.t. kind of attribute (from aggr to attr – column kind was removed, see above)
- bugfix data type specification LangStringSet (no diagram and table any longer)
- bugfix enumeration ReferableElements, no ConceptDictionary any longer + new elements like new submodel elements SubmodelElementList added.

Note: ReferableElements was substituted by AasSubmodelElements and Aas Identifiables.

- Entity/globalAssetId diagram (table was correct): Type change from reference of Reference* to Reference

Template 44. Changes w/o Security

Nc	V3.0RC02 Change w.r.t. V2.0.1	Comment
	AdministrativeInformation	Bugfix: Stereotype "DataType" added
	AnnotatedRelationship/annotation	Bugfix: Type changed from ModelReference< DataElement > to DataElement
	anySimpleTypeDef	Type removed, was no longer used in any class definition, was mentioned in text only
x	Asset	Removed, asset referenced via AssetInformation/globalAssetId only
x	AssetAdministrationShell/asset	Removed, substituted by AssetAdministrationShell/assetInformation (no reference any longer, instead now aggregation)
x	AssetAdministrationShell/conceptDictionaries	Removed
x	AssetAdministrationShell/security	Removed Note: Security is still part of the Asset Administration Shell, but the Asset Administration Shell and its elements are referenced from Security.
	AssetAdministrationShell/view	Removed, views no longer supported
x	BasicEvent	Renamed to BasicEventElement
x	ConceptDictionary	Removed
x	Constraint	Abstract class removed. Formula now used in Security part only
(x)	DataTypeDef	Removed and split into DataTypeDefXsd and DataTypeDefRdf; some types excluded and not supported (see notes in corresponding clause) Before: just string allowing any xsd simple type as string + added prefix xs: or rdf:, resp. to every value in enumeration
x	Entity/asset	Removed, substituted by Entity/globalAssetId and Entity/specificAssetId
x	Event	Renamed to EventElement
x	Extension/refersTo	Type changed from Reference to ModelReference
x	Extension/valueType	Type changed from DataTypeDef to DataTypeDefXsd
x	File/mimeType	Renamed to contentType + Type changed from MimeType to ContentType

Nc	V3.0RC02 Change w.r.t. V2.0.1	Comment
x	Formula	Now abstract class Formula now used in Security part only
x	Formula/dependsOn	Removed, since formula language not yet defined
x	Identifiable/identification	Removed Substituted by Identifiable/id
x	IdentifiableElements	Renamed to AasIdentifiables
x	Identifier	Type changed Before struct class with two attributes: id and idType; now string data type only
	IdentifierType	Enumeration removed, because no idType any longer
x	Key/idType	removed
x	Key/local	Local attribute removed
(x)	KeyElements	Renamed to KeyTypes Note: the elements remain, except for new SubmodelElementList and renamed submodel elements Event and BasicEvent to EventElement and BasicEventElement
	KeyType	Enumeration removed because no Key/idType any longer
	LocalKeyType	Enumeration removed because no Key/idType any longer
x	MimeType	Type name changed to ContentType
	Property/valueType	Type changed from DataTypeDef to DataTypeDefXsd
x	Qualifiable/qualifier	Type changed from Constraint to Qualifier
	Qualifier	No longer inherits from abstract class "Constraint"
	Qualifier/valueType	Type changed from DataTypeDef to DataTypeDefXsd
	Range/valueType	Type changed from DataTypeDef to DataTypeDefXsd
	Referable/idShort	Now optional, was mandatory
x	Referable/parent	Parent attribute removed
x	ReferableElements	Substituted with enumeration AasSubmodelElements and AasIdentifiables

Nc	V3.0RC02 Change w.r.t. V2.0.1	Comment
x	ReferableElements/AccessPermissionRule	Removed from enumeration, AccessPermissionRule is no longer referable Not part of new AasReferableNonIdentifiables
x	ReferableElement/BasicEvent	Renamed to BasicEventElement Now part of AasSubmodelElements
(x)	ReferablesElements/ConceptDictionary	Bugfix: ConceptDictionary removed from enumeration, since ConceptDictionary no longer part of specification Not part of new KeyTypes
x	ReferableElements/Event	Renamed to EventElement Now part of AasSubmodelElements
	RelationshipElement/first	Type changes from model reference Referable to Reference (global or model reference)
	RelationshipElement/second	Type changes from model reference Referable to Reference (global or model reference)
	ValueDataType	Before as specified via DataTypeDef, now any xsd atomic type as specified via DataTypeDefXsd
x	View	Removed

Template 45. New Elements in Metamodel w/o Security

Nc	V3.0RC02 vs. V2.0.1 New Elements	Comment
	AasSubmodelElements	New enumeration used for References Before: ReferableElements
	AasIdentifiables	New enumeration used for References, includes abstract Identifiable Before: Identifiables
	AasReferableNonIdentifiables	New enumeration used for References
	AasReferables	New enumeration used for References, includes abstract Referable
x	AssetAdministrationShell/assetInformation	substitute for AssetAdministrationShell/asset; no reference any longer, instead now aggregation
	AssetInformation	with attributes/functionality from former class Asset, because not specific to Asset but to AAS

Nc	V3.0RC02 vs. V2.0.1 New Elements	Comment
	AssetInformation/assetKind	Former Asset/assetKind
	AssetInformation/globalAssetId	Former Asset/identification/id
	AssetInformation/specificAssetId	Former Asset/assetIdentificationModel
	AssetInformation/thumbnail	Optional Attribute of new class AssetInformation that was not available in Asset class before
	BasicEventElement	Former name: BasicEvent Was part of non-normative part before
	BasicEventElement/direction	Former name: BasicEvent/observed Was part of non-normative part before
	BasicEventElement/lastUpdate	Was part of non-normative part before
	BasicEventElement/messageBroker	Was part of non-normative part before
	BasicEventElement/messageTopic	Was part of non-normative part before
	BasicEventElement/minInterval	Was part of non-normative part before
	BasicEventElement/maxInterval	Was part of non-normative part before
	BasicEventElement/observed	Was part of non-normative part before
	BasicEventElement/state	Was part of non-normative part before
	ContentType	Former name: MimeType
	dateTimeStamp	New data type for metamodel as used in EventPayload
	DataTypeDefRdf	Enumeration for types of Rdf + prefix rdf: added to every value in enumeration
	DataTypeDefXsd	Enumeration consisting of enumerations decimalBuildInTypes, durationBuildInTypes, PrimitiveTypes that correspond to anySimpleTypes of xsd. + added prefix xs: to every value in enumeration
	Direction	New enumeration for BasicEventElement

Nc	V3.0RC02 vs. V2.0.1 New Elements	Comment
	Environment	New class for entry point for Asset Administration Shells, submodels and concept descriptions
	EventElement	Former name: Event
	EventPayload	New class for event payload
	EventPayload/observableSemanticId	Was part of non-normative part before
	EventPayload/payload	Was part of non-normative part before
	EventPayload/source	Was part of non-normative part before
	EventPayload/sourceSemanticId	Was part of non-normative part before
	EventPayload/subjectId	Was part of non-normative part before
	EventPayload/timestamp	Was part of non-normative part before
	Extension	New class, part of new abstract class HasExtensions
	FragmentKeys	New enumeration used for References
	GenericFragmentKeys	New enumeration used for References
	GenericGloballyIdentifiers	New enumeration used for References
	GloballyIdentifiables	New enumeration used for References
	HasExtensions	New abstract class, inherited by Referable
	HasSemantics/supplementalSemanticId	New attribute
	Identifiable/id	Substitute for Identifiable/identification
	IdentifierKeyValuePair	New class for AssetInformation/specificAssetId
	KeyTypes	Before: KeyElements New submodel element SubmodelElementList added, submodel elements Event and BasicEvent to EventElement and BasicEventElement renamed
	Qualifier/kind	New attribute for Qualifier
	QualifierKind	New enumeration for Qualifier/kind

Nc	V3.0RC02 vs. V2.0.1 New Elements	Comment
	PrimitiveTypes	Enumeration for DataTypeDefXsd
	Referable/checksum	New optional attribute for all referables
	Referable/displayName	New optional attribute for all referables
	Reference/referredSemanticId	New optional attribute for Reference
x	Reference/type	New mandatory attribute for Reference
	ReferenceTypes	New enumeration for Reference/type
	StateOfEvent	New enumeration for BasicEventElement
	SpecificAssetId	New type for AssetInformation/specificAssetId
	SpecificAssetId/name	New type for AssetInformation/specificAssetId
	SpecificAssetId/value	New type for AssetInformation/specificAssetId
	SpecificAssetId/externalSubjectId	New type for AssetInformation/specificAssetId See Attribute Based Access Control (ABAC) for subject concept
	SubmodelElementElements	Enumeration for submodel elements (split of ReferableElements)
	SubmodelElementList	Before SubmodelElementCollection was used for lists and structs
	SubmodelElementList/orderRelevant	Similar to SubmodelElementCollection/ordered
	SubmodelElementList/value	Similar to SubmodelElementCollection/value but ordered and with all elements having the same semanticId
	SubmodelElementList/semanticIdListElement	Attribute of new class SubmodelElementList
	SubmodelElementList/typeValueListElement	Attribute of new class SubmodelElementList
	SubmodelElementList/valueTypeListElement	Attribute of new class SubmodelElementList

Template 46. New, Changed or Removed Constraints w/o Security

Nc	V3.0RC02 vs. V2.0.1	New, Update, Removed, Reformulate d	Comment
	AASd-001	Removed	Constraint AASd-001: In case of a referable element not being an identifiable element this ID is mandatory and used for referring to the element in its name space. For namespace part see AASd-022
[3]	AASd-003	Update	idShort is case-sensitive and not case-insensitive Constraint AASd-003: <i>idShort</i> of <i>Referables</i> shall be matched case-sensitive.
	AASd-005	Reformulated	Constraint AASd-005: If <i>AdministrativeInformation/version</i> is not specified than also <i>AdministrativeInformation/revision</i> shall be unspecified. This means, a revision requires a version. if there is no version there is no revision neither. Revision is optional.
	AASd-008	Removed	Constraint AASd-008: The submodel element value of an operation variable shall be of kind=Template.
	AASd-010	Renamed	Renamed and reformulated to AASs-010 (see NEW)
	AASd-011	Renamed	Renamed and reformulated to AASs-011 (see NEW)
	AASd-012	Reformulated	Constraint AASd-012: If both, the <i>MultiLanguageProperty/value</i> and the <i>MultiLanguageProperty/valueId</i> are present then for each string in a specific language the meaning must be the same as specified in <i>MultiLanguageProperty/valueId</i>
	AASd-014	Reformulated	Entity was changed Constraint AASd-014: Either the attribute <i>globalAssetId</i> or <i>specificAssetId</i> of an <i>Entity</i> must be set if <i>Entity/entityType</i> is set to "<i>SelfManagedEntity</i>". They are not existing otherwise.
(x)	AASd-020	New	Constraint AASd-020: The value of <i>Property/value</i> shall be consistent to the data type as defined in <i>Property/valueType</i>.
(x)	AASd-021	New	Constraint AASd-021: Every qualifiable can only have one qualifier with the same <i>Qualifier/type</i>.
	AASd-023	Removed	No Asset any longer that can be referenced as alternative to global reference Constraint AASd-023: <i>AssetInformation/globalAssetId</i> either is a reference to an Asset object or a global reference.
x	AASd-027	New	Constraint AASd-027: <i>idShort</i> of <i>Referables</i> shall have a maximum length of 128 characters.
x	AASd-076	Removed	Substituted by AASc-002; simplified, no reference to concept description
	AASd-077	New	Constraint AASd-077: The name of an extension within <i>HasExtensions</i> needs to be unique.

Nc	V3.0RC02 vs. V2.0.1	New, Update, Removed, Reformulate d	Comment
x	AASd-076	Removed	Substituted by AASc-002; simplified, no reference to concept description
	AASd-077	New	Constraint AASd-077: The name of an extension within HasExtensions needs to be unique.
	AASd-090	Update	Exception: File and Blob data elements removed. Reformulated. Constraint AASd-090: For data elements category (inherited by Referable) shall be one of the following values: CONSTANT, PARAMETER or VARIABLE. Default: VARIABLE
	AASd-100	New	Constraint AASd-100: An attribute with data type "string" is not allowed to be empty.
	AASd-107	New	Constraint AASd-107: If a first level child element in a SubmodelElementList has a semanticId it shall be identical to SubmodelElementList/semanticIdListElement.
	AASd-108	New	Constraint AASd-108: All first level child elements in a SubmodelElementList shall have the same submodel element type as specified in SubmodelElementList/typeValueListElement.
	AASd-109	New	Constraint AASd-109: If SubmodelElementList/typeValueListElement equal to Property or Range SubmodelElementList/valueTypeListElement shall be set and all first level child elements in the SubmodelElementList shall have the value type as specified in SubmodelElementList/valueTypeListElement.
	AASd-114	New	Constraint AASd-114: If two first level child elements in a SubmodelElementList have a semanticId then they shall be identical.
	AASd-115	New	Constraint AASd-115: If a first level child element in a SubmodelElementList does not specify a semanticId then the value is assumed to be identical to SubmodelElementList/semanticIdListElement.
	AASd-116	New	Constraint AASd-116: "globalAssetId" (case-insensitive) is a reserved key. If used as value for SpecificAssetId/name IdentifierKeyValuePair/value shall be identical to AssetInformation/globalAssetId.
	AASd-117	New	Needed because Referable/idShort now optional Constraint AASd-117: idShort of non-identifiable Referables not equal to SubmodelElementList shall be specified (i.e. idShort is mandatory for all Referables except for SubmodelElementLists and all Identifiables).
	AASd-118	New	Because of new attribute supplementalSemanticId for HasSemantics Constraint AASd-118: If there is a supplemental semantic ID (HasSemantics/supplementalSemanticId) defined then there shall be also a main semantic ID (HasSemantics/semanticId).

Nc	V3.0RC02 vs. V2.0.1	New, Update, Removed, Reformulate d	Comment
	AASd-119	New	New qualifier/kind attribute Constraint AASd-119: If any Qualifier/kind value of a Qualifiable/qualifier is equal to TemplateQualifier and the qualified element inherits from "hasKind" then the qualified element shall be of kind Template (HasKind/kind = "Template").
	AASd-120	New	For new submodel element SubmodelElementList Constraint AASD-120: idShort of submodel elements within a SubmodelElementList shall not be specified.
	AASd-121	New	Constraint AASd-121: For References the type of the first key of Reference/keys shall be one of GloballyIdentifiables.
	AASd-122	New	Constraint AASd-122: For global references, i.e. References with Reference/type = GlobalReference, the type of the first key of Reference/keys shall be one of GenericGloballyIdentifiables.
	AASd-123	New	Constraint AASd-123: For model references, i.e. References with Reference/type = ModelReference, the type of the first key of Reference/keys shall be one of AasIdentifiables.
	AASd-124	New	Constraint AASd-124: For global references, i.e. References with Reference/type = GlobalReference, the last key of Reference/keys shall be either one of GenericGloballyIdentifiables or one of GenericFragmentKeys.
	AASd-125	New	Constraint AASd-125: For model references, i.e. References with Reference/type = ModelReference, with more than one key in Reference/keys the type of the keys following the first key of Reference/keys shall be one of FragmentKeys.
	AASd-126	New	Constraint AASd-126: For model references, i.e. References with Reference/type = ModelReference, with more than one key in Reference/keys the type of the last Key in the reference key chain may be one of GenericFragmentKeys or no key at all shall have a value out of GenericFragmentKey.
	AASd-127	New	Constraint AASd-127: For model references, i.e. References with Reference/type = ModelReference, with more than one key in Reference/keys a key with type FragmentReference shall be preceded by a key with type File or Blob. All other AAS fragments, i.e. type values out of AasSubmodelElements, do not support fragments.
	AA-128	New	Constraint AASd-128: For model references, i.e. References with Reference/type = ModelReference, the Key/value of a Key preceded by a Key with Key/type=SubmodelElementList is an integer number denoting the position in the array of the submodel element list.

Metamodel Changes V3.0RC02 vs. V2.0.1 – Data Specification IEC61360

Template 47. Changes w.r.t. Data Specification IEC61360

Nc	V3.0RC02 Change w.r.t. V2.0.1	Comment
	DataSpecification	Stereotype <<Template>> added + does not inherit from Identifiable any longer because Data Specification are handled in a different way Some attributes are added to DataSpecification as new attributes like id, administration and description (see separate entries).
	DataSpecification/category	Removed, was inherited before by Identifiable
	DataSpecification/displayName	Removed, was inherited before by Identifiable
	DataSpecification/idShort	Removed, was inherited before by Identifiable
x	DataSpecificationIEC61360/value	Type changed from ValueDataType to string
	DataSpecificationIEC61360/valueId	Removed, the valueId is identical to the ID of the concept description
	DataSpecificationContent	Stereotype <<Template>> added
x	DataTypeIEC61360	Some new values were added: BLOB, FILE, HTML, IRDI. URL renamed to IRI. + See separate entries for individual changes.
x	DataTypeIEC61360/URL	Renamed to IRI
	ValueList/valueReferencePairs	Bugfix, was ValueList/valueReferencePairTypes before
x	ValueReferencePair/value	Type changed from ValueDataType to string

Template 48. New Elements in Metamodel DataSpecification IEC61360

Nc	V3.0RC02 vs. V2.0.1	Comment
	DataSpecification/administration	Was inherited before by Identifiable
	DataSpecification/id	Was inherited before by Identifiable
	DataSpecification/description	Was inherited before by Identifiable
	DataTypeIEC61360/BLOB	New value
	DataTypeIEC61360/FILE	New value
	DataTypeIEC61360/HTML	New value
	DataTypeIEC61360/IRDI	New value

Nc	V3.0RC02 vs. V2.0.1	Comment
	DataTypeIEC61360/IRI	Converted Iri to CamelCase and renamed to Iri from URL

Template 49. New, Changed or Removed Constraints Data Specification IEC61360

Nc	V3.0RC02 vs. V2.0.1	New, Update, Removed, Reformulated	Comment
	AASc-002	New	Updated version of AASd-076, renamed to AASc-002 because applicable to data specification IEC61360 Constraint AASc-002: DataSpecificationIEC61360/preferredName shall be provided at least in English
(x)	AASc-003	New	Constraint AASc-003: For a ConceptDescription with category VALUE using data specification template IEC61360 (http://admin-shell.io/DataSpecificationTemplates/DataSpecificationIEC61360/2/0) - DataSpecificationIEC61360/value shall be set.
(x)	AASc-004	New	Constraint AASc-004: For a ConceptDescription with category PROPERTY or VALUE using data specification template IEC61360 (http://admin-shell.io/DataSpecificationTemplates/DataSpecificationIEC61360/2/0) - DataSpecificationIEC61360/dataType is mandatory and shall be defined.
(x)	AASc-005	New	Constraint AASc-005: For a ConceptDescription with category REFERENCE using data specification template IEC61360 (http://admin-shell.io/DataSpecificationTemplates/DataSpecificationIEC61360/2/0) - DataSpecificationIEC61360/dataType is STRING by default.
(x)	AASc-006	New	Constraint AASc-006: For a ConceptDescription with category DOCUMENT using data specification template IEC61360 (http://admin-shell.io/DataSpecificationTemplates/DataSpecificationIEC61360/2/0) - DataSpecificationIEC61360/dataType shall be one of the following values: STRING or URL.
(x)	AASc-007	New	Constraint AASc-007: For a ConceptDescription with category QUALIFIER_TYPE using data specification template IEC61360 (http://admin-shell.io/DataSpecificationTemplates/DataSpecificationIEC61360/2/0) - DataSpecificationIEC61360/dataType is mandatory and shall be defined.
(x)	AASc-008	New	Constraint AASc-008: For a ConceptDescriptions except for a ConceptDescription of category VALUE using data specification template IEC61360 (http://admin-shell.io/DataSpecificationTemplates/DataSpecificationIEC61360/2/0) - DataSpecificationIEC61360/definition is mandatory and shall be defined at least in English.
(x)	AASc-009	New	Constraint AASc-009: If DataSpecificationIEC61360/dataType one of: INTEGER_MEASURE, REAL_MEASURE, RATIONAL_MEASURE, INTEGER_CURRENCY, REAL_CURRENCY, then DataSpecificationIEC61360/unit or DataSpecificationIEC61360/unitId shall be defined.

Nc	V3.0RC02 vs. V2.0.1	New, Update, Removed, Reformulated	Comment
(x)	AASc-010	New	Constraint AASc-010: If DataSpecificationIEC61360/value is not empty then DataSpecificationIEC61360/valueList shall be empty and vice versa

Metamodel Changes V3.0RC02 vs. V2.0.1 – Security Part

Changes:

- Removed, because deprecated: policy decision point, policy enforcement point, and policy information points are not part of information model but of server infrastructure hosting the Asset Administration Shells
- Removed: Certificate Handling not part of information model but of server infrastructure hosting the Asset Administration Shells

Template 50. Changes w.r.t. Security

Nc	V3.0RC02 Change w.r.t. V2.0.1	Comment
x	AccessControlPolicyPoints/policyAdministrationPoint	Type changed from PolicyAdministrationPoint to AccessControl
x	AccessControlPolicyPoints/policyDecisionPoint	Removed
x	AccessControlPolicyPoints/policyEnforcementPoint	Removed
x	AccessControlPolicyPoints/policyInformationPoint	Removed
x	AccessPermissionRule	No longer inherits from Referable No longer inherits from Qualifiable
x	BlobCertificate	Removed
x	Certificate	Removed
x	Formula	Now abstract class, only used in security part (no longer used in Qualifiables)
x	Formula/dependsOn	Removed attribute
x	PolicyAdministrationPoint	Removed
x	policyDecisionPoint	Removed
x	policyEnforcementPoint	Removed
x	policyInformationPoints	Removed
x	Security/certificate	Removed
x	Security/requiredCertificateExtension	Removed

Template 51. New Elements in Metamodel Security

Nc	V3.0RC02 vs. V2.0.1	Comment
	AccessPermissionRule/constraint	Substitute for inherited attributes from Qualifiable

Template 52. New, Changed or Removed Constraints Security

Nc	V3.0RC02 vs. V2.0.1	New, Update, Removed, Reformulated	Comment
	AASd-015	Removed	Renamed to AASS-015 (see NEW)
	AASS-009	Removed	Removed since class PolicyAdministrationPoint was removed Constraint AASS-009: either there is an external policy administration point endpoint defined (PolicyAdministrationPoint/externalPolicyDecisionPoints=true) or the AAS has its own access control
	AASS-010	NEW	Reformulation of AASd-010 Constraint AASS-010: the property referenced in Permission/permission shall have the category "CONSTANT".
	AASS-011	NEW	Reformulation of AASd-011 Constraint AASS-011: the property referenced in Permission/permission shall be part of the submodel that is referenced within the "selectablePermissions" attribute of "AccessControl".
	AASS-015	NEW	Constraint AASS-015: every data element in SubjectAttributes/subjectAttributes shall be part of the submodel that is referenced within the "selectableSubjectAttributes" attribute of "AccessControl".

Changes V3.0RC02 vs. V3.0RC01

Metamodel Changes V3.0RC02 vs. V3.0RC01 w/o Security Part

Major changes:

- CHANGED: Split of SubmodelElementCollection into SubmodelElementList (with orderRelevant) and SubmodelElementCollection
- CHANGED: Reference type and referredSemanticId added to Reference; Local and Parent attributes removed from Reference. Logical enumeration concept updated. Some renaming; constraints added for references
- CHANGED: Reference/type now as optional part of string serialization of reference
- CHANGED: idType from identifier removed, ID now string.
- CHANGED: idShort of Referable now optional + Constraints added with respect to id and idShort
- REMOVED: AssetInformation/billOfMaterial removed
- REMOVED: Asset removed
- REMOVED: Views removed, because no longer supported
- NEW: Event and BasicEvent updated and renamed to EventElement and BasicEventElement
- NEW: Checksum introduced for Referables

- REMOVED: security attribute removed from Asset Administration Shell; access control remains part of the specification
- ENHANCED: DataTypeIEC61360 extended with values for IRI, IRDI, BLOB, FILE + corresponding new constraints added
- ENHANCED: Removed and split into DataTypeDefXsd and DataTypeDefRdf; some types are excluded and not supported
- CHANGED: Mapping rules for different serializations + schemata + example in different serializations extracted and no longer part of this specification
- EDITORIAL: Text updated, no kind column any longer in class tables, instead notation of ModelReference<{Referable}>. New table for Primitives/Data Types
- EDITORIAL: New clause "Introduction"
- EDITORIAL: New clause "Matching strategies for semantic identifiers"
- NEW: Environment
- NEW: supplemental Semantic IDs
- NEW: Qualifier/kind
- CHANGED: Renaming of IdentifierKeyValuePair used in AssetInformation to SpecificAssetId

Bugfixes:

- bugfix annotation AnnotatedRelationship is of type aggr and not ref* (diagram was correct)
- bugfix specification of ValueList and ValueReferencePairType, no data types, normal classes
- bugfix table specifications w.r.t. kind of attribute (from aggr to attr – column kind was removed, see above)
- bugfix data type specification LangStringSet (no diagram and table any longer)
- bugfix enumeration ReferableElements, no ConceptDictionary any longer + new elements like new submodel elements SubmodelElementList added
- Entity/globalAssetId diagram (table was correct): Type change from reference of Reference to Reference (from Reference* to Reference)

Template 53. Changes w/o Security

Nc	V3.0RC02 Change w.r.t. V3.0RC01	Comment
	AdministrativeInformation	Bugfix: Stereotype "DataType" added
	AnnotatedRelationship/annotation	Type changed from ModelReference< DataElement > to DataElement
x	Asset	Removed, asset referenced via globalAssetId only
x	AssetAdministrationShell/security	Removed Note: Security is still part of the Asset Administration Shell, but the Asset Administration Shell and its elements are referenced from Security
	AssetAdministrationShell/view	Removed, views no longer supported
x	AssetInformation/billOfMaterial	Removed

Nc	V3.0RC02 Change w.r.t. V3.0RC01	Comment
x	AssetInformation/defaultThumbnail	Type changed from File to Resource
x	AssetInformation/specificAssetId	Type changed from IdentifierKeyValuePair to SpecificAssetId
x	BasicEvent	Renamed to BasicEventElement
x	Constraint	Abstract class removed. Formula now used in Security part only
(x)	DataTypeDef	Split into DataTypeDefXsd and DataTypeDefRdf. Some types excluded and not supported (see notes in corresponding clause) Before: just string allowing all anySimpleTypes of xsd and langString of rdf
	Entity/globalAssetId	Bugfix: Type change from reference of Reference to Reference (from Reference* to Reference)
x	Event	Renamed to EventElement
x	Extension/refersTo	Type changed from Reference to ModelReference< Referable >
x	File/mimeType	Renamed to contentType + Type name changed from MimeType to ContentType
x	Formula	Now abstract class now used in Security part only
x	Formula/dependsOn	Removed since formula language not yet defined
x	Identifiable/identification	Removed Substituted by Identifiable/id
(x)	IdentifiableElements	Renamed to AasIdentifiables
x	Identifier	Type changed Before struct class with two attributes: id and idType; now string data type only
x	IdentifierKeyValuePair	Renamed to SpecificAssetId and change of attribute "key" to "name"
	IdentifierType	Enumeration removed because no idType any longer
x	Key/idType	removed

Nc	V3.0RC02 Change w.r.t. V3.0RC01	Comment
(x)	KeyElements	Renamed to KeyTypes Note: the elements remain, except for new SubmodelElementList and renamed submodel elements Event and BasicEvent to EventElement and BasicEventElement
	KeyType	Enumeration removed because no Key/idType any longer
	LocalKeyType	Enumeration removed because no Key/idType any longer
x	MimeType	Type name changed to ContentType
	Property/valueType	Type changed from DataTypeDef to DataTypeDefXsd
x	Qualifiable/qualifier	Type changed from Constraint to Qualifier
	Qualifier	Does not inherit from abstract class "Constraint" any longer
	Qualifier/valueType	Type changed from DataTypeDef to DataTypeDefXsd
	Range/valueType	Type changed from DataTypeDef to DataTypeDefXsd
	Referable/idShort	Now optional, was mandatory
x	ReferableElements	Substituted with enumeration AasSubmodelElements and AasIdentifiables
x	ReferableElements/AccessPermissionRule	Removed from enumeration, AccessPermissionRule is no longer referable Not part of new AasReferableNonIdentifiables
x	ReferableElement/BasicEvent	Renamed to BasicEventElement Now part of AasSubmodelElements
(x)	ReferablesElements/ConceptDictionary	Bugfix: ConceptDictionary removed from enumeration since ConceptDictionary no longer part of specification Not part of new KeyTypes
x	ReferableElements/Event	Renamed to EventElement Now part of AasSubmodelElements
	RelationshipElement/first	Type changes from model reference Referable to Reference (global or model reference)
	RelationshipElement/second	Type changes from model reference Referable to Reference (global or model reference)

Nc	V3.0RC02 Change w.r.t. V3.0RC01	Comment
	ValueDataType	Before as specified via DataTypeDef, now any xsd atomic type as specified via DataTypeDefXsd + Prefix xs: added to every value in list
x	ValueList/valueReferencePairType	Bugfix: renamed to ValueList/valueReferencePairs
x	View	removed

Template 54. New Elements in Metamodel w/o Security

Nc	V3.0RC02 vs. V2.0RC01 New Elements	Comment
	AasSubmodelElements	New enumeration used for References Before ReferableElements
	AasIdentifiables	New enumeration used for References, includes abstract Identifiable Before: Identifiables
	AasReferableNonIdentifiables	New enumeration used for References
	AasReferables	New enumeration used for References, includes abstract Referable
	BasicEventElement	Former name: BasicEvent
	BasicEventElement/direction	
	BasicEventElement/lastUpdate	
	BasicEventElement/messageBroker	
	BasicEventElement/messageTopic	
	BasicEventElement/minInterval	
	BasicEventElement/maxInterval	
	BasicEventElement/observed	Former name: BasicEvent/observed
	BasicEventElement/state	
	ContentType	Former name: MimeType
	DataTypeDefRdf	Enumeration for types of Rdf + prefix rdf: added to every value in enumeration
	DataTypeDefXsd	Enumeration consisting of enumerations decimalBuildInTypes, durationBuildInTypes, PrimitiveTypes that correspond to anySimpleTypes of xsd. + prefix xs: added to every value in enumeration

Nc	V3.0RC02 vs. V2.0RC01 New Elements	Comment
	dateTimeStamp	New data type for metamodel as used in EventPayload
	decimalBuildInTypes	Enumeration for DataTypeDef
	Direction	New enumeration for BasicEventElement
	durationBuildInTypes	Enumeration for DataTypeDef
	Environment	New class for entry point for Asset Administration Shells, submodels and concept descriptions
	EventElement	Former name: Event
	EventPayload	New class for event payload
	EventPayload/observableReference	
	EventPayload/observableSemanticId	
	EventPayload/payload	
	EventPayload/source	
	EventPayload/sourceSemanticId	
	EventPayload/subjectId	
	EventPayload/timestamp	
	EventPayload/topic	
	File/contentType	Former name: mimeType
	FragmentKeys	New enumeration used for References
	GenericFragmentKeys	New enumeration used for References
	GenericGloballyIdentifiers	New enumeration used for References
	GloballyIdentifiables	New enumeration used for References
	HasSemantics/supplementalSemanticId	New attribute
	Identifiable/id	Substitute for Identifiable/identification
	KeyTypes	Before: KeyElements New submodel element SubmodelElementList added, renamed submodel elements Event and BasicEvent to EventElement and BasicEventElement
	ModelReference	New class inheriting from Reference

Nc	V3.0RC02 vs. V2.0RC01 New Elements	Comment
x	Reference/type	New mandatory attribute of Reference
	Reference/referredSemanticId	New optional attribute of Reference
	PrimitiveTypes	Enumeration for DataTypeDefXsd
	Qualifier/kind	New attribute for Qualifier
	QualifierKind	New enumeration for Qualifier/kind
	Referable/checksum	
	SpecificAssetId	Before: IdentifierKeyValuePair, was renamed
	SpecificAssetId/name	Before: IdentifierKeyValuePair/key, was renamed
	SpecificAssetId/value	Before: IdentifierKeyValuePair/value
	SpecificAssetId/externalSubjectId	Before: IdentifierKeyValuePair/externalSubjectId
	StateOfEvent	New enumeration for BasicEventElement
	SubmodelElementElements	Enumeration for submodel elements (split of ReferableElements into SubmodelElementElements and IdentifiableElements)
	SubmodelElementList	Before SubmodelElementCollection was used for lists and structs
	SubmodelElementList/orderRelevant	Similar to SubmodelElementCollection/ordered
	SubmodelElementList/value	Similar to SubmodelElementCollection/value but ordered and with all elements having the same semanticId
	SubmodelElementList/semanticIdListElement	Attribute for new class SubmodelElementList
	SubmodelElementList/typeValueListElement	Attribute for new class SubmodelElementList
	SubmodelElementList/valueTypeListElement	Attribute for new class SubmodelElementList

Template 55. New, Changed or Removed Constraints w/o Security

Nc	V3.0RC02 vs. V3.0RC01	New, Update, Removed, Reformulated	Comment
[4]	AASd-003	Update	idShort is case-sensitive and not case-insensitive Constraint AASd-003: <i>idShort</i> of <i>Referables</i> shall be matched case-sensitive.

Nc	V3.0RC02 vs. V3.0RC01	New, Update, Removed, Reformulated	Comment
	AASd-005	Reformulated	Constraint AASd-005: If AdministrativeInformation/version is not specified than also AdministrativeInformation/revision shall be unspecified. This means, a revision requires a version. if there is no version there is no revision neither. Revision is optional.
	AASd-008	Removed	Constraint AASd-008: The submodel element value of an operation variable shall be of kind=Template.
	AASd-023	Removed	No Asset any longer that can be referenced as alternative to global reference Constraint AASd-023: AssetInformation/globalAssetId either is a reference to an Asset object or a global reference.
	AASd-026	Removed	SubmodelElementCollection was split into SubmodelElementList and SubmodelElementRecord. No attribute allowDuplicates any longer. Constraint AASd-026: If allowDuplicates==false then it is not allowed that the collection contains several elements with the same semantics (i.e. the same semanticId).
x	AASd-027	New	Constraint AASd-027: <i>idShort</i> of <i>Referables</i> shall have a maximum length of 128 characters.
	AASd-050	Update	Version information in data specification ID updated to /3/0/RC02. hasDataSpecification corrected to HasDataSpecification Constraint AASd-050: If the <i>DataSpecificationContent</i> <i>DataSpecificationIEC61360</i> is used for an element then the value of <i>HasDataSpecification/dataSpecification</i> shall contain the global reference to the IRI of the corresponding data specification template https://admin-shell.io/DataSpecificationTemplates/DataSpecificationIEC61360/3/0/RC02 .
(x)	AASd-050b	New	Constraint AASd-050b: If the <i>DataSpecificationContent</i> <i>DataSpecificationPhysicalUnit</i> is used for an element then the value of <i>HasDataSpecification/dataSpecification</i> shall contain the global reference to the IRI of the corresponding data specification template https://admin-shell.io/DataSpecificationTemplates/DataSpecificationPhysicalUnit0/3/0/RC02 .
	AASd-052a	Removed	removed, still recommended; would be renamed to AASc if still needed Constraint AASd-052a: If the semanticId of a Property references a ConceptDescription then the ConceptDescription/category shall be one of following values: VALUE, PROPERTY.
	AASd-052b	Removed	removed, still recommended; would be renamed to AASc if still needed Constraint AASd-052b: If the semanticId of a MultiLanguageProperty references a ConceptDescription then the ConceptDescription/category shall be one of following values: PROPERTY.

Nc	V3.0RC02 vs. V3.0RC01	New, Update, Removed, Reformulated	Comment
	AASd-053	Removed	removed, still recommended; would be renamed to AASc if still needed Constraint AASd-053: If the semanticId of a Range submodel element references a ConceptDescription then the ConceptDescription/category shall be one of following values: PROPERTY.
	AASd-054	Removed	removed, still recommended; would be renamed to AASc if still needed Constraint AASd-054: If the semanticId of a ReferenceElement submodel element references a ConceptDescription then the ConceptDescription/category shall be one of following values: REFERENCE.
	AASd-055	Removed	removed, still recommended; would be renamed to AASc if still needed Constraint AASd-055: If the semanticId of a RelationshipElement or an AnnotatedRelationshipElement submodel element references a ConceptDescription then the ConceptDescription/category shall be one of following values: RELATIONSHIP.
	AASd-056	Removed	removed, still recommended; would be renamed to AASc if still needed Constraint AASd-056: If the semanticId of an Entity submodel element references a ConceptDescription then the ConceptDescription/category shall be one of following values: ENTITY. The ConceptDescription describes the elements assigned to the entity via Entity/statement.
	AASd-057	Removed	removed, still recommended; would be renamed to AASc if still needed Constraint AASd-057: The semanticId of a File or Blob submodel element shall only reference a ConceptDescription with the category DOCUMENT.
	AASd-058	Removed	removed, still recommended; would be renamed to AASc if still needed Constraint AASd-058: The semanticId of a Capability submodel element shall only reference a ConceptDescription with the category CAPABILITY.
	AASd-059	Removed	removed, still recommended; would be renamed to AASc if still needed SubmodelElementCollection was split into SubmodelElementList and SubmodelElementCollection. AASd-092 and AASd-093 contain it. Constraint AASd-059: If the semanticId of a SubmodelElementCollection references a ConceptDescription then the category of the ConceptDescription shall be COLLECTION or ENTITY.
	AASd-060	Removed	removed, still recommended; would be renamed to AASc if still needed Constraint AASd-060: If the semanticId of an Operation submodel element references a ConceptDescription then the category of the ConceptDescription shall be one of the following values: FUNCTION.

Nc	V3.0RC02 vs. V3.0RC01	New, Update, Removed, Reformulated	Comment
	AASd-061	Removed	removed, still recommended; would be renamed to AASc if still needed Constraint AASd-061: If the <i>semanticId</i> of an Event submodel element references a <i>ConceptDescription</i> then the category of the <i>ConceptDescription</i> shall be one of the following values: EVENT.
	AASd-062	Removed	removed, still recommended; would be renamed to AASc if still needed Constraint AASd-062: If the <i>semanticId</i> of a <i>Property</i> references a <i>ConceptDescription</i> then the <i>ConceptDescription/category</i> shall be one of following values: APPLICATION_CLASS.
	AASd-063	Removed	removed, still recommended; would be renamed to AASc if still needed Constraint AASd-063: If the <i>semanticId</i> of a <i>Qualifier</i> references a <i>ConceptDescription</i> then the <i>ConceptDescription/category</i> shall be one of following values: QUALIFIER.
	AASd-064	Removed	Removed because there are not VIEWS any longer Constraint AASd-064: If the <i>semanticId</i> of a <i>View</i> references a <i>ConceptDescription</i> then the category of the <i>ConceptDescription</i> shall be <i>VIEW</i> .
	AASd-065	Removed	removed, still recommended; would be renamed to AASc if still needed Constraint AASd-065: If the <i>semanticId</i> of a <i>Property</i> or <i>MultiLanguageProperty</i> references a <i>ConceptDescription</i> with the category VALUE then the value of the property is identical to <i>DataSpecificationIEC61360/value</i> and the <i>valueId</i> of the property is identical to <i>DataSpecificationIEC61360/valueId</i> .
	AASd-066	Removed	removed, still recommended; would be renamed to AASc if still needed Update because of renaming of <i>ValueReferencePairType</i> into <i>ValueReferencePair</i> Constraint AASd-066: If the <i>semanticId</i> of a <i>Property</i> or <i>MultiLanguageProperty</i> references a <i>ConceptDescription</i> with the category PROPERTY and <i>DataSpecificationIEC61360/valueList</i> is defined the value and <i>valueId</i> of the property is identical to one of the value reference pair types references in the value list, i.e. <i>ValueReferencePair/value</i> or <i>ValueReferencePair/valueId</i> , resp.
	AASd-067	Removed	removed, still recommended; would be renamed to AASc if still needed Constraint AASd-067: If the <i>semanticId</i> of a <i>MultiLanguageProperty</i> references a <i>ConceptDescription</i> then <i>DataSpecificationIEC61360/dataType</i> shall be STRING_TRANSLATABLE.
	AASd-068	Removed	removed, still recommended; would be renamed to AASc if still needed Constraint AASd-068: If the <i>semanticId</i> of a <i>Range</i> submodel element references a <i>ConceptDescription</i> then <i>DataSpecificationIEC61360/dataType</i> shall be a numerical one, i.e. REAL_* or RATIONAL_*.

Nc	V3.0RC02 vs. V3.0RC01	New, Update, Removed, Reformulated	Comment
	AASd-069	Removed	removed, still recommended; would be renamed to AASc if still needed Constraint AASd-069: If the semanticId of a Range references a ConceptDescription then DataSpecificationIEC61360/levelType shall be identical to the set \{Min, Max\}.
(x)	AASd-070	Renamed	Now AASc-004.
(x)	AASd-071	Renamed	Now AASc-005
(x)	AASd-072	Renamed	Now AASc-006.
(x)	AASd-073	Renamed	Now AASc-007
(x)	AASd-074	Renamed	Now AASc-008
	AASd-075	Removed	Content now documented as separate constraints Constraint AASd-075: For all ConceptDescriptions using data specification template IEC61360 (http://admin-shell.io/DataSpecificationTemplates/DataSpecificationIEC61360/2/0) values for the attributes not being marked as mandatory or optional in tables depending on its category are ignored and handled as undefined.
	AASd-076	Removed	Substituted by AASc-002. Simplified, no reference to concept description
	AASd-080	Removed	No <i>Key/type</i> GlobalReference any longer {aasd080}
	AASd-081	Removed	No <i>Key/idType</i> any longer {aasd081}
	AASd-090	Update	Exception: File and Blob data elements removed. Reformulated. Constraint AASd-090: For data elements category (inherited by Referable) shall be one of the following values: CONSTANT, PARAMETER or VARIABLE. Default: VARIABLE
	AASd-092	Removed	removed, still recommended; would be renamed to AASc and updated if still needed SubmodelElementCollection was split into SubmodelElementList and SubmodelElementCollection (here: SubmodelElementCollection) Constraint AASd-092: If the semanticId of a SubmodelElementCollection with SubmodelElementCollection/allowDuplicates == false references a ConceptDescription then the ConceptDescription/category shall be ENTITY.

Nc	V3.0RC02 vs. V3.0RC01	New, Update, Removed, Reformulated	Comment
	AASd-093	Removed	removed, still recommended; would be renamed to AASc and updated if still needed SubmodelElementCollection was split into SubmodelElementList and SubmodelElementStruct (here: SubmodelElementList) Constraint AASd-093: If the semanticId of a SubmodelElementCollection with SubmodelElementCollection/allowDuplicates == true references a ConceptDescription then the ConceptDescription/category shall be COLLECTION.
	AASd-107	New	Constraint AASd-107: If a first level child element in a SubmodelElementList has a semanticId it shall be identical to SubmodelElementList/semanticIdListElement.
	AASd-108	New	Constraint AASd-108: All first level child elements in a SubmodelElementList shall have the same submodel element type as specified in SubmodelElementList/typeValueListElement.
	AASd-109	New	Constraint AASd-109: If SubmodelElementList/typeValueListElement equal to Property or Range SubmodelElementList/valueTypeListElement shall be set and all first level child elements in the SubmodelElementList shall have the value type as specified in SubmodelElementList/valueTypeListElement.
	AASd-114	New	Constraint AASd-114: If two first level child elements in a SubmodelElementList have a semanticId then they shall be identical.
	AASd-115	New	Constraint AASd-115: If a first level child element in a SubmodelElementList does not specify a semanticId then the value is assumed to be identical to SubmodelElementList/semanticIdListElement.
	AASd-116	New	Constraint AASd-116: "globalAssetId" (case-insensitive) is a reserved key. If used as value for SpecificAssetId/name IdentifierKeyValuePair/value shall be identical to AssetInformation/globalAssetId.
	AASd-117	New	Needed because Referable/idShort now optional Constraint AASd-117: idShort of non-identifiable Referables not equal to SubmodelElementList shall be specified (i.e. idShort is mandatory for all Referables except for SubmodelElementLists and all Identifiables).
	AASd-118	New	Constraint AASd-118: If there is a supplemental semantic ID (HasSemantics/supplementalSemanticId) defined then there shall be also a main semantic ID (HasSemantics/semanticId).
	AASd-119	New	New Qualifier/kind attribute Constraint AASd-119: If any Qualifier/kind value of a Qualifiable/qualifier is equal to TemplateQualifier and the qualified element inherits from "hasKind" then the qualified element shall be of kind Template (HasKind/kind = "Template").

Nc	V3.0RC02 vs. V3.0RC01	New, Update, Removed, Reformulated	Comment
	AASd-120	New	For new submodel element SubmodelElementList Constraint AASD-120: idShort of submodel elements within a SubmodelElementList shall not be specified.
	AASd-121	New	Constraint AASd-121: For References the type of the first key of Reference/keys shall be one of GloballyIdentifiables.
	AASd-122	New	Constraint AASd-122: For global references, i.e. References with Reference/type = GlobalReference, the type of the first key of Reference/keys shall be one of GenericGloballyIdentifiables.
	AASd-123	New	Constraint AASd-123: For model references, i.e. References with Reference/type = ModelReference, the type of the first key of Reference/keys shall be one of AasIdentifiables.
	AASd-124	New	Constraint AASd-124: For global references, i.e. References with Reference/type = GlobalReference, the last key of Reference/keys shall be either one of GenericGloballyIdentifiables or one of GenericFragmentKeys.
	AASd-125	New	Constraint AASd-125: For model references, i.e. References with Reference/type = ModelReference, with more than one key in Reference/keys the type of the keys following the first key of Reference/keys shall be one of FragmentKeys.
	AASd-126	New	Constraint AASd-126: For model references, i.e. References with Reference/type = ModelReference, with more than one key in Reference/keys the type of the last Key in the reference key chain may be one of GenericFragmentKeys or no key at all shall have a value out of GenericFragmentKey.
	AASd-127	New	Constraint AASd-127: For model references, i.e. References with Reference/type = ModelReference, with more than one key in Reference/keys a key with type FragmentReference shall be preceded by a key with type File or Blob. All other AAS fragments, i.e. type values out of AasSubmodelElements, do not support fragments.
	AAS-128	New	Constraint AASd-128: For model references, i.e. References with Reference/type = ModelReference, the Key/value of a Key preceded by a Key with Key/type=SubmodelElementList is an integer number denoting the position in the array of the submodel element list.

Metamodel Changes V3.0RC02 vs. V3.0RC01 – Data Specification IEC61360

Template 56. Changes w.r.t. Data Specification IEC61360

Nc	V3.0RC02 Change w.r.t. V3.0RC01	Comment
	DataSpecification	Stereotype <<Template>> added + does not inherit from Identifiable any longer because Data Specification are handled differently Some attributes are added to DataSpecification as new attributes like id, administration and description
	DataSpecification/category	Removed, was inherited before by Identifiable
	DataSpecification/displayName	Removed, was inherited before by Identifiable
	DataSpecification/idShort	Removed, was inherited before by Identifiable
	DataSpecificationIEC61360/unitId	Type changes from Reference to GlobalReference
x	DataSpecificationIEC61360/value	Type changed from ValueDataType to string
	DataSpecificationIEC61360/valueId	Removed, the valueId is identical to the ID of the concept description
	DataSpecificationContent	Stereotype <<Template>> added
x	DataTypeIEC61360	Some new values were added: BLOB, FILE, HTML, IRDI; URL renamed to IRI See separate entries for individual changes
x	DataTypeIEC61360/URL	Renamed to IRI
	ValueList/valueReferencePairs	Bugfix, was ValueList/valueReferencePairTypes before
x	ValueReferencePair/value	Type changed from ValueDataType to string

Template 57. New Elements in Metamodel DataSpecification IEC61360

Nc	V3.0RC02	Comment
x	ValueReferencePair/valueId	Type changed from Reference to GlobalReference
	DataSpecification/administration	Was inherited before by Identifiable
	DataSpecification/id	Was inherited before by Identifiable
	DataSpecification/description	Was inherited before by Identifiable
	DataTypeIEC61360/BLOB	New value
	DataTypeIEC61360/FILE	New value
	DataTypeIEC61360/HTML	New value
	DataTypeIEC61360/IRDI	New value

Nc	V3.0RC02	Comment
	DataTypeIEC61360/IRI	Converted Iri to CamelCase and renamed to Iri from URL

Template 58. New, Changed or Removed Constraints Data Specification IEC61360

Nc	V3.0RC02	New, Update, Removed, Reformulated	Comment
	AASc-002	New	Updated version of AASd-076, renamed to AASC-002 because applicable to data specification IEC61360 Constraint AASc-002: DataSpecificationIEC61360-/preferredName shall be provided at least in English
(x)	AASc-003	New	Constraint AASc-003: For a ConceptDescription with category VALUE using data specification template IEC61360 (http://admin-shell.io/DataSpecificationTemplates/DataSpecificationIEC61360/2/0) DataSpecificationIEC61360/value shall be set.
(x)	AASc-004	New	Constraint AASc-004: For a ConceptDescription with category PROPERTY or VALUE using data specification template IEC61360 (http://admin-shell.io/DataSpecificationTemplates/DataSpecificationIEC61360/2/0) - DataSpecificationIEC61360/dataType is mandatory and shall be defined.
(x)	AASc-005	New	Constraint AASc-005: For a ConceptDescription with category REFERENCE using data specification template IEC61360 (http://admin-shell.io/DataSpecificationTemplates/DataSpecificationIEC61360/2/0) - DataSpecificationIEC61360/dataType is STRING by default.
(x)	AASc-006	New	Constraint AASc-006: For a ConceptDescription with category DOCUMENT using data specification template IEC61360 (http://admin-shell.io/DataSpecificationTemplates/DataSpecificationIEC61360/2/0) - DataSpecificationIEC61360/dataType shall be one of the following values: STRING or URL.
(x)	AASc-007	New	Constraint AASc-007: For a ConceptDescription with category QUALIFIER_TYPE using data specification template IEC61360 (http://admin-shell.io/DataSpecificationTemplates/DataSpecificationIEC61360/2/0) - DataSpecificationIEC61360/dataType is mandatory and shall be defined.
(x)	AASc-008	New	Constraint AASc-008: For a ConceptDescriptions except for a ConceptDescription of category VALUE using data specification template IEC61360 (http://admin-shell.io/DataSpecificationTemplates/DataSpecificationIEC61360/2/0) - DataSpecificationIEC61360/definition is mandatory and shall be defined at least in English.
(x)	AASc-009	New	Constraint AASc-009: If DataSpecificationIEC61360/dataType one of: INTEGER_MEASURE, REAL_MEASURE, RATIONAL_MEASURE, INTEGER_CURRENCY, REAL_CURRENCY, then DataSpecificationIEC61360/unit or DataSpecificationIEC61360/unitId shall be defined.

Nc	V3.0RC02	New, Update, Removed, Reformulated	Comment
(x)	AASc-010	New	Constraint AASc-010: If DataSpecificationIEC61360/value is not empty then DataSpecificationIEC61360/valueList shall be empty and vice versa

Metamodel Changes V3.0RC02 vs. V3.0RC01 – Security Part

Changes:

- Removed, because deprecated: policy decision point, policy enforcement point, and policy information points are not part of information model but of server infrastructure hosting the Asset Administration Shells
- Removed: Certificate Handling not part of information model but of server infrastructure hosting the Asset Administration Shells

Template 59. Changes w.r.t. Security

Nc	V3.0RC02 Change w.r.t. V3.0RC01	Comment
x	AccessControlPolicyPoints/policyAdministrationPoint	Type changed from PolicyAdministrationPoint to AccessControl
x	AccessControlPolicyPoints/policyDecisionPoint	Removed
x	AccessControlPolicyPoints/policyEnforcementPoint	Removed
x	AccessControlPolicyPoints/policyInformationPoint	Removed
x	AccessPermissionRule	No longer inherits from referable No longer inherits from qualifiable
x	BlobCertificate	Removed
x	Certificate	Removed
x	Formula	Now abstract class, only used in security part (no longer used in Qualifiables)
x	Formula/dependsOn	Removed attribute
x	PolicyAdministrationPoint	Removed
x	policyDecisionPoint	Removed
x	policyEnforcementPoint	Removed
x	policyInformationPoints	Removed
x	Security/certificate	Removed
x	Security/requiredCertificateExtension	Removed

Template 60. New Elements in Metamodel Security

Nc	V3.0RC02 vs. V3.0RC01	Comment
	AccessPermissionRule/constraint	Substitute for inherited attributes from Qualifiable

Template 61. New, Changed or Removed Constraints Security

Nc	V3.0RC02 vs. V3.0RC01	New, Update, Removed, Reformulated	Comment
	AASs-009	Removed	Removed since class PolicyAdministrationPoint was removed Constraint AASs-009: Either there is an external policy administration point endpoint defined (PolicyAdministrationPoint/externalPolicyDecisionPoints=true) or the AAS has its own access control
	AASs-015	Updated	Constraint AASs-015: Every data element in SubjectAttributes/subjectAttributes shall be part of the submodel that is referenced within the "selectableSubjectAttributes" attribute of "AccessControl".

Changes V3.0RC01 vs. V2.0.1

Metamodel Changes V3.0RC01 w/o Security Part

Major changes:

- idShort of Submodels etc. no longer need to be unique in the context of an Asset Administration Shell
- Constraints implicitly contained in text were formalized and numbered
- Revised concept on handling of Asset and assetIdentificationModel (assetInformation)
- ConceptDictionaries not supported any longer
- semanticId no longer mandatory for SubmodelElement
- More than one bill of material for assetInformation in Asset Administration Shell
- Local attribute in References removed
- Parent attribute in Referables removed
- Abstract class HasExtension introduced
- AASX file exchange format: no splitting of an Asset Administration Shell allowed any longer (i.e. relationship type aas-spec-split removed)

Template 62. Changes w.r.t. V2.0 w/o Security

Nc	V3.0RC01 Change w.r.t. V2.0.1	Comment
	anySimpleTypeDef	Type removed, was not used in any class definition any longer, was mentioned in text only
x	AssetAdministrationShell/asset	Removed, substituted by AssetAdministrationShell/assetInformation (no reference any longer, instead now aggregation)

Nc	V3.0RC01 Change w.r.t. V2.0.1	Comment
x	Asset/assetKind	Attribute "assetKind" moved to AssetAdministrationShell/AssetInformation
x	Asset/assetIdentificationModel	Attribute "assetIdentificationModel" removed, substituted by AssetInformation /IdentifierKeyValuePairs
x	Asset/billOfMaterial	Attribute "billOfMaterial" moved to AssetAdministrationShell/AssetInformation
x	AssetAdministrationShell/conceptDictionaries	Removed
	ConceptDescription/isCaseOf	Text changed, no global reference requested, just reference
x	ConceptDictionary	Removed
x	Entity/asset	Removed, substituted by Entity/globalAssetId and Entity/specificAssetId
x	Key/local	Local attribute removed
x	Referable/parent	Parent attribute removed

Template 63. New Elements in Metamodel V3.0RC01 w/o Security

Nc	V3.0RC01 vs. V2.0.1	Comment
x	AssetAdministrationShell/assetInformation	Substitute for AssetAdministrationShell/asset (no reference any longer, instead aggregation)
	AssetInformation	with attributes/functionality from former class Asset because not specific to Asset but AAS
	AssetInformation/thumbnail	Optional Attribute of new class AssetInformation that was not available in Asset class before
x	Entity/globalAssetId	Substitute for Entity/asset (together with Entity/specificAssetId)
x	Entity/specificAssetId	Substitute for Entity/asset (together with Entity/globalAssetId)
	Extension	New class, part of new abstract class HasExtensions
	HasExtensions	New abstract class, inherited by Referable
	IdentifierKeyValuePair	New class for AssetInformation/specificAssetId
	Referable/displayName	New optional attribute for all referables

Template 64. New, Changed or Removed Constraints w/o Security

Nc	V3.0RC01	New, Update, Removed, Reformulated	Comment
	AASd-001	Removed	Constraint AASd-001: In case of a referable element not being an identifiable element this id is mandatory and used for referring to the element in its name space. For namespace part see AASd-022
x	AASd-002	Update	reformulated, formula added <i>idShort of Referables shall only feature letters, digits, underscore (""); starting mandatory with a letter. I.e. [a-zA-Z][a-zA-Z0-9]+</i>
	AASd-010	Reformulated	Constraint AASd-010: The property has the category "CONSTANT". Reformulated to Constraint AASd-010: The property referenced in Permission/permission shall have the category "CONSTANT".
	AASd-011	Reformulated	Constraint AASd-011: The property referenced in Permission/permission shall be part of the submodel that is referenced within the "selectablePermissions" attribute of "AccessControl".
	AASd-012	Reformulated	Constraint AASd-012: If both the MultiLanguageProperty/value and the MultiLanguageProperty/valueId are present then for each string in a specific language the meaning must be the same as specified in MultiLanguageProperty/valueId
	AASd-014	Reformulated	Entity was changed Constraint AASd-014: Either the attribute globalAssetId or specificAssetId of an <i>Entity</i> must be set if <i>Entity/entityType</i> is set to "SelfManagedEntity". They are not existing otherwise.
(x)	AASd-020	New	Constraint AASd-020: The value of Property/value shall be consistent to the data type as defined in Property/valueType.
(x)	AASd-021	New	Constraint AASd-021: Every qualifiable can only have one qualifier with the same <i>Qualifier/type</i>.
(x)	AASd-022	New	Part from AASd-001 after split Constraint AASd-022: idShort of non-identifiable referables shall be unique in its namespace.
(x)	AASd-026	New	Constraint AASd-026: If allowDuplicates==false then it is not allowed that the collection contains several elements with the same semantics (i.e. the same semanticId).
(x)	AASd-050	New	Constraint AASd-050: If the DataSpecificationContent DataSpecificationIEC61360 is used for an element then the value of hasDataSpecification/dataSpecification shall contain the global reference to the IRI of the corresponding data specification template http://admin-shell.io/DataSpecificationTemplates/DataSpecificationIEC61360/2/0.

Nc	V3.0RC01	New, Update, Removed, Reformulated	Comment
(x)	AASd-051	New	Constraint AASd-051: A ConceptDescription shall have one of the following categories: VALUE, PROPERTY, REFERENCE, DOCUMENT, CAPABILITY, RELATIONSHIP, COLLECTION, FUNCTION, EVENT, ENTITY, APPLICATION_CLASS, QUALIFIER, VIEW. Default: PROPERTY.
(x)	AASd-052a	New	Constraint AASd-052a: If the semanticId of a Property references a ConceptDescription then the ConceptDescription/category shall be one of following values: VALUE, PROPERTY.
(x)	AASd-052b	New	Constraint AASd-052b: If the semanticId of a MultiLanguageProperty references a ConceptDescription then the ConceptDescription/category shall be one of following values: PROPERTY.
(x)	AASd-053	New	Constraint AASd-053: If the semanticId of a Range submodel element references a ConceptDescription then the ConceptDescription/category shall be one of following values: PROPERTY.
(x)	AASd-054	New	Constraint AASd-054: If the semanticId of a ReferenceElement submodel element references a ConceptDescription then the ConceptDescription/category shall be one of following values: REFERENCE.
(x)	AASd-055	New	Constraint AASd-055: If the semanticId of a RelationshipElement or an AnnotatedRelationshipElement submodel element references a ConceptDescription then the ConceptDescription/category shall be one of following values: RELATIONSHIP.
(x)	AASd-056	New	Constraint AASd-056: If the semanticId of an Entity submodel element references a ConceptDescription then the ConceptDescription/category shall be one of following values: ENTITY. The ConceptDescription describes the elements assigned to the entity via Entity/statement.
(x)	AASd-057	New	Constraint AASd-057: The semanticId of a File or Blob submodel element shall only reference a ConceptDescription with the category DOCUMENT.
(x)	AASd-058	New	Constraint AASd-058: The semanticId of a Capability submodel element shall only reference a ConceptDescription with the category CAPABILITY.
(x)	AASd-059	New	Constraint AASd-059: The semanticId of a SubmodelElementCollection submodel element shall only reference a ConceptDescription with the category COLLECTION or ENTITY.
(x)	AASd-060	New	Constraint AASd-060: If the semanticId of an Operation submodel element references a ConceptDescription then the category of the ConceptDescription shall be one of the following values: FUNCTION.
(x)	AASd-061	New	Constraint AASd-061: If the semanticId of an Event submodel element references a ConceptDescription then the category of the ConceptDescription shall be one of the following values: EVENT.

Nc	V3.0RC01	New, Update, Removed, Reformulated	Comment
(x)	AASd-062	New	Constraint AASd-062: If the <i>semanticId</i> of a <i>Property</i> references a <i>ConceptDescription</i> then the <i>ConceptDescription/category</i> shall be one of following values: APPLICATION_CLASS.
(x)	AASd-063	New	Constraint AASd-063: If the <i>semanticId</i> of a <i>Qualifier</i> references a <i>ConceptDescription</i> then the <i>ConceptDescription/category</i> shall be one of following values: QUALIFIER.
(x)	AASd-064	New	Constraint AASd-064: If the <i>semanticId</i> of a <i>View</i> references a <i>ConceptDescription</i> then the category of the <i>ConceptDescription</i> shall be VIEW.
(x)	AASd-065	New	Constraint AASd-065: If the <i>semanticId</i> of a <i>Property</i> or <i>MultiLanguageProperty</i> references a <i>ConceptDescription</i> with the category VALUE then the value of the property is identical to <i>DataSpecificationIEC61360/value</i> and the <i>valueId</i> of the property is identical to <i>DataSpecificationIEC61360/valueId</i> .
(x)	AASd-066	New	Constraint AASd-066: If the <i>semanticId</i> of a <i>Property</i> or <i>MultiLanguageProperty</i> references a <i>ConceptDescription</i> with the category PROPERTY and <i>DataSpecificationIEC61360/valueList</i> is defined the value and <i>valueId</i> of the property is identical to one of the value reference pair types references in the value list, i.e. <i>ValueReferencePair/value</i> or <i>ValueReferencePair/valueId</i> , resp.
(x)	AASd-067	New	Constraint AASd-067: If the <i>semanticId</i> of a <i>MultiLanguageProperty</i> references a <i>ConceptDescription</i> then <i>DataSpecificationIEC61360/dataType</i> shall be STRING_TRANSLATABLE.
(x)	AASd-068	New	Constraint AASd-068: If the <i>semanticId</i> of a <i>Range</i> submodel element references a <i>ConceptDescription</i> then <i>DataSpecificationIEC61360/dataType</i> shall be a numerical one, i.e. REAL_* or RATIONAL_*.
(x)	AASd-069	New	Constraint AASd-069: If the <i>semanticId</i> of a <i>Range</i> references a <i>ConceptDescription</i> then <i>DataSpecificationIEC61360/levelType</i> shall be identical to the set {Min, Max}.
(x)	AASd-070	New	Constraint AASd-070: For a <i>ConceptDescription</i> with category PROPERTY or VALUE using data specification template IEC61360 (http://admin-shell.io/DataSpecificationTemplates/DataSpecificationIEC61360/2/0) - <i>DataSpecificationIEC61360/dataType</i> is mandatory and shall be defined.
(x)	AASd-071	New	Constraint AASd-071: For a <i>ConceptDescription</i> with category REFERENCE using data specification template IEC61360 (http://admin-shell.io/DataSpecificationTemplates/DataSpecificationIEC61360/2/0) - <i>DataSpecificationIEC61360/dataType</i> is STRING by default.
(x)	AASd-072	New	Constraint AASd-072: For a <i>ConceptDescription</i> with category DOCUMENT using data specification template IEC61360 (http://admin-shell.io/DataSpecificationTemplates/DataSpecificationIEC61360/2/0) - <i>DataSpecificationIEC61360/dataType</i> shall be one of the following values: STRING or URL.

Nc	V3.0RC01	New, Update, Removed, Reformulated	Comment
(x)	AASd-073	New	Constraint AASd-073: For a ConceptDescription with category QUALIFIER using data specification template IEC61360 (http://admin-shell.io/DataSpecificationTemplates/DataSpecificationIEC61360/2/0) - DataSpecificationIEC61360/dataType is mandatory and shall be defined.
(x)	AASd-074	New	Constraint AASd-074: For all ConceptDescriptions except for ConceptDescriptions of category VALUE using data specification template IEC61360 (http://admin-shell.io/DataSpecificationTemplates/DataSpecificationIEC61360/2/0) - DataSpecificationIEC61360/definition is mandatory and shall be defined at least in English.
(x)	AASd-075	New	Constraint AASd-075: For all ConceptDescriptions using data specification template IEC61360 (http://admin-shell.io/DataSpecificationTemplates/DataSpecificationIEC61360/2/0) values for the attributes not being marked as mandatory or optional in tables Table 6, Table 7, Table 8 and Table 9. depending on its category are ignored and handled as undefined.
	AASd-077	New	Constraint AASd-077: The name of an extension within HasExtensions needs to be unique.
(x)	AASd-080	New	Constraint AASd-080: In case <i>Key/type == GlobalReference idType</i> shall not be any <i>LocalKeyType (IdShort, FragmentId)</i> .
	AASd-081	New	Constraint AASd-081: In case <i>Key/type==AssetAdministrationShell Key/idType</i> shall not be any <i>LocalKeyType (IdShort, FragmentId)</i> .
(x)	AASd-092	New	Constraint AASd-092: If the semanticId of a SubmodelElementCollection with SubmodelElementCollection/allowDuplicates == false references a ConceptDescription then the ConceptDescription/category shall be ENTITY.
(x)	AASd-093	New	Constraint AASd-093: If the semanticId of a SubmodelElementCollection with SubmodelElementCollection/allowDuplicates == true references a ConceptDescription then the ConceptDescription/category shall be COLLECTION.
	AASd-100	New	Constraint AASd-100: An attribute with data type "string" is not allowed to be empty.

Metamodel Changes V3.0RC01 – Security Part

Major changes:

- Constraints for security part renamed from pattern AASd- to AASs-.
- Only bugfixes

Template 65. New, Changed or Removed Constraints Security

Nc	V3.0RC01	New, Update, Removed, Reformulated	Comment
	AASd-010	Removed	Renamed to AASs-010 (see NEW)
	AASs-010	NEW	Reformulation of AASd-010 Constraint AASs-010: The property referenced in Permission/permission shall have the category "CONSTANT".
	AASd-011	Removed	Renamed to AASs-011 (see NEW)
	AASs-011	NEW	Reformulation of AASd-011 Constraint AASs-011: The property referenced in Permission/permission shall be part of the submodel that is referenced within the "selectablePermissions" attribute of "AccessControl".
	AASd-015	Removed	Renamed to AASs-015 (see NEW)
	AASs-015	NEW	Constraint AASd-015: The data element SubjectAttributes/subjectAttribute shall be part of the submodel that is referenced within the "selectableSubjectAttributes" attribute of "AccessControl".

Changes V2.0.1 vs. V2.0

Metamodel Changes V2.0.1 w/o Security Part

Major changes:

- Only bugfixes

Template 66. Changes w.r.t. V2.0.1 w/o Security

Nc	V2.0.1 Change w.r.t. V2.0	Comment
	DataTypeIEC61360/INTEGER_COUNT	Bugfix, was missing
	DataTypeIEC61360/INTEGER_MEASURE	Bugfix, was missing
	DataTypeIEC61360/INTEGER_CURRENCY	Bugfix, was missing
	hasDataSpecification	Bugfix, is abstract class – was mixed up with DataSpecification class that is not abstract
	DataSpecification	Bugfix, is not abstract
	AnnotatedRelationshipElement/annotation	Bugfix, Annotation ist not a reference to Data Elements

Template 67. New, Changed or Removed Constraints w/o Security

Nc	V2.0.1	New, Update, Removed	Comment
	AASd-001	update	idShort now mandatory Constraint AASd-001: an identifiable element this id is mandatory and used for referring to the element in its name space. Constraint AASd-001: In case of a referable element not being an identifiable element this ID is used for referring to the element in its name space.
	AASd-013	Removed	Constraint AASd-013: In case of a range with kind=Instance either the min or the max value or both need to be defined.

Changes V2.0 vs. V1.0

Metamodel Changes V2.0 w/o Security Part

Major changes:

- Composite I4.0 Components supported via new Entity submodel element and billOfMaterial
- Event submodel element introduced
- Capability submodel element introduced
- Annotatable relationship submodel element introduced
- MultiLanguageProperty submodel element introduced
- Range submodel element introduced
- Data Specification Template IEC61360 extended for Values, ValueLists and Ranges
- Referencing of fragments within a file etc. now also supported

Template 68. Changes w.r.t. V1.0 w/o Security

Nc	V2.0 Change w.r.t. V1.0	Comment
(x) [5]	anySimpleTypeDef	Type now starts with capital letter: AnySimpleTypeDef Type changed from string to values representing xsd-type anySimpleType
	Asset	Does not inherit from HasKind any longer (but attribute kind remains)
	Asset/kind	Now of type "AssetKind" instead of "Kind". Instead of value Type and Instance now value Template and Instance
	AssetAdministrationShell/security	Now optional to support passive AAS of type 1
	Code	Data type removed, no longer used
x	DataSpecificationIEC61360/shortName	Type changed from string to LangStringSet Cardinality changed from mandatory to optional
x	DataSpecificationIEC61360/sourceOfDefinition	Type changed from langString to string

Nc	V2.0 Change w.r.t. V1.0	Comment
(x) [6]	DataSpecificationIEC61360/dataType	Type changed from string to Enumeration Cardinality changed from mandatory to optional
x	DataSpecificationIEC61360/code	Attribute code removed
	DataSpecificationIEC61360/definition	Cardinality changed from mandatory to optional
	HasDataSpecification	Was abstract before
	HasDataSpecification/hasDataSpecification	Renamed to HasDataSpecification/dataSpecification
x	HasKind/kind	Now of type "ModellingKind" instead of "Kind". Values changed: Type now Template; Instance remains
x	File/value	File name not without but with extension
x	Identifiable/description	Type changed from langString to LangStringSet
x	IdentifierType/URI	URI renamed to IRI
	Kind	Type Kind removed and substituted by types AssetKind and ModellingKind
x	OperationVariable	No longer inherits from SubmodelElement
	Property/value	Type changed from anySimpleTypeDef to ValueDataType
x	Qualifier/qualifierType	Renamed to Qualifier/type
x	Qualifier/qualifierValue	Renamed to Qualifier/value Type changed from AnySimpleTypeDef to ValueDataType
x	Qualifier/qualifierValueId	Renamed to Qualifier/valueId
x	Referable/idShort	Now mandatory, was optional (but with constraints for defined elements)
x	Reference/key	Cardinality changed from 0..* to 1..*

Template 69. New Elements in Metamodel V1.0 w/o Security

*V2.0	Comment
AnnotatedRelationshipElement	New submodel element, inheriting from RelationshipElement
Asset/billOfMaterial	New attribute
AssetKind	New enumeration type

*V2.0	Comment
BasicEvent	New submodel element, inherits from Event
Capability	New submodel element
DataSpecificationIEC61360/valueList	For value lists (string)
DataSpecificationIEC61360/value	For coded and explicit values
DataSpecificationIEC61360/valueId	For coded values
DataSpecificationIEC61360/levelType	For Ranges
DataSpecificationPhysicalUnit	New data specification template
DataTypeIEC61360	New enumeration type
Entity	New submodel Element
EntityType	New enumeration type
IdentifierType	Is a subset of KeyType Enumeration
KeyElements/FragmentReference	New value FragmentReference as part of KeyElements Enumeration
LocalKeyType	Is a subset of KeyType Enumeration
LocalKeyType/FragmentId	New value for KeyType Enumeration (via subset LocalKeyType)
LangStringSet	New type, used for example in MultiLanguageProperty
LevelType	New enumeration type
ModellingKind	New enumeration type
MultiLanguageProperty	New submodel element
Qualifier/valueType	New attribute to be consistent with valueType of Property etc.
Range	New submodel element
ReferableElements/BasicEvent	New enumeration value
ReferableElements/Capability	New enumeration value
ReferableElements/Event	New enumeration value
ReferableElements/MultiLanguageProperty	New enumeration value
ReferableElements/Range	New enumeration value
ValueDataType	New type, used for example for Property value

*V2.0	Comment
ValueList	New class
ValueReferencePairType	New class

Template 70. New, Changed or Removed Constraints w/o Security

Nc	V2.0	New, Update, Removed	Comment
	AASd-007	update	Reformulated Constraint AASd-007: if both, the value and the valueId are present then the value needs to be identical to the value of the referenced coded value in valueId.
	AASd-008	update	Reformulated Constraint AASd-008: The submodel element value of an operation variable shall be of kind=Template.
	AASd-025	removed	Redundant to AASd-015 Constraint AASd-025: The data element shall be part of the submodel that is referenced within the "selectableSubjectAttributes" attribute of "AccessControl".

Metamodel Changes V2.0 – Security Part

Template 71. Changes Metamodel w.r.t. V1.0 Security

Nc	V2.0 Change w.r.t. V1.0	Comment
x	AccessControl/selectableEnvironmentAttributes	Type changed from Submodel to Submodel*
	AccessPermissionRule/permissionsPerObject	Cardinality now consistent for figure and table: 0..*
x	AccessPermissionRule/targetSubjectAttributes	Cardinality changed from 1..* to 1
	Certificate	Was abstract, now not abstract and contains attributes (see in table New)
x	PermissionKind/allow	Now PermissionKind/Allow starts with capital letter for enumeration values
x	PermissionKind/deny	Now PermissionKind/Deny starts with capital letter for enumeration values
x	PermissionKind/not applicable	Now PermissionKind/NotApplicable starts with capital letter for enumeration values
x	PermissionKind/Undefined	Now PermissionKind/Undefined starts with capital letter for enumeration values

Nc	V2.0 Change w.r.t. V1.0	Comment
	PermissionsPerObject	Name now consistent in figure and table (in table PermissionPerObject, needs to be PermissionsPerObject)
x	PolicyAdministrationPoint/externalAccessControl	Type changed from Endpoint to Boolean, cardinality 1
x	PolicyInformationPoints/externalInformationPoint	Type changed from Endpoint to Boolean, cardinality 1 externalInformationPoint renamed to externalInformationPoints
x	Security/trustAnchor	Renamed to Security/certificate

Template 72. New Elements in Metamodel w.r.t. Security

*V2.0	Comment
BlobCertificate	New class inheriting from Certificate
Certificate	Abstract class: was foreseen in V1.0 but not yet modelled
Security/requiredCertificateExtension	New attribute
PolicyEnforcementPoint	Was foreseen in V1.0 but not yet modelled
PolicyEnforcementPoint/externalPolicyEnforcementPoint	
PolicyDecisionPoint	Was foreseen in V1.0 but not yet modelled
PolicyDecisionPoint/externalPolicyDecisionPoint	

- [1] Derived Schemata used Base64Binary and not hexBinary, therefore this change is considered to be backward compatible for most applications.
- [2] Since *HasKind/kind* had the default *Instance*, this change has no impact if the attribute was omitted for submodel instances.
- [3] Every model valid for V3.0RC02 is still valid in V3.0RC01, however there might be implementations that need to be changed if they assumed that the user can type case-insensitive names and get all elements that match the name in a case-insensitive way.
- [4] Every model valid for V3.0RC02 is still valid in V3.0RC01, however there might be implementations that need to be changed if they assumed that the user can type case-insensitive names and get all elements that match the name in a case-insensitive way.
- [5] There was an implicit constraint restricting the values to the values in the enumeration. This is now formalized.
- [6] There was an implicit constraint that only IEC61360 data types are allowed to be used. This is now formalized.

Bibliography

- [1] "Recommendations for implementing the strategic initiative INDUSTRIE 4.0", acatech, April 2013. Accessed: 2025-03-24. [Online]. Available: <https://en.acatech.de/publication/recommendations-for-implementing-the-strategic-initiative-industrie-4-0-final-report-of-the-industrie-4-0-working-group/>
- [2] "Implementation Strategy Industrie 4.0: Report on the results of the Industrie 4.0 Platform"; BITKOM e.V. / VDMA e.V., /ZVEI e.V., April 2015. Accessed: 2025-03-24. [Online]. Available: <https://www.bitkom.org/Bitkom/Publikationen/Implementation-Strategy-Industrie-40-Report-on-the-results-of-the-Industrie-40-Platform.html>
- [3] DIN SPEC 91345:2016-04 "Referenzarchitekturmodell Industrie 4.0 (RAMI4.0) / Reference Architecture Model Industrie 4.0 (RAMI4.0) / Modèle de reference de l'architecture de l'industrie 4.0 (RAMI4.0)", ICS 03.100.01; 25.040.01; 35.240.50, April 2016. Accessed: 2025-03-24. [Online]. Available: <https://www.beuth.de/en/technical-rule/din-spec-91345-en/250940128>
- [4] "Structure of the Administration Shell, continuation of the development of the reference model for the Industrie 4.0 component", Plattform Industrie 4.0, Working Paper, April 2016. [Online]. Available: <https://www.plattform-i40.de/PI40/Redaktion/EN/Downloads/Publikation/structure-of-the-administration-shell.html>
- [5] "Which criteria do Industrie 4.0 products need to fulfil? Guideline 2020", Federal Ministry for Economic Affairs and Energy (BMWi), July 2020. Accessed: 2025-03-24. [Online]. Available: https://www.plattform-i40.de/PI40/Redaktion/EN/Downloads/Publikation/criteria-industrie-40-products_2020.html
- [6] (German) "Beispiele zur Verwaltungsschale der Industrie 4.0-Komponente – Basisteil"; ZVEI e.V., Whitepaper, November 2016. Accessed: 2025-03-24. [Online]. Available: <https://www.zvei.org/presse-medien/publikationen/beispiele-zur-verwaltungsschale-der-industrie-40-komponente-basisteil/>
- [7] "Aspects of the research roadmap in application scenarios", Plattform Industrie 4.0, working paper, April 2016. Accessed: 2025-03-24. [Online]. Available: <http://www.plattform-i40.de/I40/Redaktion/EN/Downloads/Publikation/aspects-of-the-research-roadmap.html>
- [8] (German) "Fortschreibung der Anwendungsszenarien der Plattform Industrie 4.0"; Plattform Industrie 4.0, Ergebnispapier, October 2016. Accessed: 2025-03-24. [Online]. Available: <https://www.plattform-i40.de/I40/Redaktion/DE/Downloads/Publikation/fortschreibung-anwendungsszenarien.html>
- [9] "Security in RAMI4.0", Plattform Industrie 4.0, Berlin, technical overview, April 2016. Accessed: 2025-03-24. [Online]. Available: <http://www.plattform-i40.de/I40/Redaktion/EN/Downloads/Publikation/security-rami40-en.html>
- [10] "Die Deutsche Normungs-Roadmap Industrie 4.0 / The German standardization roadmap Industrie 4.0", DKE Deutsche Kommission Elektrotechnik, Elektronik Informationstechnik im DIN und VDE, Version 2.0, 2015. Accessed: 2025-03-24. [Online]. Available: <https://www.din.de/de/forschung-und-innovation/themen/industrie4-0/roadmap-industrie40-62178>
- [11] "Weiterentwicklung des Interaktionsmodells für Industrie 4.0-Komponenten", Plattform Industrie 4.0, discussion paper, November 2016. Accessed: 2025-03-24. [Online]. Available: <https://www.plattform-i40.de/I40/Redaktion/DE/Downloads/Publikation/interaktionsmodell-i40-komponenten-it-gipfel.html>
- [12] "Definition of terms relating to Industrie 4.0", VDI/VDE-GMA Fachausschuss 7.21. Accessed: 2025-03-24. [Online]. Available: <https://www.eks-intec.de/i40-begriffe/FA7.21%20Begriffe%20-%20Industrie%204.0>
- [13] "Relationships between I4.0 Components – Composite Components and Smart Production", Plattform Industrie 4.0, Berlin, working paper, June 2017. Accessed: 2025-03-24. [Online]. Available: <https://www.plattform-i40.de/I40/Redaktion/EN/Downloads/Publikation/hm-2018-relationship.html>
- [14] "Industrie 4.0 Plug-and-Produce for Adaptable Factories"; Plattform Industrie 4.0, Berlin, working paper, June 2017. Accessed: 2025-03-24. [Online]. Available: <https://www.plattform-i40.de/IP/Redaktion/DE/Downloads/Publikation/Industrie-40-20Plug-and-Produce.html>
- [15] "Security der Verwaltungsschale / Security of the Administration Shell", Plattform Industrie 4.0, Berlin, working

paper, April 2017. Accessed: 2025-03-24. [Online]. Available: <http://www.plattform-i40.de/I40/Redaktion/DE/Downloads/Publikation/security-der-verwaltungsschale.html>

[16] DIN SPEC 92000:2019-09 "Data Exchange on the Base of Property Value Statements (PVSX)", 2019 September. Withdrawn. This document has been replaced by: DIN SPEC 92000:2020-08. Accessed: 2025-03-24. [Online]. Available: <https://www.dinmedia.de/en/technical-rule/din-spec-92000/320981982>

[17] "(German) Verwaltungsschale in der Praxis. Wie definiere ich Teilmodelle, beispielhafte Teilmodelle und Interaktion zwischen Verwaltungsschalen", Version 1.0, April 2019, Plattform Industrie 4.0 in Kooperation mit VDI/VDE-GMA Fachausschuss 7.20, Federal Ministry for Economic Affairs and Energy (BMWi). Accessed: 2025-03-24. [Online]. Available: <https://www.plattform-i40.de/PI40/Redaktion/DE/Downloads/Publikation/2019-verwaltungsschale-in-der-praxis.html>

[18] (German) "I4.0-Sprache. Vokabular, Nachrichtenstruktur und semantische Interaktionsprotokolle der I4.0-Sprache", Plattform Industrie 4.0 in Kooperation mit VDI/VDE-GMA Fachausschuss 7.20, April 2018. Accessed: 2025-03-24. [Online]. Available: <https://www.plattform-i40.de/I40/Redaktion/DE/Downloads/Publikation/hm-2018-sprache.html>

[19] "The Structure of the Administration Shell: TRILATERAL PERSPECTIVES from France, Italy and Germany", March 2018, Accessed: 2025-03-24. [Online]. Available: <https://www.plattform-i40.de/I40/Redaktion/EN/Downloads/Publikation/hm-2018-trilaterale-coop.html>

[20] "Industrial automation systems and integration — Exchange of characteristic data — Part 10: Characteristic data exchange format", Technical Specification ISO/TS 29002-10:2009-12(E), 2009. Accessed: 2025-03-24. [Online]. Available: <https://www.dinmedia.de/de/vornorm/iso-ts-29002-10/125041143>

[21] "Smart Manufacturing - Reference Architecture Model Industry 4.0 (RAMI4.0)", IEC PAS 63088:2017, International Electrotechnical Commission (IEC), 2017. Withdrawn. Accessed: 2025-03-24. [Online]. Available: <https://webstore.iec.ch/en/publication/30082>

[22] "System.IO.Packaging Namespace", MSDN. Accessed: 2025-03-24. [Online]. Available: [https://msdn.microsoft.com/en-us/library/system.io.packaging\(v=vs.110\).aspx](https://msdn.microsoft.com/en-us/library/system.io.packaging(v=vs.110).aspx)

[24] ISO 13584-42 "Standard data element types with associated classification scheme – Part 1: Definitions – Principles and methods" Edition 4.0, 2017-07.

[25] IEC 61360-1 "Standard data element types with associated classification scheme – Part 1: Definitions – Principles and methods", Edition 4.0, 2017-07. DIN EN 61360-1:2018-07.

[26] ISO/TS 29002-10:2009(E) "Industrial automation systems and integration — Exchange of characteristic data — Part 10: Characteristic data exchange format", First edition 2009-12-01.

[27] A. Bayha, J. Bock, B. Boss, C. Diedrich, S. Malakuti "Describing Capabilities of Industrie 4.0 Components". Nov. 2020. Plattform Industrie 4.0. Accessed: 2025-03-24. [Online]. Available: https://www.plattform-i40.de/PI40/Redaktion/EN/Downloads/Publikation/Capabilities_Industrie40_Components.html

[29] H. Knublauch, D. Knotokostas "Shapes Constraint Language (SHACL)" W3C Recommendation, 2017. Accessed: 2025-03-24. [Online]. Available: <https://www.w3.org/TR/shacl/>

[32] F. Manola, E. Miller "RDF 1.1 Primer" W3C Recommendation, 2014, Accessed: 2025-03-24. [Online]. Available: <https://www.w3.org/TR/rdf11-primer/>

[33] T. R. Gruber "A translation approach to portable ontology specifications." Knowledge acquisition 5.2 (1993): 199-220. Accessed: 2025-03-24. [Online]. Available: <https://tomgruber.org/writing/ontolingua-kaj-1993.htm>

[34] "The Industrial Internet of Things Vocabulary". Technical Report. Version 2.3. October 10, 2020. Industrial Internet Consortium. IIC:IIVOC:V2.3:20201025 Accessed: 2025-10-19. [Online]. Available: <https://www.iiconsortium.org/vocab/>

[35] "OMG Unified Modelling Language (OMG UML)". Formal/2017-12-05. Version 2.5.1. December 2018. Accessed: 2025-10-19. [Online] Available: <https://www.omg.org/spec/UML/>

- [36] T. Preston-Werner "Semantic Versioning". Version 2.0.0. Accessed: 2025-10-19. [Online] Available: <https://semver.org/spec/v2.0.0.html>
- [37] IDTA-01002 "Specification of the Asset Administration Shell Part 2 – Application Programming Interfaces". See [46].
- [38] "Asset Administration Shell. Reading Guide". Industrial Digital Twin Association. November 2022. Accessed: 2025-03-24. [Online]. Available: https://industrialdigitaltwin.org/en/wp-content/uploads/sites/2/2022/12/2022-12-07_IDTA_AAS-Reading-Guide.pdf
- [39] IDTA-02003 "Submodel Template of the Asset Administration Shell - Generic Frame for Technical Data for Industrial Equipment in Manufacturing", Version 1.2, Aug. 2022, Industrial Digital Twin Association See [45].
- [40] IDTA-02006 "Submodel Template of the Asset Administration Shell - Digital Nameplate for Industrial Equipment", Version 2.0, Oct. 2022, Industrial Digital Twin Association See [45].
- [43] IEC 63278-2 "Asset Administration Shell for industrial applications – Part 2: Metamodel".
- [44] IEC 63278-1:2023 "Asset Administration Shell for industrial applications – Part 1: Asset Administration Shell structure".
- [45] "Registered AAS Submodel Templates". Industrial Digital Twin Association. Accessed: 2025-03-24. [Online]. Available: <https://industrialdigitaltwin.org/en/content-hub/submodels>
- [46] "AAS Specifications". Accessed: 2025-03-24. [Online]. Available: <https://industrialdigitaltwin.org/en/content-hub/aasspecifications>
- [47] (German) "I4.0-Sprache. Vokabular, Nachrichtenstruktur und semantische Interaktionsprotokolle der I4.0-Sprache", Discussion Paper. Plattform Industrie 4.0 Accessed: 2025-03-24. [Online]. Available: <https://www.plattform-i40.de/IP/Redaktion/DE/Downloads/Publikation/hm-2018-sprache.html>
- [48] "How to create a Submodel template specification". V1.1. June 2025. Industrial Digital Twin Association. Guideline. Accessed: 2025-10-19. [Online]. Available: https://industrialdigitaltwin.org/wp-content/uploads/2025/06/IDTA_How-to-write-a-SMT-v1.1.pdf
- December 2022. Industrial Digital Twin Association. Accessed: 2025-03-24. [Online]. Available: <https://industrialdigitaltwin.org/wp-content/uploads/2022/12/I40-IDTA-WS-Process-How-to-write-a-SMT-FINAL-.pdf>
- [49] Vincent Hu, David Ferraiolo, Rick Kuhn, Adam Schnitzer, Kenneth Sandlin, Robert Miller and Karen Scarfone, "Guide to Attribute Based Access Control (ABAC) Definition and Considerations", NIST Special Publication 800-162, Jan. 2014. Accessed: 2025-03-24. [Online]. Available: <http://dx.doi.org/10.6028/NIST.SP.800-162>
- [50] "Secure Download Service", Discussion Paper. Oct. 2020, Plattform Industrie 4.0 Accessed: 2025-03-24. [Online]. Available: https://www.plattform-i40.de/PI40/Redaktion/EN/Downloads/Publikation/secure_downloadservice.html
- [51] "Repository of the Industrial Digital Twin Association (IDTA)". Industrial Digital Twin Association. Accessed: 2025-03-24. [Online]. Available: <https://github.com/admin-shell-io>